

# DSSV Pressure Drop: Descriptive Report

## Mariana Southern Priority Areas May 4-6 & 26-31, 2020

Report developed for Caladan Oceanic by Cassie Bongiovanni

Internal Use Only



## Table of Contents

List of Figures .....	3
List of Tables .....	4
0.0 Survey Information .....	5
0.1 Survey Limits.....	5
0.2 Survey Purpose .....	6
0.3 Survey Plans.....	6
0.4 Survey Quality.....	7
0.5 Survey Coverage .....	7
0.6 Survey Statistics .....	7
1. Data Acquisition and Processing .....	8
1.1 Equipment and Vessel.....	8
1.2 Uncertainty.....	9
1.3 Junctioning Surveys.....	11
1.3.1 GEBCO 2019 Comparison .....	11
1.3.2 Summary.....	12
1.4 Sound Speed .....	13
1.5 Data Corrections .....	14
1.6 Calibrations.....	14
1.6.1 Patch Test .....	14
1.6.2 Backscatter Calibration .....	17
1.7 Backscatter .....	17
1.8 Processing Software.....	18
1.9 Surfaces .....	18
2. Vertical and Horizontal Control.....	18
2.1 Vertical Control.....	18
2.2 Horizontal Control .....	18



## List of Figures

Figure 1: Bathymetry collected within the Southern Mariana Trench NOAA priority areas collected with the Kongsberg EM 124 over GEBCO 2019 estimated bathymetry. ....	5
Figure 2: NOAA Southern priority areas (red box) with GEBCO 2019 bathymetry. Survey line plan (yellow). ....	6
Figure 3: EM 124 Southern Priority area survey extinction plots (top on left, bottom on right). ....	7
Figure 4: NOAA Southern Priority areas uncertainty at 95% confidence - red indicating areas of higher uncertainty. ....	10
Figure 5: Southern Priority area uncertainty data (purple) in comparison with the IHO Order specifications (yellow dotted lines). This figure proves these data meet the limitations set forth by the Order 1 survey classification for the top dataset and Special Order for the bottom dataset. ....	11
Figure 6: Difference grid between GEBCO 2019 grid and the EM 124 data. Positive values are where EM 124 is deeper than GEBCO (green) and negative values indicate where the EM 124 reads shallower than GEBCO (red). ....	12
Figure 7: GEBCO data sources. Grey represents areas that were interpolated, and blue and light blue are previously collected bathymetry data. The black outlines are the NOAA southern priority areas where EM 124 data were collected. ....	13
Figure 8: Two XBTs collected in the survey area (blue) in comparison to World Ocean Atlas modeled data (dashed pink lines).....	14
Figure 9: Two patch test plans in the Mediterranean Sea – shallow one was performed off southern Italy over a submarine channel, and the deep one was performed two days later near Calypso Deep off western Greece. ....	15
Figure 10: Deep patch test results for pitch and roll using Qimera’s patch test toolbox. ....	16
Figure 11: NOAA Southern priority area backscatter mosaic at 100m resolution. ....	17



## List of Tables

Table 1: Survey Limits .....	5
Table 2: Survey Statistics .....	8
Table 3: Julian Day, survey dates .....	8
Table 4: Vessel Used .....	8
Table 5: Systems used during data acquisition .....	8
Table 6: Uncertainties associated with processing and sound velocity measurements. ....	9
Table 7: Processing software. *personal license.....	18
Table 8: Final mission surfaces.....	18



## 0.0 Survey Information

### 0.1 Survey Limits

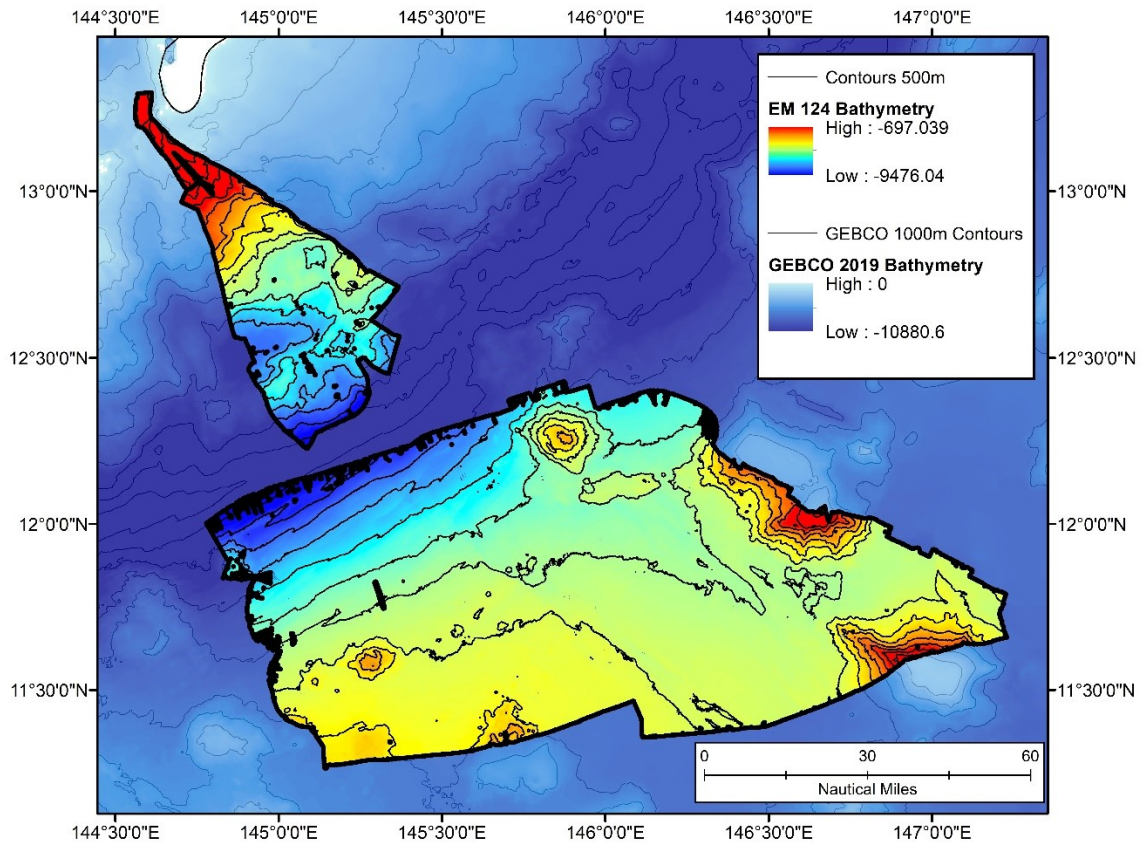


Figure 1: Bathymetry collected within the Southern Mariana Trench NOAA priority areas collected with the Kongsberg EM 124 over GEBCO 2019 estimated bathymetry.

The NOAA Southern priority areas (Figure 1) were surveyed with a Kongsberg EM 124 gondola-mounted to the hull of the 225-foot DSSV Pressure Drop. The surveys were conducted over the course of ten days – May 4-6, 2020 and May 26-31, 2020. These data meet (at least) the requirements for IHO Order 1 standards.

The NOAA southern priority survey is within the following limits:

Northwest Limit	Southeast Limit
13°17'45.803"N	11°15'40.799"N
144°33'23.071"E	147°14'25.925"E

Table 1: Survey Limits



## 0.2 Survey Purpose

In a new partnership with NOAA (the National Oceanographic and Atmospheric Administration), Caladan Oceanic LLC has agreed to map their priority areas within the Northern Mariana Trench region. These priorities were specifically identified within the National Marine Monument and Sanctuary as areas that have little to no prior coverage and within the unique capabilities of the onboard EM 124. The priorities are grouped for ease of reporting by geographic locations – Northern, Middle, and Southern regions. It is anticipated that these data will help the greater scientific understanding of the area and contribute to the international effort to create a complete high-resolution map of the oceans (i.e. GEBCO’s Seabed 2030).

## 0.3 Survey Plans

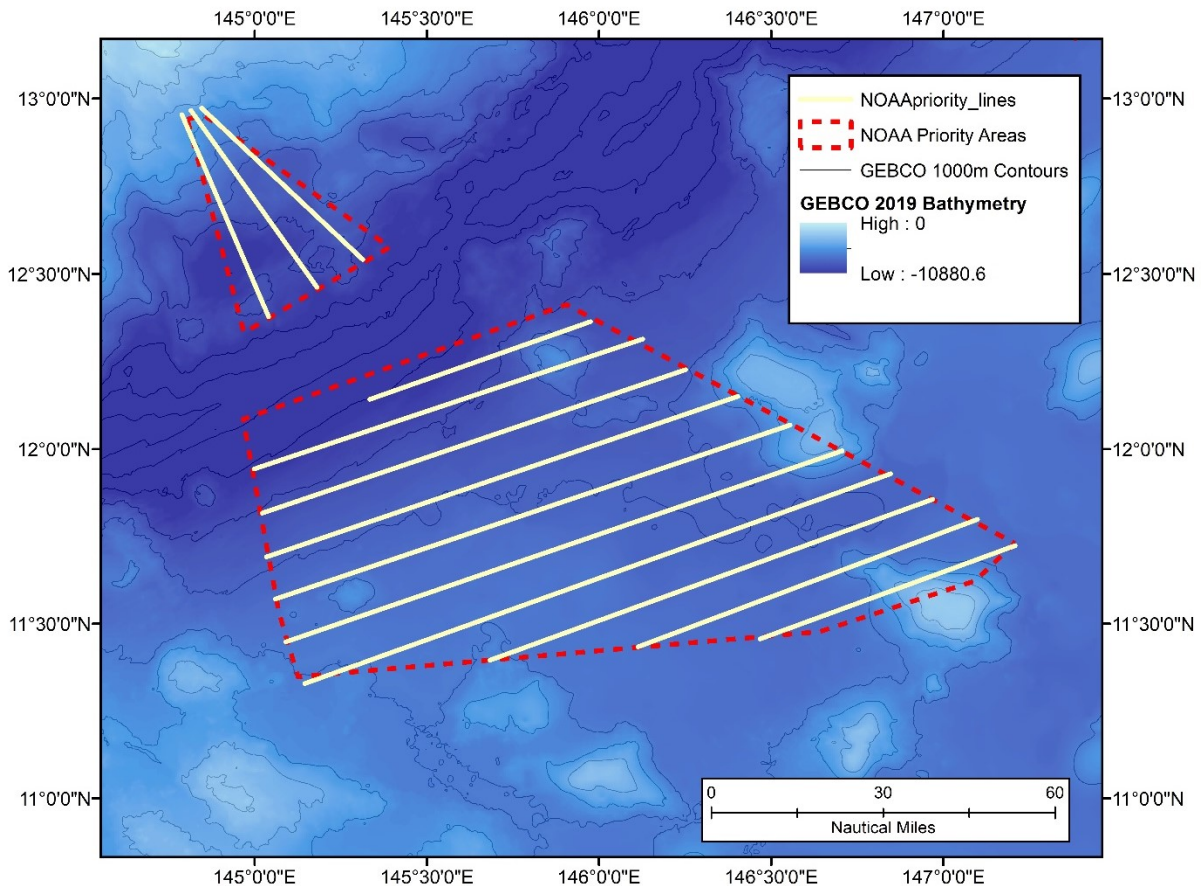


Figure 2: NOAA Southern priority areas (red box) with GEBCO 2019 bathymetry. Survey line plan (yellow).

The final mapping plan is depicted in Figure 2. It took over six days to complete at 10 kts.



### 0.4 Survey Quality

These data meet at least IHO Order 1 specifications and should supersede any prior data for all intents and purposes.

### 0.5 Survey Coverage

No notable holidays (or gaps in coverage) were created during this survey, only slight fanning occurred during changes in heading.

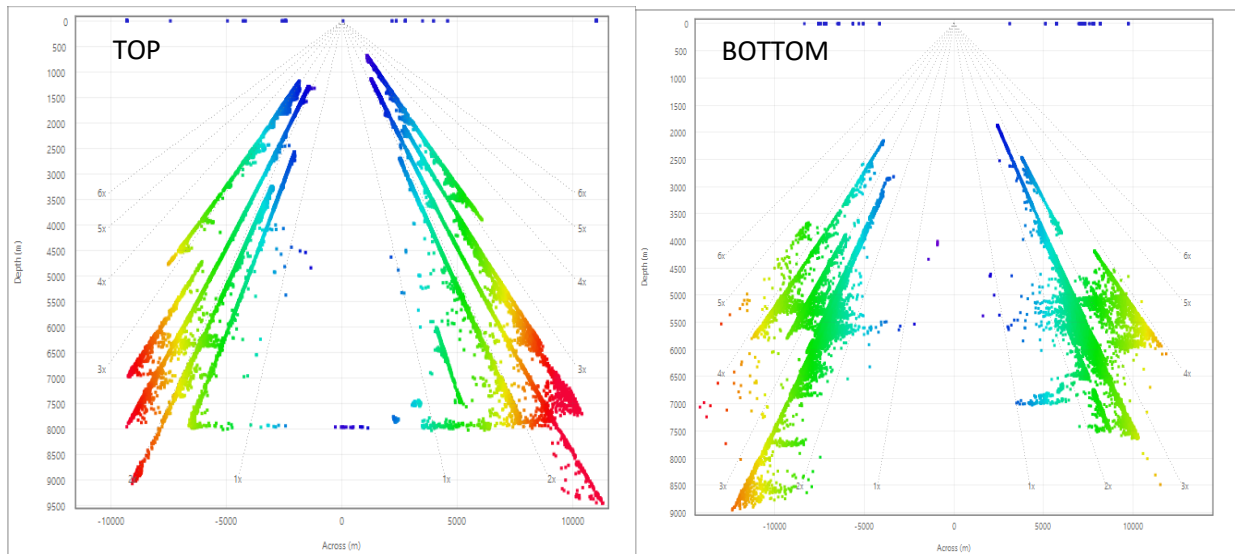


Figure 3: EM 124 Southern Priority area survey extinction plots (top on left, bottom on right).

Throughout the area, we achieved swath widths around 18 km with 45-60° coverage on either side of nadir ~ 2.5x water depth (Figure 3). During the sonar installation, Kongsberg technicians determined that the DSSV Pressure Drop inherently produces 65-70 dB of noise which can contribute to the smaller swath widths.

### 0.6 Survey Statistics

The following tables lists the survey mileage for this survey:

	Vessel	Total (km)
	SBES Mainscheme	0



Line Type	MBES Mainscheme	1,675
	SBES/MBES Combo	0
	MBES Crosslines	0
Number of Bottom Samples		0
Survey Area (KM <sup>2</sup> )		25,044

Table 2: Survey Statistics

The following table lists the specific dates of data acquisition for this survey:

Date	Julian Day
05-04-2020	131
05-25-2020	152

Table 3: Julian Day, survey dates

Survey lines were run with a 12 kHz multibeam echosounder. Statistics were calculated in ESRI ArcGIS 10.6.1 (*personal license*).

## 1. Data Acquisition and Processing

### 1.1 Equipment and Vessel

Refer to the Data Acquisition and Processing Report (DAPR) for a complete description of data acquisition and processing systems, survey vessels, quality controls, and processing methods. Additional information will be discussed in the following sections.

The following vessels were used for data acquisition during this survey:

Vessel	DSSV Pressure Drop
LOA	72.6 meters
Draft	4.18 meters

Table 4: Vessel Used

The following systems were used for data acquisition during this survey:

Manufacturer	Model	Purpose
Kongsberg	EM 124	Multibeam Echosounder (MBES)
Kongsberg	Seapath 380+	Positioning and Attitude System
Reson	SVP70	Fixed Mount Sound Speed

Table 5: Systems used during data acquisition

The DSSV Pressure Drop single beam echosounder (SBES) was turned off during data acquisition as interference becomes visible in the MBES due to the frequency of the two signals.





## 1.2 Uncertainty

Total propagated uncertainty values were derived from fixed values with instrumental detailed in the DAPR, vessel characteristics, and uncertainty associated with the sound speed measurement and data processing (Table 6). The Seabird SBE49 derived full-ocean depth sound velocity from temperature and conductivity sensors while surface sound speed was determined by the Reson SVP70.

MANUFACTURER	SOURCE	CONTRIBUTION
<b>QIMERA</b>	Roll & Pitch	0.02°
	Heading	0.075°
	Heave Fixed	0.05m
	Heave Variable	5%
	Roll Offset	0.05°
	Pitch Offset	0.05°
	Heading Offset	0.05°
<b>SEABIRD</b>	Conductivity Accuracy	± 0.0003 S/m
	Temperature Accuracy	± 0.002 °C
	Pressure Accuracy	± 0.1% of full-scale range
<b>RESON SVP70</b>	Sound Velocity Accuracy	0.05 m/s
	Sampling Time	50 ms to 10s

Table 6: Uncertainties associated with processing and sound velocity measurements.

For Order 1 surveys, the maximum allowable horizontal uncertainty is 5 m at 95% confidence while the maximum allowable vertical uncertainty is  $\pm\sqrt{(0.25)^2 + (0.0075 \times d)^2}$  of a given depth (d) at 95% confidence. The NOAA southern priority survey areas have a depth range between 697 – 9,476 m. With these values, the range of allowable TPU is ± 5.2 – 71 m at 95% confidence.

TPU statistics were generated for the Qimera CUBE uncertainty surface in the ESRI ArcGIS.

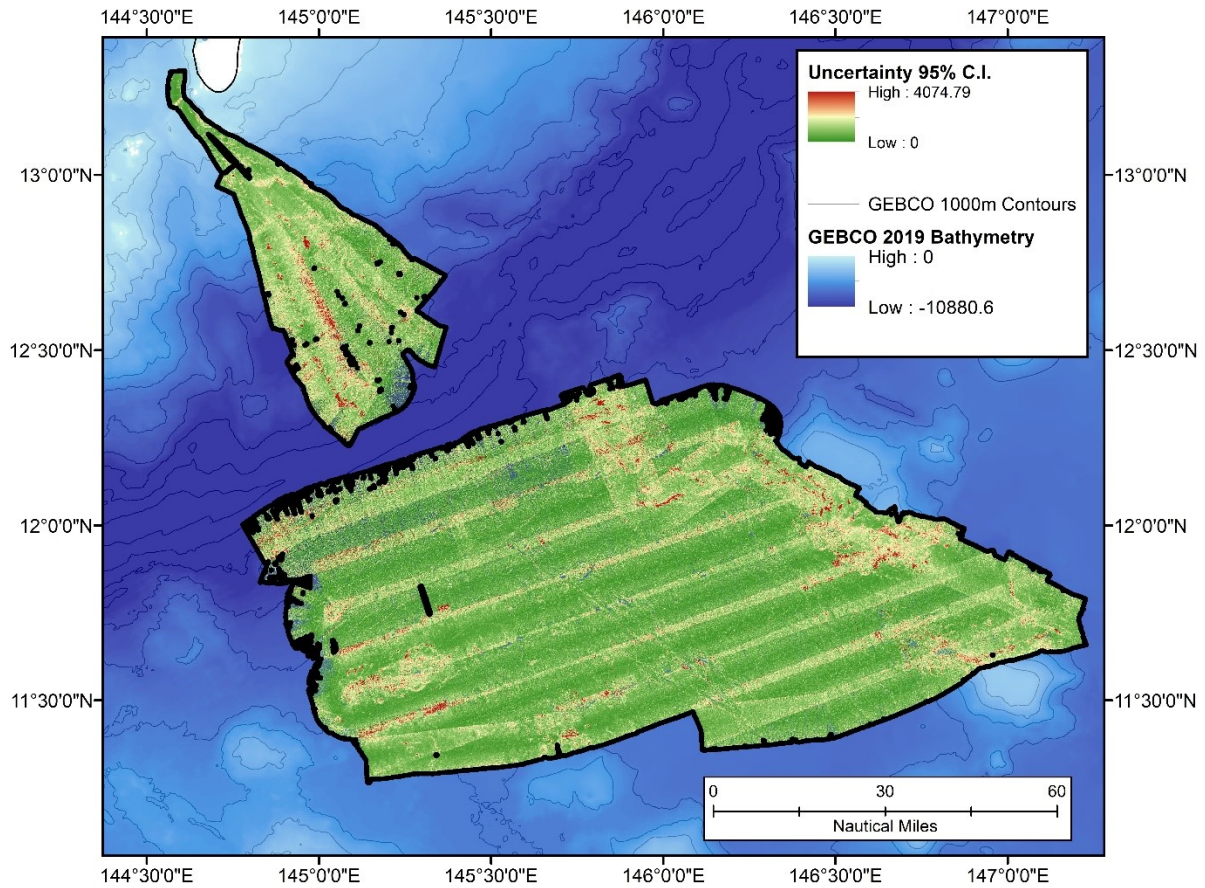


Figure 4: NOAA Southern Priority areas uncertainty at 95% confidence - red indicating areas of higher uncertainty.

Figure 4 shows that uncertainty surface mapped to a color range with a minimum of 0. The average estimated uncertainty of the southern priority survey areas is 14.7 m. This exceeds the lowest bound of the maximum uncertainty for these data; however, this does not accurately reflect the bulk of the data. The average depth of these data is ~5,960 m which corresponds to a maximum uncertainty of 45 m, of which our estimates are much lower.

These data meet at least IHO Order 1 specifications as shown in Figure 5.

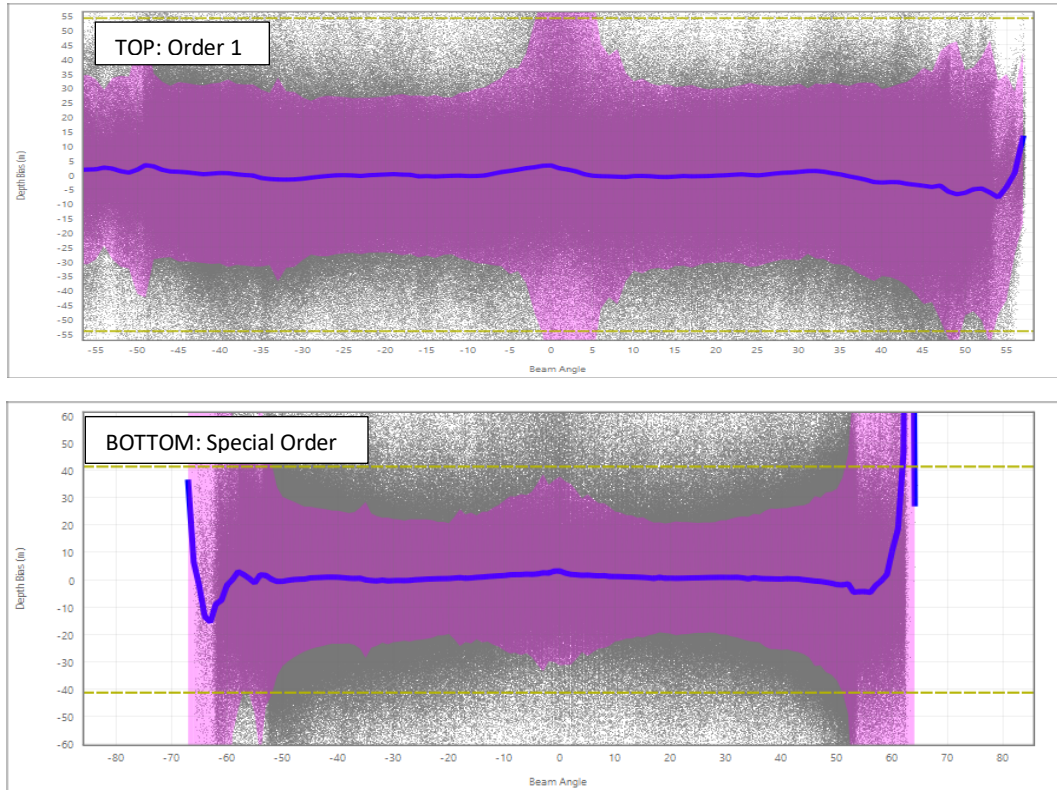


Figure 5: Southern Priority area uncertainty data (purple) in comparison with the IHO Order specifications (yellow dotted lines). This figure proves these data meet the limitations set forth by the Order 1 survey classification for the top dataset and Special Order for the bottom dataset.

### 1.3 Junctioning Surveys

#### 1.3.1 GEBCO 2019 Comparison

General Bathymetric Chart of the Ocean (GEBCO) is an international effort funded by the Nippon Foundation that focuses on maps of the ocean. The GEBCO 2019 world ocean grid is the widely used standard of known bathymetric information and vertically referenced to mean sea level (MSL). The portion of the data covering the NOAA southern priority survey areas were extracted from the GEBCO website and used as a base-layer map to help with line-planning ([https://www.gebco.net/data\\_and\\_products/gridded\\_bathymetry\\_data/](https://www.gebco.net/data_and_products/gridded_bathymetry_data/)). This surface was differenced with the EM 124 NOAA southern priority survey data in ESRI ArcGIS.

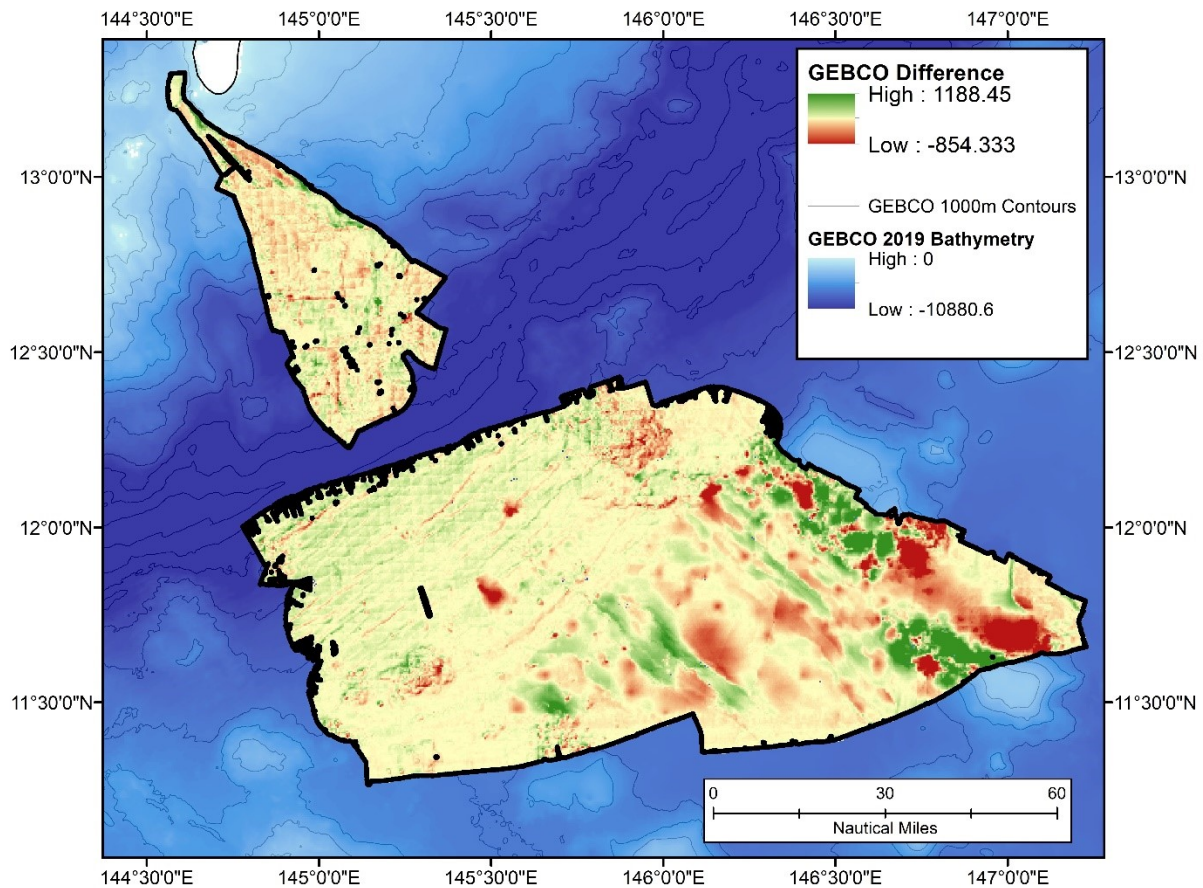


Figure 6: Difference grid between GEBCO 2019 grid and the EM 124 data. Positive values are where EM 124 is deeper than GEBCO (green) and negative values indicate where the EM 124 reads shallower than GEBCO (red).

The average difference between the two grids is 5 m with the EM 124 being shallower. The GEBCO 2019 grid has a resolution of ~600 m which is of lower quality in comparison to the 100 m NOAA southern priority surveys. This resolution discrepancy likely contributes to some of the difference values seen in Figure 6.

### 1.3.2 Summary

According to the GEBCO 2019 grid sources available at the time of survey, ~47% of the area we covered was interpolated from satellite estimates, meaning 53% of the area has been mapped before (Figure 7).

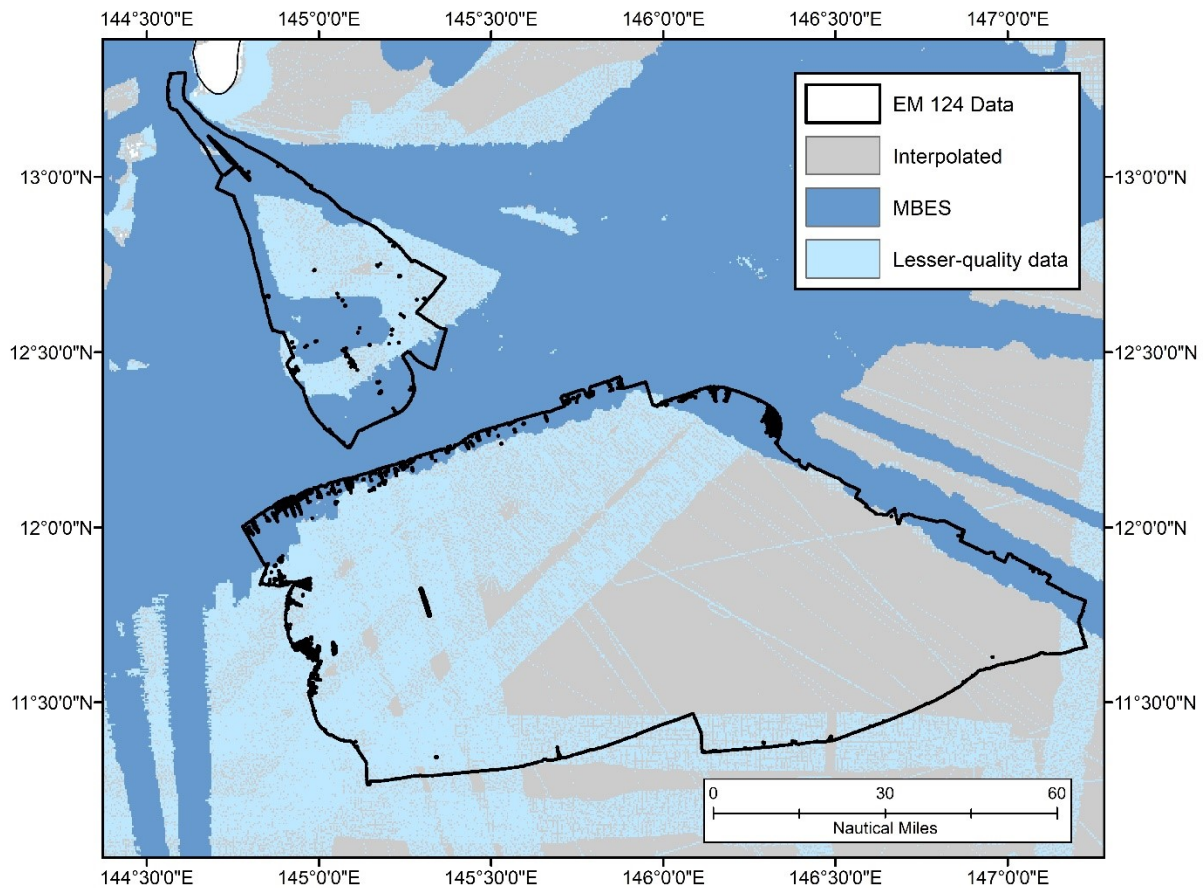


Figure 7: GEBCO data sources. Grey represents areas that were interpolated, and blue and light blue are previously collected bathymetry data. The black outlines are the NOAA southern priority areas where EM 124 data were collected.

Our efforts were the first to map the NOAA southern priority areas in their entirety. It is anticipated that these data will be a fundamental contribution to the scientific community.

#### 1.4 Sound Speed

Two XBTs were deployed throughout the survey and applied to the data. These were combined with World Ocean Atlas 2009 (WOA) salinity data to accurately calculate sound velocity (Figure 8). The profile is accurate to ~1500m and was extended to full-ocean depth using WOA values. As the upper portion of the water column is the most dynamic and influenced constantly by outside sources (wind, waves, sun, biological movements, etc.), it is the most important to sample.

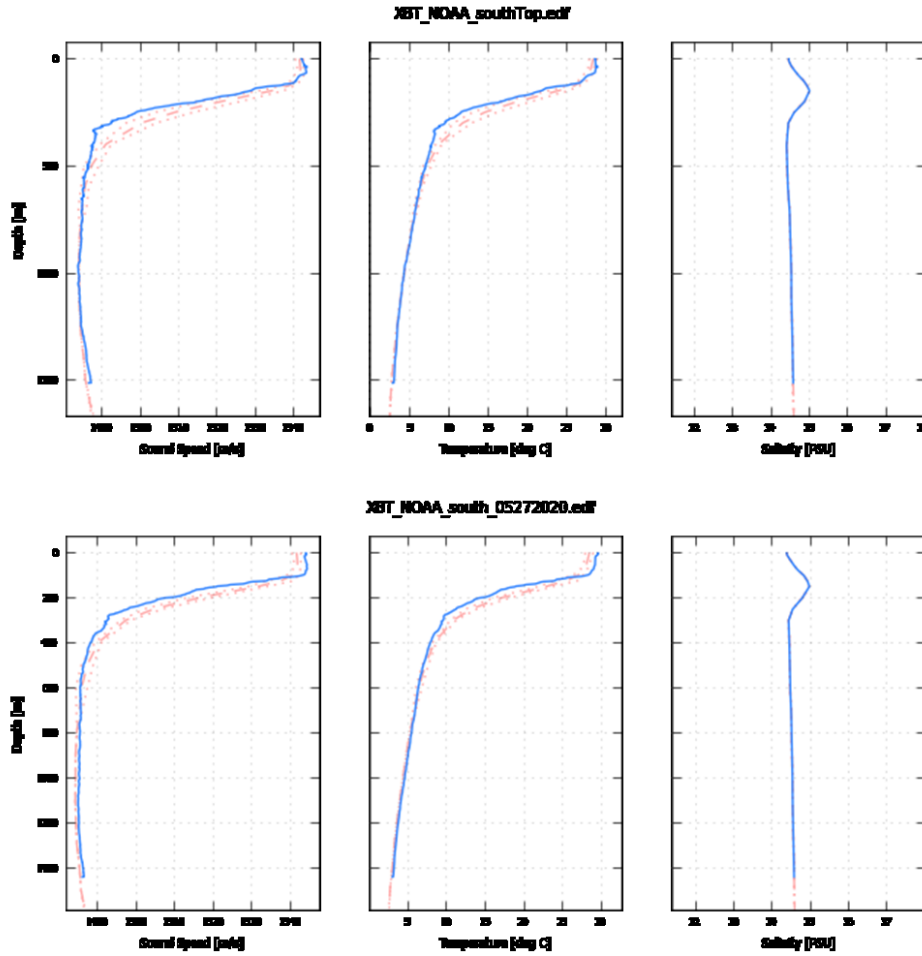


Figure 8: Two XBTs collected in the survey area (blue) in comparison to World Ocean Atlas modeled data (dashed pink lines).


## 1.5 Data Corrections

No data corrections were required during this survey.

## 1.6 Calibrations

### 1.6.1 Patch Test

Two sets of patch tests were performed by Cassie Bongiovanni in early February at the beginning of the 2020 DSSV *Pressure Drop* field season - one in shallow water (500-700 m) and one in deep water (> 2500 m). More detailed information is outlined in the Patch Test Report.

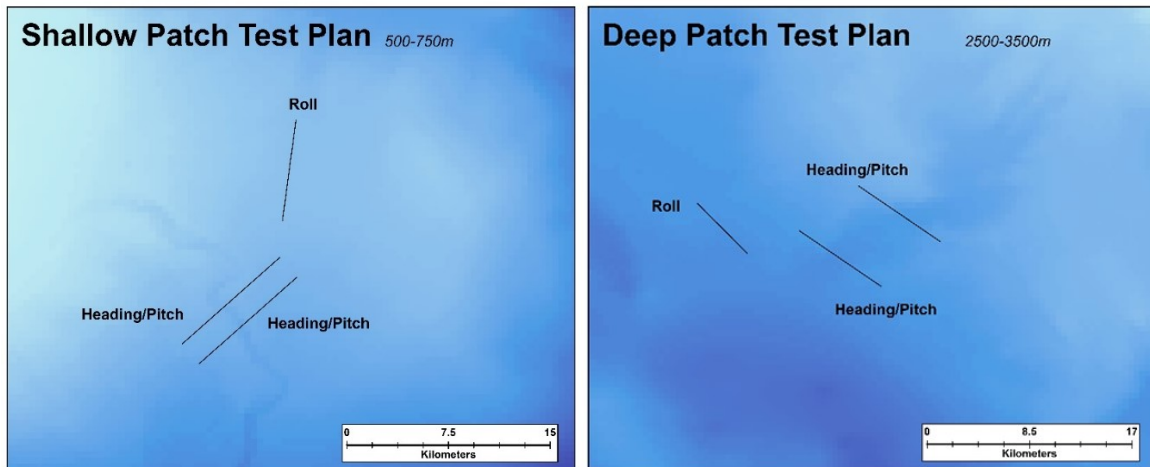

*Figure 9: Two patch test plans in the Mediterranean Sea – shallow one was performed off southern Italy over a submarine channel, and the deep one was performed two days later near Calypso Deep off western Greece.*

The shallow water lines were run first and then used to determine the offsets applied to the deep lines during collection. The deep patch was performed to make sure that the offsets remained true. In addition to the standard Qimera offset analysis, a secondary verification was performed called “the Over-Under” analysis. The concept behind the over-under approach is to rely on the depth difference between each pair of survey lines to indicate what needs to be recalibrated and by how much. In theory, our eyes will be able to pick up on smaller details that computer systems can’t.


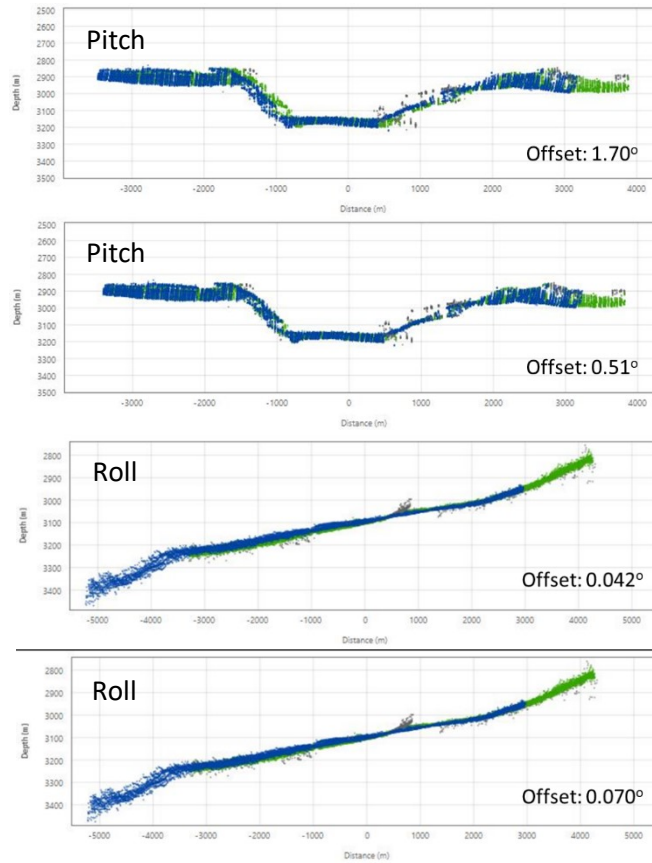


Figure 10: Deep patch test results for pitch and roll using Qimera's patch test toolbox.

Ultimately, the results from the deep patch test will be the final offsets as the system primarily operates in deep water. It is believed that they represent a more realistic estimate of the true system offsets resulting from their amplification in deep water in addition to a calmer weather day during the deep patch collection.



It was also determined later (using the Qimera wobble toolbox) that a latency offset of 0.163 seconds needed to be applied to all data.

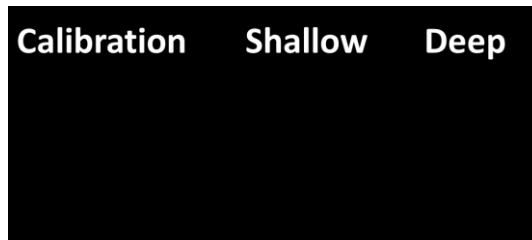



### 1.6.2 Backscatter Calibration

A backscatter calibration was performed in December of 2018 during the sonar acceptance test (SAT). This was accomplished by running short lines (< 1 nm) in all depth modes (Shallow, Medium, Deep, Deeper, and Very Deep) in two directions – East to West, and West to East.

In February of 2020, the backscatter calibration file was updated to match the file format accepted in the newest version of SIS 5; however, no other calibration details were applied during this process.

### 1.7 Backscatter

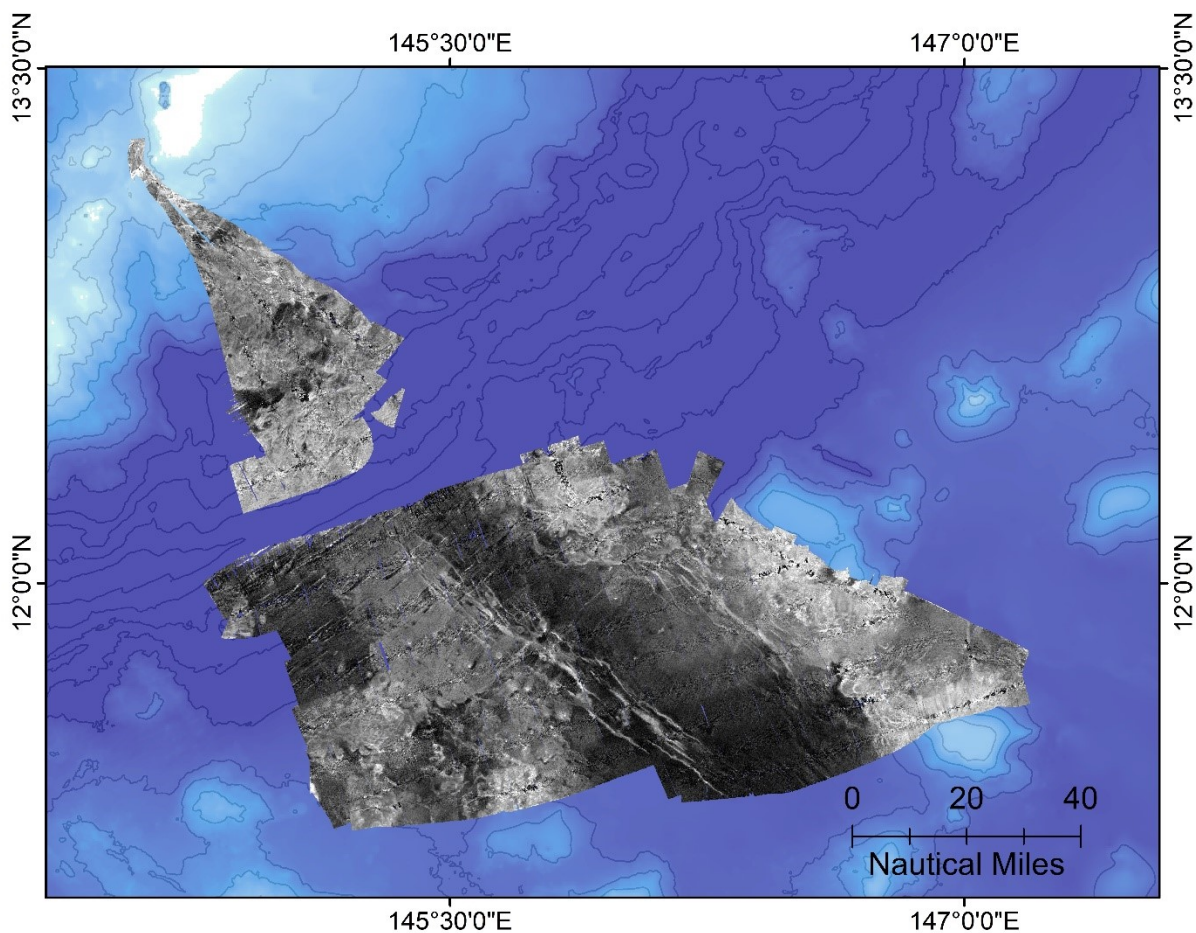


Figure 11: NOAA Southern priority area backscatter mosaic at 100m resolution.

Backscatter data were collected from the EM 124 during bathymetric data collection. No sediment samples were taken for verification.



## 1.8 Processing Software

Name	Manufacturer	Version	Installation Date
Qimera	QPS	1.7.5	12/04/2018
Hydro Office Sound Speed Manager	UNH CCOM/ Hydro Office	2018.1.50	12/06/2018
Matlab*	Matlab	R2018a	09/18/2018
Fledermaus & FMGT	QPS	7.8	12/04/2018
ArcMap/ArcGIS*	ESRI	10.7.1	09/18/2018

Table 7: Processing software. \*personal license

More detailed information on processing software is outlined in the DAPR.

## 1.9 Surfaces

The following surfaces and/or BAGs are submitted with these reports:

Surface Name	Surface Type	Resolution	Depth Range
NOAA_South_CUBE_100m.xyz	CUBE	100 m	-697 m to -9,476 m
NOAA_South_95Uncertainty.tiff	Uncertainty	120 m	N/A
NOAA_South_Surface_100m.bag	Surface	100 m	-697 m to -9,476 m
NOAA_South_Backscatter_100.tiff	Backscatter	100 m	N/A

Table 8: Final mission surfaces.

## 2. Vertical and Horizontal Control

### 2.1 Vertical Control

All data are referenced to the geoid (MSL). No further vertical corrections were applied.

### 2.2 Horizontal Control

No horizontal corrections were applied.