

U.S. DEPARTMENT OF COMMERCE  
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  
NATIONAL OCEAN SERVICE

## DATA ACQUISITION AND PROCESSING REPORT

*Type of Survey:* Navigable Area

*Time Frame:* 2004 Field Season

2004

**CHIEF OF PARTY**

**LT Todd A. Haupt, NOAA**

**LIBRARY & ARCHIVES**

**DATE:** \_\_\_\_\_

**APPENDIX I**

**Data Acquisition Equipment Summary Table**

**Data Acquisition and Processing Software Summary Table**

**Summary Table of Data Acquisition Equipment**

<b>Equipment Description</b>	<b>Serial Number</b>	<b>Dates Used</b>
RUDE		
Reson SeaBat 8125 SWMB	31562	all
Odom Echotrac Mk II VBES	9812	all
KLEIN 5500 Towfish	278	all
KLEIN TPU Series 5105	138	all
POS/MV 320	219	all
Inertial Measurement Unit (IMU)	047	all
Trimble DSM-212L DGPS Receiver	0220227632	all
Magnavox MX-50 Beacon Receiver	079	all
Seabird Seacat SBE-19 CTD	284	all
	1991	all
Odom Digibar Pro SV Sensor	98013	all
Yokogawa CMZ700S Gyrocompass	0202	all
Launch 1419		
<b>Reson Seabat 8124 SWMB</b>	UNK	Fall 2003
Odom Echotrac Mk II VBES	9641	all
KLEIN 3000 Towfish	408	all
KLEIN TPU Series 3100	408	all
Starlink DNAV-212 DGPS Receiver	850	all
TSS Dynamic Motion Sensor DMS05	0022068	all
Meridian Surveyor Gyrocompass	2279	all



**APPENDIX I**

**Data Acquisition Equipment Summary Table**

**Data Acquisition and Processing Software Summary Table**

**Summary Table of Data Acquisition Equipment**

<b>Equipment Description</b>	<b>Serial Number</b>	<b>Dates Used</b>
RUDE		
Reson SeaBat 8125 SWMB	31562	all
Odom Echotrac Mk II VBES	9812	all
KLEIN 5500 Towfish	278	all
KLEIN TPU Series 5105	138	all
POS/MV 320	219	all
Inertial Measurement Unit (IMU)	047	all
Trimble DSM-212L DGPS Receiver	0220227632	all
Magnavox MX-50 Beacon Receiver	079	all
Seabird Seacat SBE-19 CTD	284	all
	1991	all
Odom Digibar Pro SV Sensor	98013	all
Yokogawa CMZ700S Gyrocompass	0202	all
Launch 1419		
<b>Reson Seabat 8124 SWMB</b>	UNK	Fall 2003
Odom Echotrac Mk II VBES	9641	all
KLEIN 3000 Towfish	408	all
KLEIN TPU Series 3100	408	all
Starlink DNAV-212 DGPS Receiver	850	all
TSS Dynamic Motion Sensor DMS05	0022068	all
Meridian Surveyor Gyrocompass	2279	all



## **Data Acquisition and Processing Report to Accompany 2004 Hydrographic Surveys**

### **NOAA Ship RUDE (s590) LT Todd A. Haupt, NOAA, Commanding**

#### **A. EQUIPMENT**

##### **A.1 Platforms**

All data are acquired from NOAA Ship RUDE (s590, EDP #9040) and NOAA Survey Launch 1419. RUDE and 1419 are equipped with multi-beam, vertical beam echosounders, and side scan sonar. RUDE is a Class V Hydrographic Survey Ship, 90 feet in length overall, with a 22-foot beam and 7-foot draft. Launch 1419 is a 23-foot SeaArk aluminum launch, with an 8.5 foot beam, and 1.5 foot draft. Refer to Appendix III for more detailed vessel descriptions and equipment positioning diagrams.

##### **A.2 Sounding Instruments**

###### Vertical Beam Echo Sounder

RUDE and Launch 1419 are equipped with Odom Echotrac DF3200 MKII Dual Frequency Vertical-Beam Echosounders (VBES) configured for 24 and 200 kHz operation. Both frequencies are digitized and recorded at 5 Hz. Actual ping rates are dependent on the depth of water. Aboard RUDE, the VBES provides soundings during side scan sonar acquisition and quality control for the ship's multi-beam echosounder system (see below). VBES also provides bathymetry during side scan sonar operations on Launch 1419; however, the high frequency VBES and the multi-beam echosounder system on 1419 operate at the same sonic frequency. Therefore, during Launch multi-beam acquisition, only the low frequency VBES transducer is used and logged.

On each platform, VBES data is logged by the Hypack software package (see section A.5 below), but paper records are acquired and retained for comparison with digitized depths during processing whenever the VBES is the primary sounding instrument.

The VBES data are acquired in conjunction with side scan sonar or multi-beam echo sounder acquisition. Side Scan Sonar line spacing is dictated by the acquisition requirements of the survey. Multibeam echosounder data are acquired during shoal developments with a typical line spacing of 10 meters.

###### Shallow Water Multi-Beam Echosounder

RUDE is equipped with a RESON Seabat 8125 Shallow Water Multi-Beam Sonar System (SWMB). The SWMB is a 455 kHz multi-beam sonar is efficient



for water depths of 60 meters or less. For depths greater than 60 meters, the swath width decreases significantly as the depths increase. The 8125 utilizes an integrated transmit/receive head, which is pole mounted on the port side of the vessel. The 8125 projects a single transmit pulse and listens for the return echo using beam forming. There 240 beams, each  $0.5^\circ$  (across track) by  $1.0^\circ$  (along track). The 8125 is capable of ping rates from 3.02 Hz to 40.05 Hz, depending on range scale. However, to avoid extraneous amounts of sound in shallow water areas, the maximum ping rate is set to 20 Hz. The 8125 transmit power level and Time Varied Gain (TVG) receiver gain controls are adjusted to minimize returns from water column clutter and surface reflection. The 8125 Depth filters are adjusted to remove aberrant shallow and deep returns during acquisition. During SWMB data acquisition, the ship is operated at speeds resulting in a minimum of 3.2 pings / 3 meters along track bottom coverage. The 8125 generates digital sounding data and backscatter that is logged by the ISIS software package (see section A.5 below).

Launch 1419 is equipped with a RESON Seabat 8124 Shallow Water Multi-Beam System (SWMB). The SWMB operates at a frequency of 200 KHZ and is designed for water depths of up to 650 m. The RESON Seabat 8124 is pole mounted on the port side of the launch. The 8124 transducer transmits a single pulse and receives using 80 beams. Each beam is  $1.5^\circ$  in the along track direction and  $1.5^\circ$  in the across track direction. The 8124 is capable of ping rates from 0.95 Hz to 39.89 Hz, depending on range scale. However, to avoid extraneous sound in shallow water areas, the maximum ping rate is set at 20 Hz. The 8124 transmit power level and Time Varied Gain (TVG) receiver gain controls are adjusted to minimize returns from water column clutter and surface reflection. The 8124 Depth filters are adjusted to remove aberrant shallow and deep returns during acquisition. During SWMB data acquisition, the ship is operated at speeds resulting in a minimum of 3.2 pings / 3 meters along track bottom coverage. The 8124 generates digital sounding data and backscatter that is logged by the ISIS software package (see section A.5 below).

A reference surface test was conducted in summer 2004 to assess the precision of the SWMB system. This test showed that under the prevailing conditions at that time and location, RUDE's sonar systems exceeded the International Hydrographic Organization "Special Order" specification. See the report attached in Appendix V for complete results. During data acquisition SWMB outer beams, and VBES or Nadir beams are continuously compared using the ISIS "Bathymetry Confidence" utility.

To achieve 100% MultiBeam Echosounder (MBES) coverage, lines are run parallel to bottom contours at spacing of approximately  $2\frac{1}{2}$  times the water depth. After initial acquisition, coverage plots are generated and reviewed using digital terrain model from gridded data at a resolution of no more than 5 meters, and additional lines are planned to fill any gaps.

### Side Scan Sonar

RUDE and Launch 1419 carry a Klein 5500 High Speed High Resolution Side Scan Sonar (HSHRSSH) towfish and a Klein 3000 dual frequency towfish, respectively. Klein side-scan sonar data from both platforms are recorded digitally from the Transceiver and Processing Unit (TPU) using the ISIS software and archived in the Extended Triton Format (\*.XTF) files (see section A.5). The Klein 5500 towfish transmits at 455 kHz. The Klein 3000 towfish transmits at 100 kHz and 500 kHz.

RUDE's ship wake turbulence limits SSS acquisition by RUDE to depths greater than approximately 8 meters. SSS from Launch 1419 is similarly limited to depths greater than roughly 4 meters.

Side scan sonar lines are planned to run parallel to bottom contours, spaced in accordance with the Side Scan Sonar Manual. Lines are planned with at least 15m of overlap with adjacent swaths on either side. Range scales are determined primarily by water depth.

Vessel speed is adjusted to ensure that an object one meter in characteristic size would be detected and clearly imaged across the sonar swath. Confidence checks are performed and noted frequently to ensure this standard of resolution is met.

### Lead Line

A lead line was used to confirm the calibration of RUDE's VBES and SWMB systems on 16 July 2004. This test showed that under the conditions at the time of the calibration, RUDE's sonar systems exceed the IHO "Special Order" specification. See the report attached in Appendix V for complete results.

### Diver Least Depth Gauge

RUDE divers were equipped with a diver least depth gauge for item investigations. The calibration report is included in Appendix V. The accuracy of RUDE's diver least depth gauge was also assessed as part of the Lead Line comparison test mentioned above.

## **A.3 Positioning and Attitude Instruments**

### **RUDE**

#### POS/MV 320

RUDE's primary positioning and attitude sensor is a POS/MV Model 320 Ver. 3. This system combines data from an inertial attitude sensor and carrier-phase GPS receivers to compute position, heading, heave, pitch, and roll to the accuracy required for shallow water multibeam sonar surveys. The three major

components of the POS/MV are: an Inertial Measurement Unit (IMU) mounted at the ship's center of motion; two GPS antennas on the ship's mast mounted perpendicular to the line of the ship; and a Pos Computer System (PCS) processing unit on the bridge.

Differential GPS corrector input from an external source is required. These correctors are brought in with GPS data from the Trimble GPS system. A GPS receiver is directly connected to the POS/MV processor computer. RUDE's position and heading is calculated by measuring the phase difference of the GPS signals arriving at the two antennas and computing the vector between them. The resulting GPS position is corrected for the lever arm from the antennas to the center of motion. The GPS heading data and linear and angular acceleration values from the IMU are processed through Kalman filtering. This filter is designed to produce output that reflects high frequency changes in vessel position and attitude as measured by the IMU while constraining the drift of this sensor with the long-term stability of GPS.

Heave is computed by double integration of acceleration in the vertical axis as measured by the IMU. Since this measurement is subject to long term drift, the data are high pass filtered with a rolloff frequency and damping coefficient selected to stabilize the measurement while preserving the phase and amplitude of the ship's vertical position in sea states anticipated in RUDE's area of operations.

All data are corrected to the position of the IMU. The final position, heave, and attitude data are output to the Hypack and Isis data acquisition systems via RS-232 serial and Ethernet connections. This correction data is stored within the Hypack and Isis output data files. The POS/MV system is configured for 20 Hz output of the "TSS" Heave / Roll / Pitch message and 5 Hz output of the NMEA-0183 GGA and HDT messages. (See POS/MV settings Appendix II).

#### Trimble DSM-212L

RUDE's auxiliary positioning system is a Trimble DSM-212L DGPS receiver. The DSM-212L is an integrated unit combining a 12 channel L1 C/A code receiver with a 2 channel Differential Beacon receiver. This unit is used primarily to receive USCG Differential Beacon messages, which are passed with GPS data to the POS/MV auxiliary input. Although the DSM-212L has the ability to automatically select stations based on signal strength or geographic proximity, the receiver is manually tuned to avoid unexpected and undocumented changes in the differential beacon in use.

Position, time, and velocity data from the Trimble is available in a 1 Hz NMEA message as an auxiliary input to the POS/MV. The DSM-212L is configured using the "TSIP Talker" software to suspend output in the event NOS Hydrographic Position Control specifications are not met.

### Northstar 952X

RUDE also carries a Northstar 952X DGPS positioning system. The system is capable of accepting either USCG Differential Beacon messages or Wide Area Augmentation System (WAAS) messages. This unit is not currently used for survey acquisition, but serves as a back-up navigation system.

### Yokogawa CMZ700S Gyrocompass

RUDE is equipped with a Yokogawa CMZ700S gyrocompass. This instrument serves primarily as a heading reference for navigation.

## **LAUNCH 1419**

### Starlink DNAV-212

Launch 1419 is equipped with primary and backup Starlink DNAV-212 DGPS receivers, which provide position, timing, velocity, and course. The Starlink is an integrated 12 Channel L1 C/A code and 2 Channel Differential Beacon receiver. The Starlink receivers are configured with the “Starinit” software to suspend output in the event NOS Hydrographic Position Control specifications are not met, and manually tune the differential beacon receiver to the desired frequency. The Starlink receivers produce the NMEA-0183 GGA and VTG messages at 1 Hz.

### S.G. Brown Meridian Surveyor Gyrocompass

Launch 1419 is equipped with an S.G. Brown Meridian Surveyor gyrocompass. This instrument serves as a heading reference for navigation and its output is fed to the hydrographic survey systems as well. The Meridian Surveyor is configured to deliver the NMEA-0183 HDT message at 10 Hz.

### Heave and Attitude

Launch 1419’s primary positioning and attitude sensor is a TSS Dynamic Motion Sensor DMS05. This system combines data from an inertial attitude sensor and carrier-phase GPS receivers to compute position, heading, heave, pitch, and roll to the accuracy required for shallow water vertical beam sonar surveys. The major component of the DMS05 is a Linear Accelerometer Array mounted amidships on the boat’s port side.

GPS speed and vessel track information from the DNAV-212 GPS receiver is utilized by the DMS05 for calculations during vessel turns. The GPS speed is used in the calculation to determine the value for centripetal acceleration. The GPS vessel track information provides a reference for the vertical rate sensors to eliminate the affects of drift or accumulative errors in the measurement of the

rate of turn ( $\omega$ ) and allows a more accurate assessment of the magnitude of centripetal acceleration. The GPS input becomes ineffective if the vessel speed falls below 1 meter/sec.

Heave is computed by double integration of the output from the linear accelerometer array. A filtering action takes place after each integration to limit the low frequency response of the system and to allow recovery from the erroneous effects of random noise and horizontal acceleration. A bandwidth period of 12 seconds was chosen to optimize the phase and amplitude of the vessel's vertical position to sea states anticipated in Launch 1419's area of operations.

The final heading, position, heave, and attitude data are output to the Hypack data acquisition system via RS-232 serial. The SonarPro system receives GPS information only.

#### **A.4 Ancillary Instruments**

##### Sound Velocity

Conductivity, temperature, and depth profiles are acquired using two Seabird Seacat SBE-19 Conductivity, Temperature, and Depth (CTD) profilers. The SBE-19 is a self-contained, battery-powered unit with a serial interface for configuration and data download. RUDE's SBE-19's are equipped with a 300 psi pressure gauge to provide high resolution data in the relatively shallow water typical of RUDE's areas of operations. Sound velocity files in CARIS format are computed using the "Velociwin" software described in section A.5.

During MBES data acquisition, CTD casts are conducted when starting work in an area and every 4 hours thereafter, or when the surface sound velocity is observed to have drifted outside accepted limits as discussed below. For VBES data, casts are conducted weekly or when survey personnel suspect a significant change in the properties of the water column. The calibration records are included in the Appendix V.

Surface sound velocity is continuously monitored during multi-beam acquisition with an Odom Hydrographic Digibar Pro sound velocimeter. The velocimeter is mounted just above the multi-beam transducer head. During MBES data acquisition, a new CTD cast is taken if the surface sound velocity is observed to have changed more than +/-5 m/s from its value at the last CTD cast. The calibration records for this instrument are included in Appendix V.

Comparisons between the two CTDs and the Digibar Pro are conducted on a regular basis to ensure data quality.

### Cable Counter

RUDE is equipped with an MD Totco Cable counter that measures the side scan towfish tow cable by counting revolutions of the towing block on the A-frame. The length of cable deployed is computed automatically and output to Hypack.

Cable out on Launch 1419 is manually input by survey personnel and read from calibrated taped markings on the SSS cable.

### Bottom Sampler

Where required by project instructions, RUDE personnel acquire sediment samples from the sea floor in the survey area. The primary tool for this operation is a “clamshell” style gravity-closed sediment sampler, which penetrates approximately 0.05m into the bottom.

## **A.5 Data Acquisition and Processing Software**

Coastal Oceanographics Hypack Max is used for survey navigation, Detached Positioning (DP), and VBES data logging. Hypack is also used for overall data acquisition control, and passes file names, line start and end messages, and fix numbers to ISIS via a serial link. In addition, during side scan sonar operations, Hypack collects cable out data and computes towfish position, which, along with raw water depth from the VBES, is also passed to ISIS.

Shallow Water Multibeam and Side Scan Sonar data are collected in the Triton Elics International ISIS software package and logged in the “eXtended Triton Format (.xtf) file format. Because of improved timing precision, vessel position is logged to the “sensor” field of the XTF data structure, and towfish position, if present, is recorded in the “ship” position. Water depth, required for recomputation of towfish position, is stored in “Aux 1”. Cable count is recorded in the “cable out” field.

The PCs running Hypack and Isis are automatically synchronized to UTC time from the NMEA-0183 GPS messages. The time update occurs during the start and stop logging messages on the Hypack computer and during the start-logging message on the Isis computer.

CTD casts are downloaded and processed in the Velociwin program supplied by the Hydrographic Systems and Technology Program (HSTP). This software is also used to process diver’s least depth gauge readings.

Preliminary tide data is either directly collected from the Center for Operational Oceanographic Products and Services’ web site, or sent to RUDE via the “Tidebot” automated tides email system. Verified tides are downloaded from the CO-OPS web site as they become available. All tide data is zone corrected using either MapInfo’s ZDF file creation utility or HSTP’s “HP Tools” software.

All sonar data is processed in the CARIS HIPS and SIPS system.

Processed soundings, side scan sonar contacts, dives, and DPs are inserted and analyzed in HSTP's "Pydro" software. This system is used for all feature assessment and bathymetry excessing.

Final plots are generated in the Mapinfo Professional GIS. Bathymetry gridding and difference mapping for surface analysis in Mapinfo is accomplished using Northwood Geosciences "Vertical Mapper".

Please refer to Appendix II for tables listing data acquisition and processing hardware serial numbers and software versions.

## **B. QUALITY CONTROL**

Please refer to Appendix III for detailed Data Acquisition and Processing Flow Diagrams

### **B.1 Bathymetry Data**

#### Vertical Beam Sonar Data

Vertical Beam sonar data are converted from Hypack format to CARIS format using the CARIS “Hypack” data converter (See Conversion Parameters Appendix II).

After conversion, the data are opened in CARIS Navigation Editor, Attitude Editor, and Single Beam Editor. Vessel navigation data is manually checked for speed jumps greater than 2 knots, which are rejected with interpolation. Attitude data (if present) are checked for errors or gaps. Sounding data are checked for aberrant pings.

Survey personnel scan raw VBES soundings in CARIS Single Beam Editor. The digital data is compared with analog paper records to ensure no valid depths are missed by the bottom detection algorithm or aberrant pings are accepted. Low frequency soundings found to be more shoal than the corresponding high frequency depths can be manually “selected”. Once VBES soundings are scanned, the raw data is corrected for sound velocity and tides then the data is merged. Sound velocity correctors, tide corrected, and merged of raw VBES data are done with CARIS SIPS software package. Once all the raw VBES data is processed, a field sheet is created to grid from all the processed data using a resolution of 25+ meters. A digital terrain model is generated from the gridded data, which is used as a quality control tool on a survey project.

#### Multibeam Sonar Data

Multibeam sonar data are converted from XTF format to CARIS format using the CARIS converter (See Conversion Parameters Appendix II)

After conversion, the data are opened in CARIS Navigation Editor, Attitude Editor, Swath Editor, and Subset Editor. Attitude data is checked for errors or gaps. Vessel navigation data is manually checked for speed jumps greater than 2 kts, which are rejected with interpolation. Raw MBES soundings are first observed in CARIS Swath Editor. Occasionally, bottom type of the survey area or sea state during acquisition cause aberrant pings. These “fliers” are rejected. In main scheme areas, survey personnel employ the CARIS depth filter to facilitate cleaning. The filter is configured as a window with appropriate lateral, upper, and lower constraints chosen based on the expected mean depth and the variability of bathymetry. After applying the filter, survey personnel review the



data to ensure that only those soundings that are clearly incorrect are rejected (See Conversion Parameters Appendix II).

Soundings are then examined in CARIS Subset Editor. Survey personnel examine questionable soundings on a case by case basis, with consideration given to any side scan sonar features in the area, the receive strength of the echo, and surrounding soundings. All soundings that remained ambiguous after this process are identified for further investigation and left in the data set.

#### Final Processing of Sounding Data

After the initial scan of VBES and MBES soundings, the data are sound velocity corrected. The sound velocity profiles that are nearest in time are applied to the sounding data.

Zoned tides are applied in the field to all bathymetry data. Preliminary observed water levels obtained from either the CO-OPS web site or through Tidebot email are used. The tide Zone Definition File (ZDF) is either supplied with the project information or created through MapInfo's export tide region to CARIS HIPS ZDF format utility supplied by HSTP. The resulting zone file and tide files are applied to the corresponding data in CARIS, and merged. When Verified Tides become available, these data are downloaded from the CO-OPS site and applied to the bathymetric data through a re-merge.

Once data acquisition and processing is complete for a particular area, survey personnel check scan all soundings in CARIS subset mode. Subset mode is used for check scanning because it provides an opportunity to examine data in three dimensions and in the context of surrounding lines, therefore highlighting errors which may have affected only a specific line or day. In areas of 100% MBES coverage, overlap also allows many of the ambiguous soundings identified during the initial scan to be resolved.

After final data cleaning and correction is complete, survey personnel create a CARIS field sheet. Areas with bathymetry data from SWMB are gridded with a resolution from 0.33 - 5m, from which digital terrain models and sun-illuminated images are generated. In the case of areas covered with VBES only, grids are created at much a lower resolution to facilitate digital terrain models that can be visually interpreted. These products are analyzed to assess coverage and highlight remaining data problems.

## **B.2 Side Scan Sonar Imagery**

All side scan sonar imagery is converted from SDF or XTF formats to CARIS format using CARIS converters (See conversion parameters Appendix II).

After conversion, the data are opened in CARIS Navigation Editor, Attitude Editor, and Side Scan Editor. Survey personnel check vessel attitude (if present),

cable out, Gyro, and sonar height. Vessel navigation data is manually checked for speed jumps greater than 2 kts. Data showing these speed jumps are rejected with interpolation.

After confirming the validity of the vessel navigation, cable out, and towfish depth values, survey personnel then use the “recompute towfish navigation” function to calculate towfish position. The CARIS towfish positioning is based on a smoothed course made good value from the towing vessel.

Side scan sonar data are scanned in CARIS Side Scan Editor. Survey personnel correct errors in bottom tracking, slant range correct the imagery at default resolution (0.1m), and scanned the data for significant contacts. Contacts deemed “significant” include, but are not limited to, contacts with a shadow indicating a contact height of 1 m or greater in water depths of 20m or less or contact heights 10% of the water depth in water deeper than 20m. Other contacts considered significant by RUDE personnel include smaller contacts in particularly shoal areas or channels, cables and pipelines, large sand wave ridges, and contacts of possible historical significance.

Point feature contacts are picked using CARIS “single point contacts”. Larger and line features are picked using CARIS “multipoint contacts”. All contacts are descriptively labeled and feature codes selected if conclusive identification is possible. Tif images of all contacts are saved. After the initial SSS imagery scan, a check scan of all data is conducted.

Survey personnel assess SSS coverage by using CARIS to mosaic side scan data. These mosaics are drawn at 1 - 5m resolution, using the “autoseam” option.

### **B.3 Data Analysis**

HSTP’s Pydro software package is the primary tool for sounding and feature integration and assessment. Side scan contacts and detached positions are inserted into the Pydro Preliminary Smooth Sheet (PSS). Bathymetry is imported into Pydro at a 15m by 15m shoal-biased grid. Survey sheet officers use Pydro to assess and categorize contacts, and suppress soundings to produce a shoal biased bathymetry data set at the scale of the survey.

Pydro provides five flags for categorizing features: “Significant”, “Chart”, “Report”, “Investigate”, and “DTON”. In addition, pydro provides “Primary” and “Secondary” flags for grouping correlated features.

After insertion, SSS features are first categorized by significance. Contacts that meet the standard of significance described in section B.2. are marked as such; those contacts which are deemed insignificant are marked “Resolved” and not investigated further. Also, multiple contacts representing the same physical

feature are grouped. The contact that the hydrographer believes best represents the feature (typically, the most clear SSS image) is selected as the “Primary” contact, while the rest are flagged as “Secondary.”

Significant contacts are then reassessed to determine if additional investigation (typically SWMB development) is required. Using the “bathymetry grid” feature of pydro, the hydrographer checks the bathymetry coverage of the contact in question. If additional bathymetry is required, the “investigate” flag is checked. This can then be queried in Mapinfo to select only those contacts requiring development for line planning.

After contacts are sufficiently investigated, they are further assessed to determine whether they require charting. Features that the hydrographer believes should be added or retained on the chart are marked as such. Features that will be reported in the survey Descriptive Report are flagged “Report.” Features that pose a special threat to vessel traffic have their shoal soundings marked as “DTONS”, and a Danger to Navigation Report is generated.

Each physical feature should have one Pydro contact as the “Primary” contact. This contact represents the best information (horizontal and vertical position) available at the time. Many contacts that represent the same physical feature may be marked “Secondary” and should be thought of as additional information only.

Contacts and bathymetry analyzed in Pydro are opened in Mapinfo for plotting and contact development planning. Contact and sounding plots are printed at survey scale for final survey assessment.

## **C. CORRECTIONS TO ECHOSOUNDINGS**

It is OCS and RUDE policy that all data be acquired and logged in raw format without application of any corrections for vessel offsets, sensor alignment, sound velocity profile, or tides. These factors are logged separately or contained in the CARIS “Vessel Configuration File” (VCF), and applied in post-acquisition data processing.

### **C.1 Vessel Offsets and Static Draft**

#### **RUDE**

Vessel offsets for NOAA Ship RUDE include transducer positions, tow points, and GPS antenna referenced to the IMU. The RUDE gained a new A-Frame,

which required measurements. All measurements are reflected in the offset drawing included in Appendix III.

In the spring of 2004 RUDE and launch 1419 both conducted patch tests to determine navigation timing and multi-beam head alignment errors for the CARIS Vessel Configuration File. The results of this operation are included in Appendix III.

#### Launch 1419

Launch 1419's offsets to include Reson 8124 multibeam bat pole, transducer positions, tow points, and GPS antenna are referenced to the DMS05 unit. See Appendix III for 1419's offset diagram

#### Application

Static transducer offsets are applied to all bathymetry data during the CARIS "SVP Correct" operation. Horizontal offsets are applied during CARIS "Merge".

### **C.2 Dynamic Draft**

#### RUDE

RUDE's dynamic draft was determined by traditional rod leveling methods. A report describing this operation and its results is included in Appendix III

#### Launch 1419

Launch 1419's dynamic draft was determined by traditional rod leveling methods. A report describing this operation and its results is included in Appendix III

#### Application

Dynamic Draft corrections are applied to all bathymetry data in the CARIS "SVP Correct" operation.

### **C.3 Attitude and Heave**

Heave, pitch, and roll corrections are applied to SWMB bathymetry data in the CARIS "SVP Correct" operation. Yaw corrections are applied during CARIS "Merge". Only heave and yaw corrections are applied to VBES data.

#### **C.4 Sound Velocity Profile**

RUDE carries two Seabird SBE-19 Conductivity, Temperature, and Depth profilers. These instruments are returned to the manufacturer yearly for calibration. Records of the latest calibrations are included in Appendix IV.

RUDE personnel conduct CTD data quality assessments prior to a new sheet survey project by comparing CTD readings at the surface with Digibar Pro and a bucket thermometer. This information is processed using Velociwin “comparison cast” feature.

As described in Section A.4, A.5, and B.1, raw conductivity, temperature and depth data are processed to produce sound velocity files in CARIS format. These profiles are applied in CARIS “SVP Correct”.

#### **C.5 Water Levels**

Soundings are corrected to Mean Lower Low Water using first Preliminary Unverified tides, and then Verified tides when available, according to the procedure described in Section B.1. All raw tide data are corrected according to the zoning provided with the relevant project instructions prior to application to bathymetry data.

During bathymetric data collection, subordinate gauges included in the project instructions are monitored via the CO-OPS web site, “Tidebot” email, and the CORMS Morning Report. When water level measurement problems are suspected, RUDE personnel bring them to the attention of CO-OPS staff before continuing bathymetric data acquisition.

Water level corrections are applied during CARIS “Merge”.

**D. APPROVAL SHEET****LETTER OF APPROVAL**

Data acquisition and processing are conducted under my direct supervision with frequent personal checks of progress and adequacy. All equipment is continuously monitored for proper operation during data acquisition and all supplemental and supporting records are reviewed in their entirety.

This Data Acquisition and Processing Report is adequate to accompany Descriptive Reports for surveys including data collected during NOAA Ship RUDE's 2004 Field Season.

Respectfully Submitted:

---

Richard Edmundson  
Ensign, NOAA  
Field Operations Officer  
NOAA Ship RUDE

Approved:

---

Todd A. Haupt  
Lieutenant, NOAA  
Commanding Officer  
NOAA Ship RUDE

NOAA Ship RUDE (s590)

2004 DAPR

**D. APPROVAL SHEET****LETTER OF APPROVAL**

Data acquisition and processing are conducted under my direct supervision with frequent personal checks of progress and adequacy. All equipment is continuously monitored for proper operation during data acquisition and all supplemental and supporting records are reviewed in their entirety.


This Data Acquisition and Processing Report is adequate to accompany Descriptive Reports for surveys including data collected during NOAA Ship RUDE's 2004 Field Season.

Respectfully Submitted:



Richard Edmundson  
Ensign, NOAA  
Field Operations Officer  
NOAA Ship RUDE

Approved:

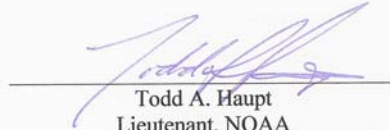

Todd A. Haupt  
Lieutenant, NOAA  
Commanding Officer  
NOAA Ship RUDE

Please use the following links to view Appendix I-IV

[Appendix\\_I\Appendex\\_I.doc](#)

[Appendix\\_II\Appendex\\_II.doc](#)

[Appendix\\_III\APPENDIX III.doc](#)

[Appendix\\_IV\APPENDIX IV.doc](#)



**APPENDIX I**

**Data Acquisition Equipment Summary Table**

**Data Acquisition and Processing Software Summary Table**

**Summary Table of Data Acquisition Equipment**

<b>Equipment Description</b>	<b>Serial Number</b>	<b>Dates Used</b>
RUDE		
Reson SeaBat 8125 SWMB	31562	all
Odom Echotrac Mk II VBES	9812	all
KLEIN 5500 Towfish	278	all
KLEIN TPU Series 5105	138	all
POS/MV 320	219	all
Inertial Measurement Unit (IMU)	047	all
Trimble DSM-212L DGPS Receiver	0220227632	all
Magnavox MX-50 Beacon Receiver	079	all
Seabird Seacat SBE-19 CTD	284	all
	1991	all
Odom Digibar Pro SV Sensor	98013	all
Yokogawa CMZ700S Gyrocompass	0202	all
Launch 1419		
<b>Reson Seabat 8124 SWMB</b>	UNK	Fall 2003
Odom Echotrac Mk II VBES	9641	all
KLEIN 3000 Towfish	408	all
KLEIN TPU Series 3100	408	all
Starlink DNAV-212 DGPS Receiver	850	all
TSS Dynamic Motion Sensor DMS05	0022068	all
Meridian Surveyor Gyrocompass	2279	all



**APPENDIX II: Data Acquisition and Processing Flow Diagrams**

**RUDE Data Acquisition Setup**

**Launch 1419 Data Acquisition Setup**

**CARIS Data Processing Diagram**

**Pydro Data Processing Diagram**


**Data Conversion Parameters**

Please use link to view Rude 2004 Data Acquisition setup

[rude\\_setup.ppt](#)

Please use link to view Launch 1419 2004 Data Acquisition setup




[1419\\_setup.ppt](#)

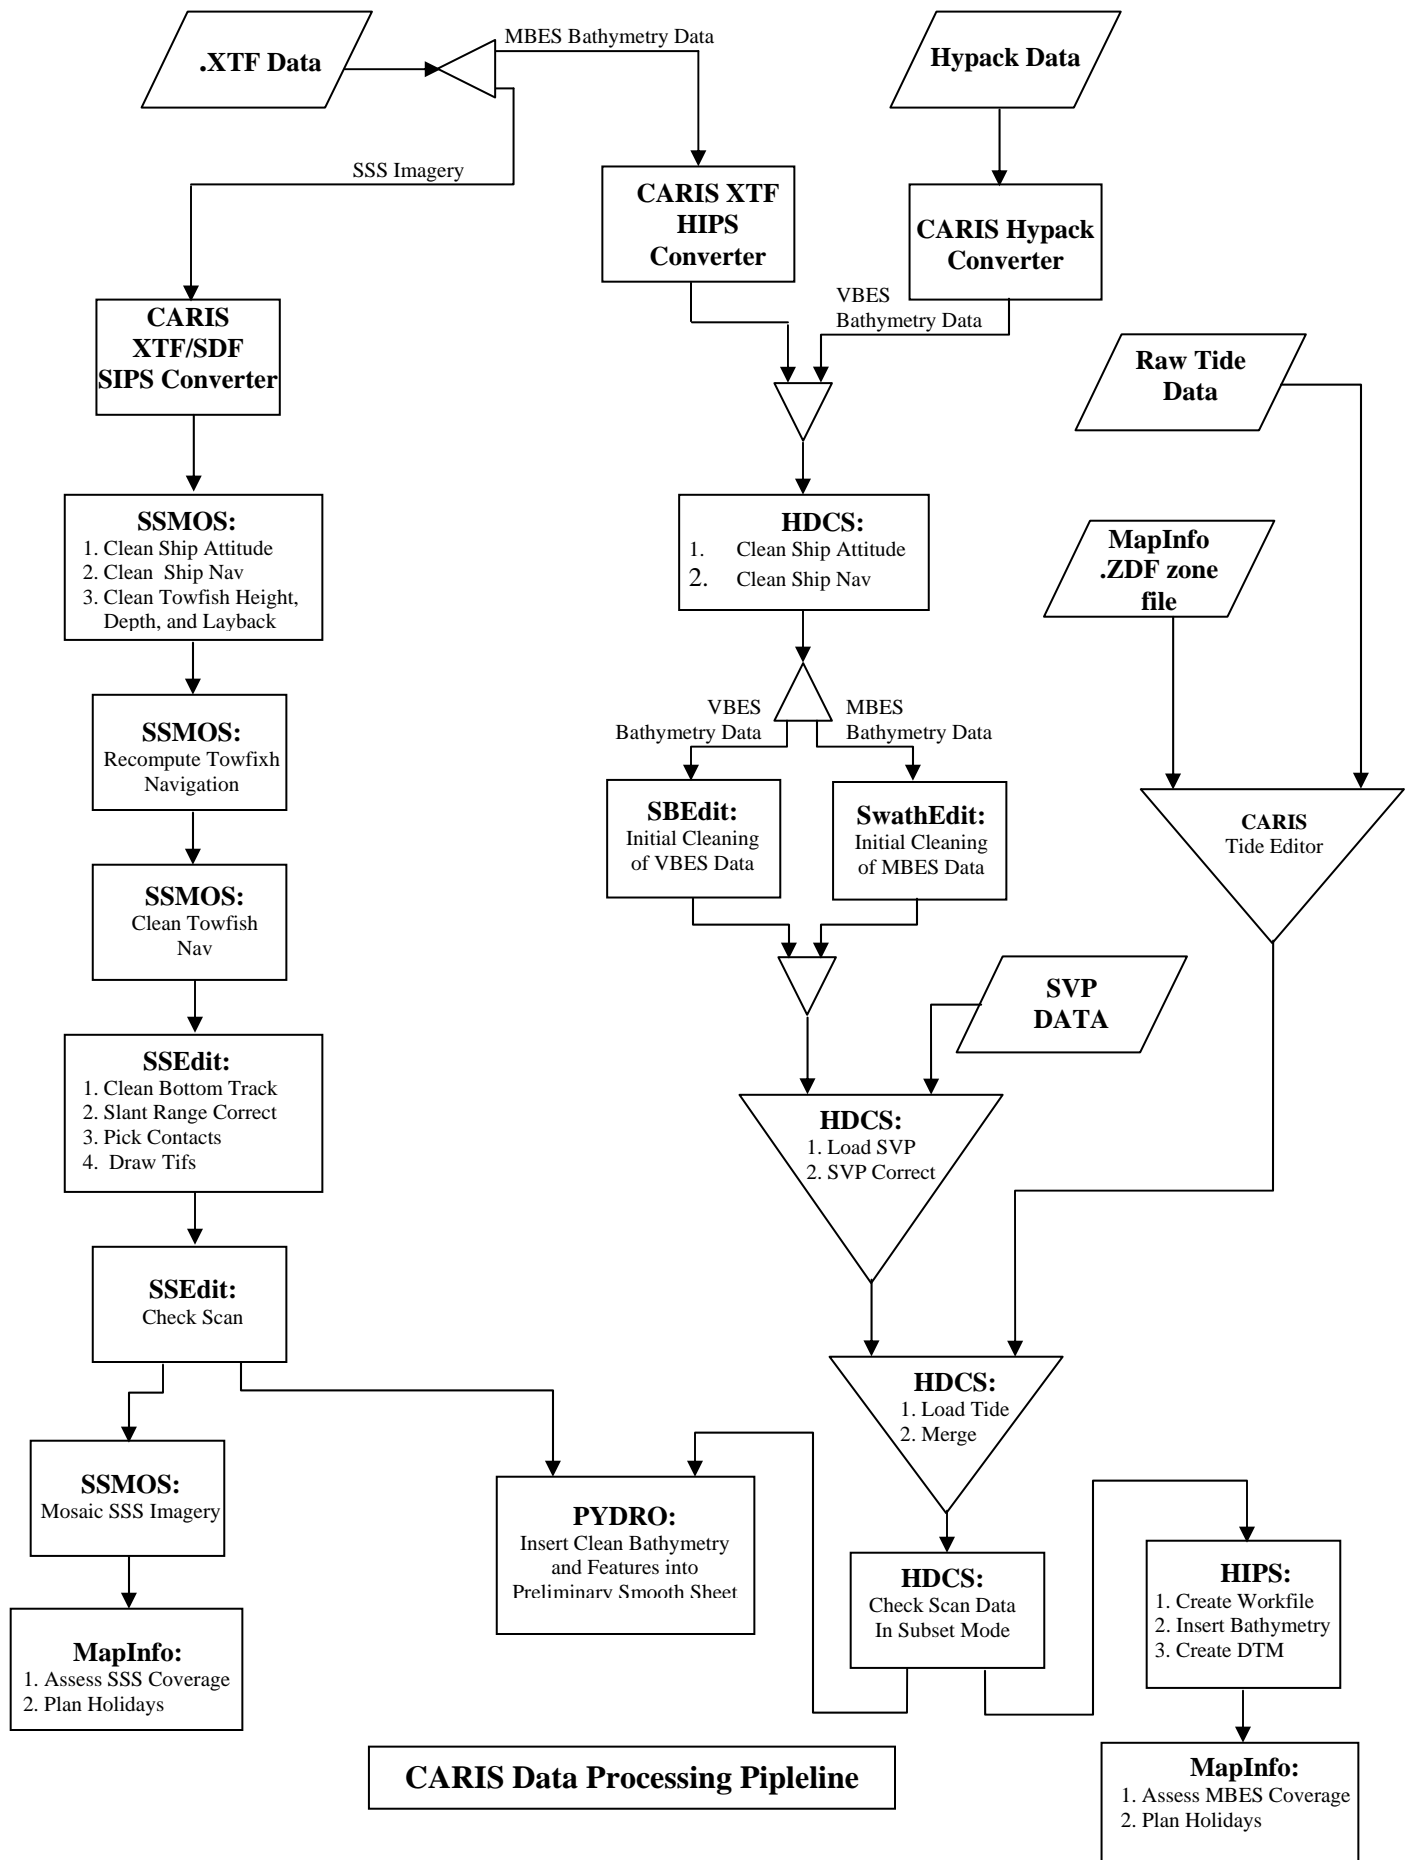

Please use link to view Pydo Logic file

[Pydro Logic.doc](#)

The following three images are screen grabs from Caris conversion wizard for RUDE SWMB conversion.

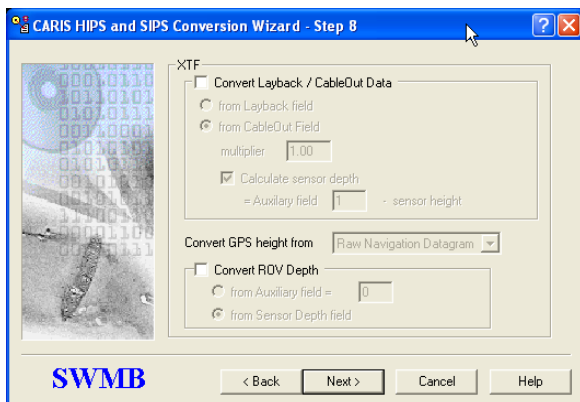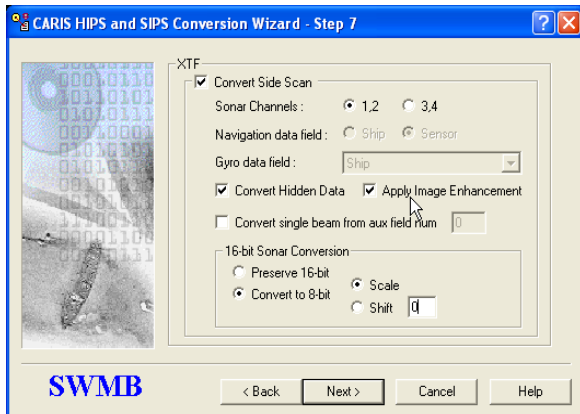
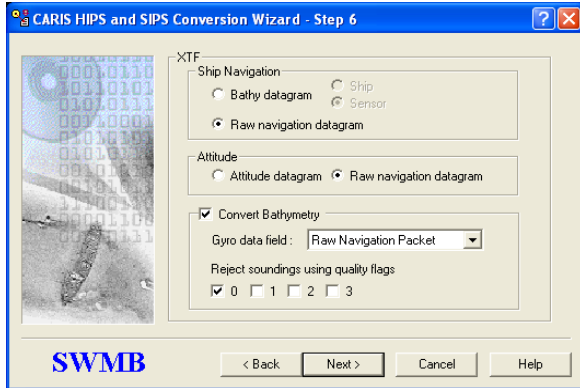





The following image is a screen grab from Caris conversion wizard for RUDE SBES conversion.








The following three images are screen grab from Caris conversion wizard for RUDE SSS conversion.

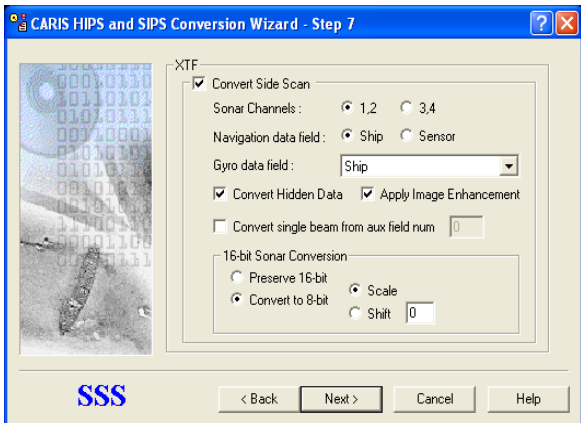
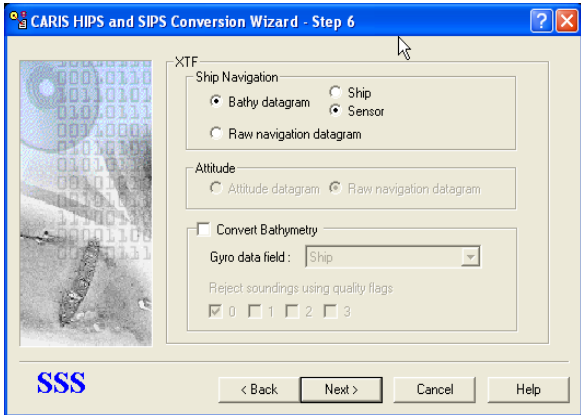


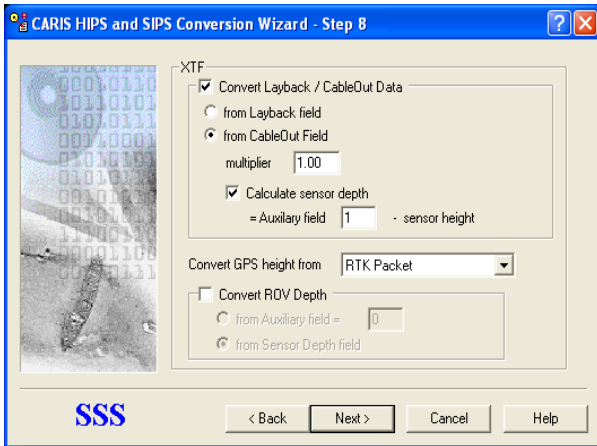

The following images are screen grab from Caris conversion wizard for launch 1419 conversions.

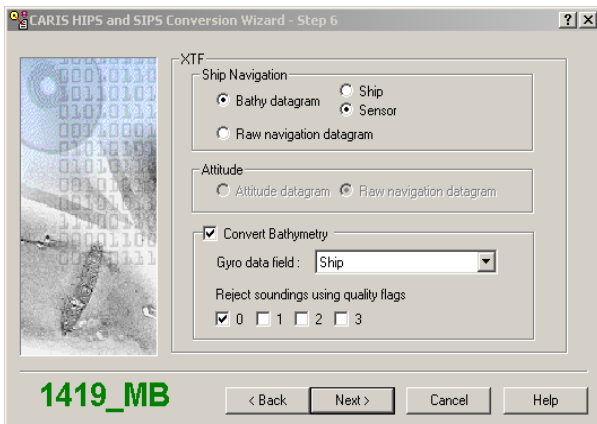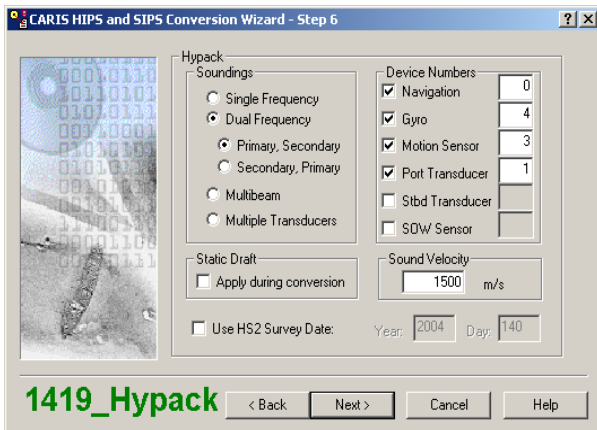

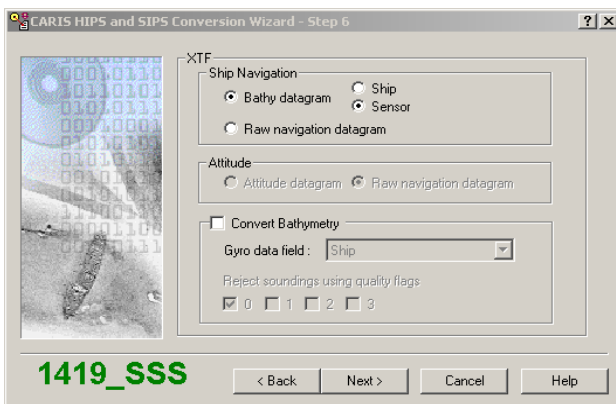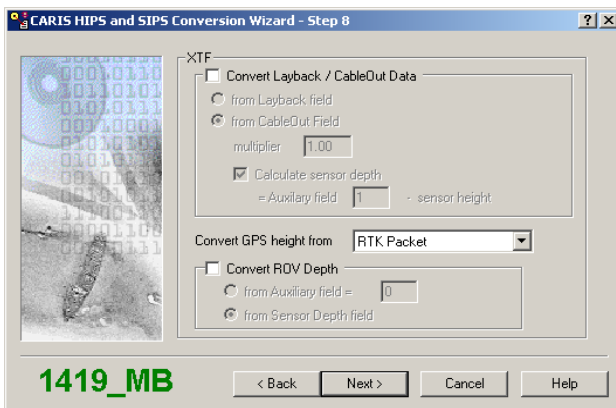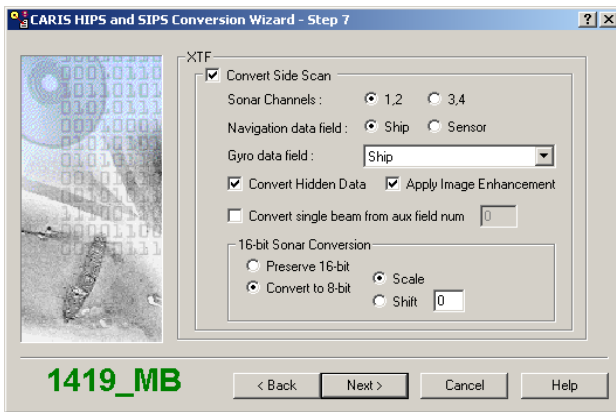

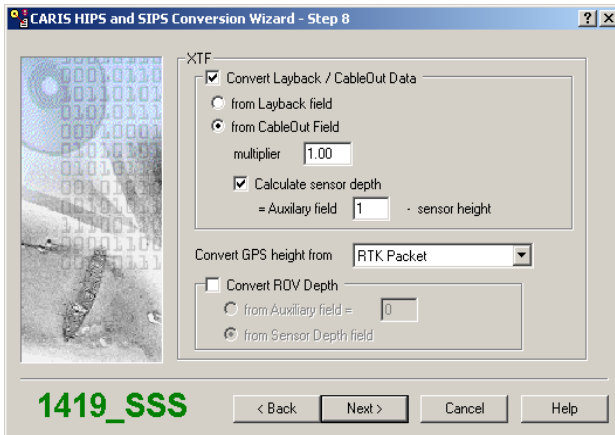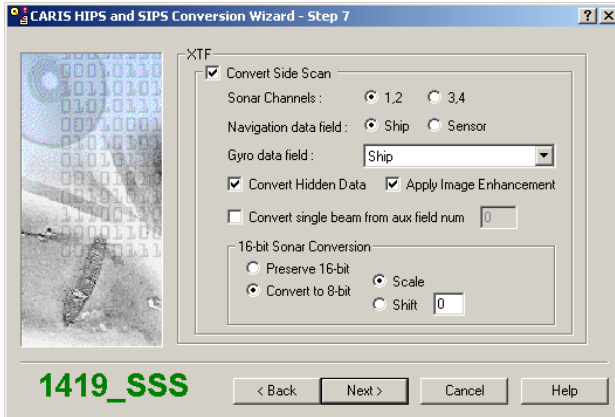

**APPENDIX III**

**RUDE Offset Diagram**

**RUDE CARIS Vessel Configuration File Reports**

**Launch 1419 Offset Diagram**

**Launch 1419 Vessel Configuration File Reports**

**POS/MV Configuration**

Please use link to view Rude offset diagram

[RUDE\\_Offsets.ppt](#)

<b>RUDE OFFSETS</b>		07/01/04	
<b>System origin: Reference Point (IMU)</b>		X-axis 0 at RP, positive towards starboard.	
		Y-axis 0 at RP, parallel with keel, positive towards bow.	
		Z-axis 0 at RP, positive downward.	
		all measurements in METERS unless noted.	
<b>SENSOR</b>	<b>X-axis (+ towards stbd)</b>	<b>Y-axis (+ towards bow)</b>	<b>Z-axis (+ down)</b>
ODOM HI FREQ	-0.30	1.72	2.11
ODOM LO FREQ	0.74	1.12	2.20
POS/MV PORT	0.0	0.0	0.0
POS/MV STBD	0.0	0.0	0.0
TRIMBLE ANT	-0.22	-0.36	-13.00
Reson 8125 Tranducer HEAD	-3.48	-6.15	1.90
Reson 8125 Tranducer HEAD	-1.92 (roll)	0.20 (pitch)	-0.90 (yaw)
A-FRAME	0.00	-18.01	-4.48
IMU	-0.05°	1°	-0.28°

The following three files are CARIS Vessel Configuration File Reports for the RUDE.  
Use the links below to view the files:

[RU00\\_MB.txt](#)

[RU00\\_SSS.txt](#)

[RU00\\_SB.txt](#)

Please use link to view Launch 1419 offset diagram

[Launch\\_1419\\_Offsets.ppt](#)



The following three files are CARIS Vessel Configuration File Reports for Launch 1419.  
Use the links below to view the files:



[RU01\\_MB.txt](#)

[RU01\\_SSS.txt](#)

[RU01\\_SB.txt](#)

The following images are screen grabs from the RUDE POS/MV software

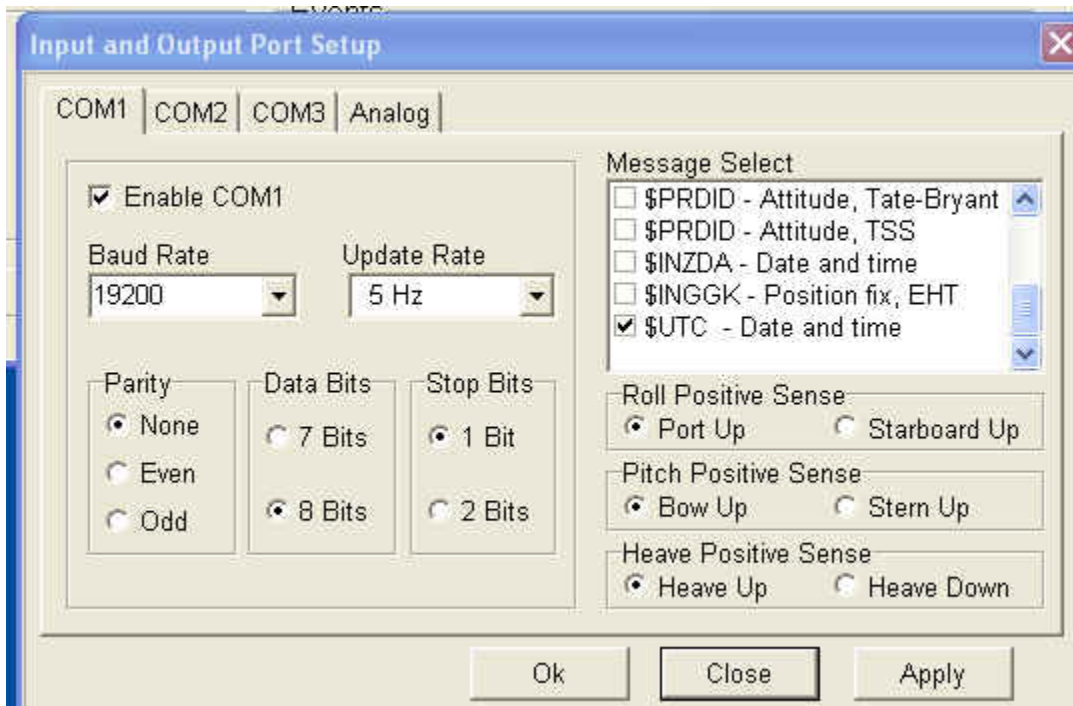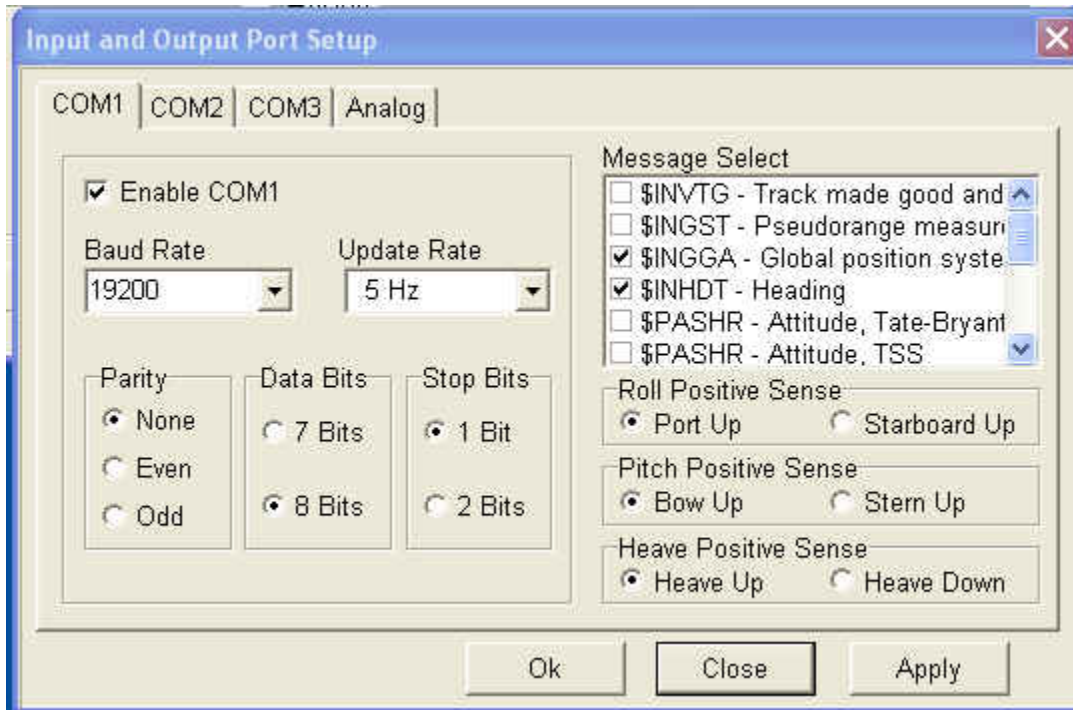

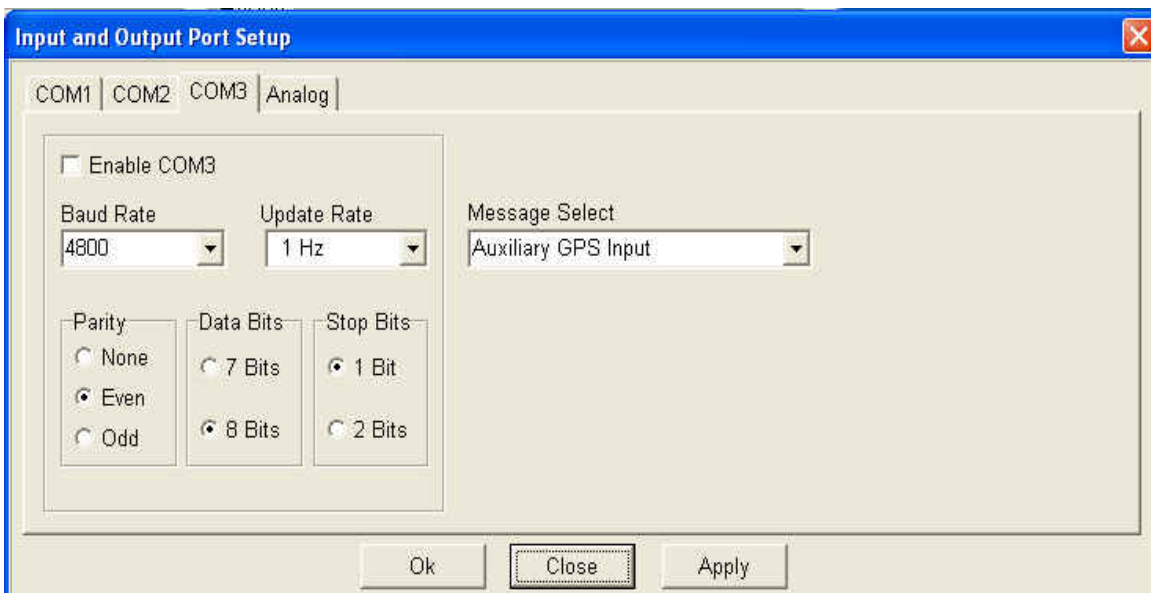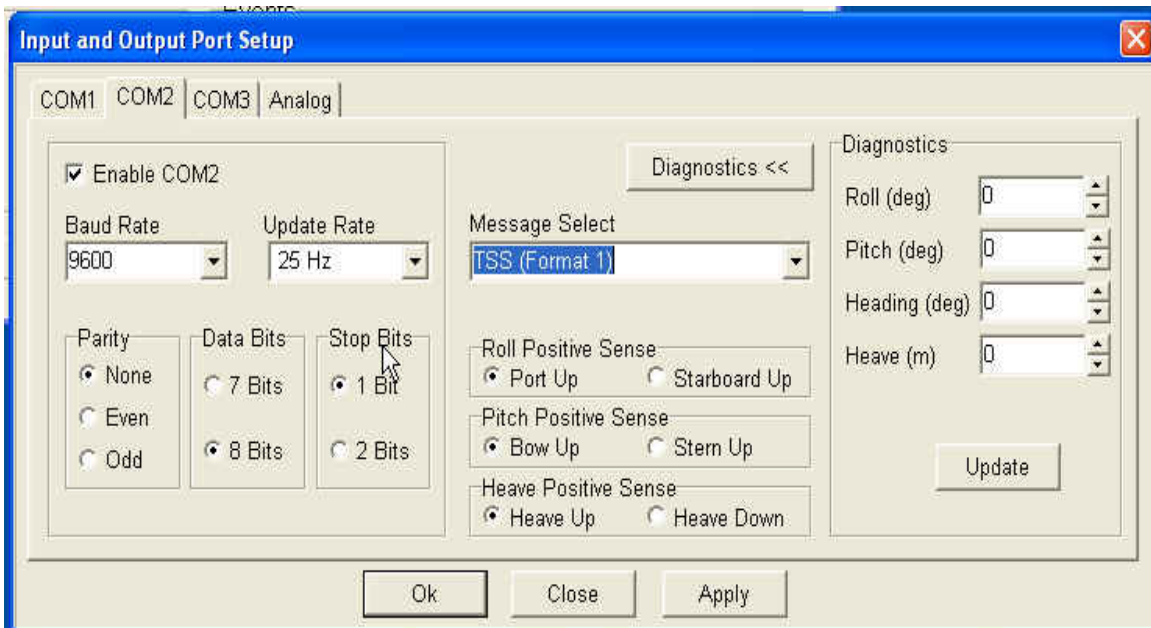



**GAMS Parameter Setup**

Two Antenna Separation (m)

Heading Calibration Threshold (deg)

Baseline Vector

X Component (m)

Y Component (m)

Z Component (m)

**Lever Arms & Mounting Angles**

Lever Arms & Mounting Angles | Sensor Mounting | Tags, Multipath & AutoStart

Ref. to IMU Lever Arm

X (m)

Y (m)

Z (m)

IMU Frame w.r.t. Ref. Frame

X (deg)

Y (deg)

Z (deg)

Ref. to Primary GPS Lever Arm

X (m)

Y (m)

Z (m)

Ref. to Heave Lever Arm

X (m)

Y (m)

Z (m)

Ref. to Vessel Lever Arm

X (m)

Y (m)

Z (m)


Notes:

1. Ref. = Reference
2. w.r.t. = With Respect To
3. Reference Frame and Vessel Frame are co-aligned.

**Lever Arms & Mounting Angles** ✖

Lever Arms & Mounting Angles | Sensor Mounting | Tags, Multipath & AutoStart

Ref. to Aux. 1 Gps Lever Arm		Ref. to Aux. 2 GPS Lever Arm	
X (m)	-0.360	X (m)	0.000
Y (m)	-0.220	Y (m)	0.000
Z (m)	-13.000	Z (m)	0.000
Ref. to Sensor 1 Lever Arm		Sensor 1 Frame w.r.t. Ref. Frame	
X (m)	0.000	X (deg)	0.000
Y (m)	0.000	Y (deg)	0.000
Z (m)	0.000	Z (deg)	0.000
Ref. to Sensor 2 Lever Arm		Sensor 2 Frame w.r.t. Ref. Frame	
X (m)	0.000	X (deg)	0.000
Y (m)	0.000	Y (deg)	0.000
Z (m)	0.000	Z (deg)	0.000

 Ok Close Apply

**APPENDIX IV**

**RUDE Settlement and Squat Report**

**Launch 1419 Settlement and Squat Report**

**RUDE Reference Surface Report**

**Lead Line / Divers Least Depth Gauge Comparison Report**

**CTD Calibration Reports**

**Divers Least Depth Gauge Calibration Report**

Settlement and Squat operations  
Feb 13, 2004

#### NOAA Ship RUDE



On Feb 13, 2004 settlement measurements were conducted off of the northeastern most corner of the Naval Deperming Station in Portsmouth, VA. ENS Edmundson and SST Kitt were positioned at the northeastern most point of the deperming station. Ltjg Yoos piloted the Rude while LT Haupt was rodman. SST Kitt took the shots while ENS Edmundson was the recorder. RUDE was full of fuel and water.

The ship made passes toward (RUDE's STBD) and away (RUDE's PORT) from the pier, coming within approximately 100 meters of the pier at its closest point. The ship heading was approximately north-south for all passes. Rods were placed on bolts on the starboard and port sides of the ship, and measurements were taken from an arbitrary vertical point since the difference between "at rest" and underway were being determined.

Shots were taken for passes of engine RPMs at one engine clutch ahead, both engines clutch ahead, 1000, 1200, 1400, 1600, and 1800. Shots to the STBD side were taken "toward" and shots to the PORT side were taken "away". Between each run an "at rest" measurement was taken, alternating between the port and starboard sides. LTjg YOOS and ENS Edmundson communicated via radio when RPM was at desired level and when a successful measurement had been taken.

To determine settlement, a difference between the "at rest" position and underway position is calculated. First the "toward" and "away" measurements for "at rest" and underway measurements are averaged. This negates any effect current may have on ship speed. The difference between the "at rest" average and underway average are then taken to determine the ship settlement. The settlement is then plotted as a function of ship speed



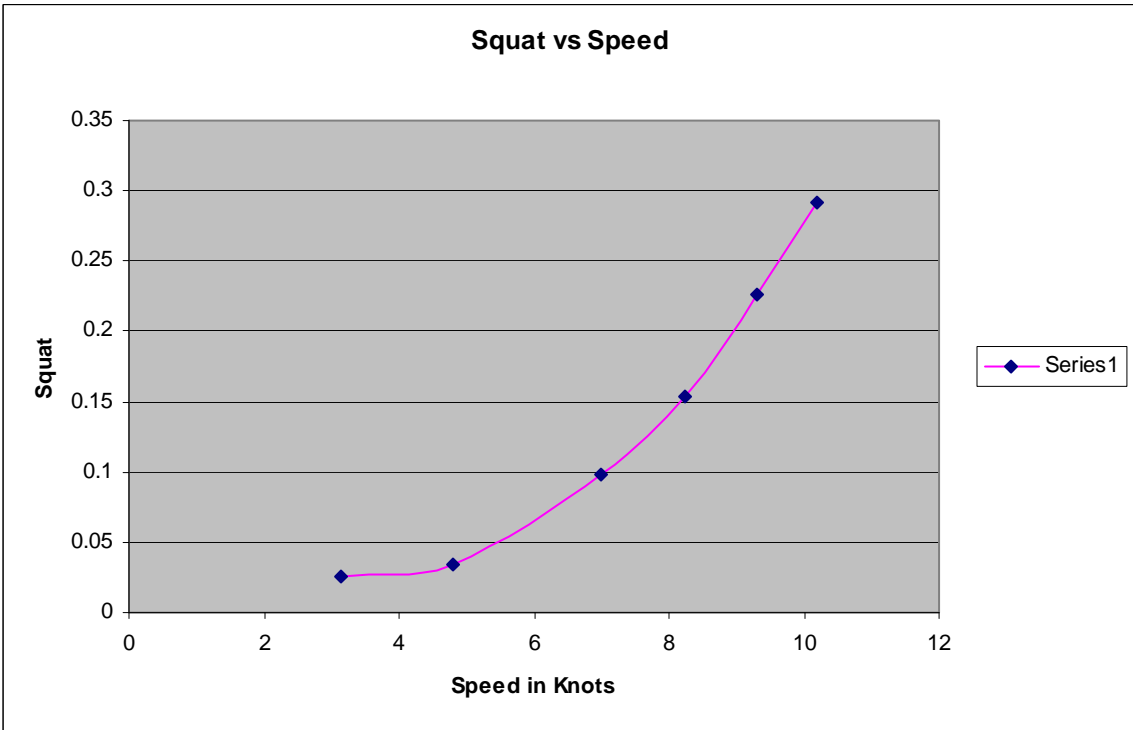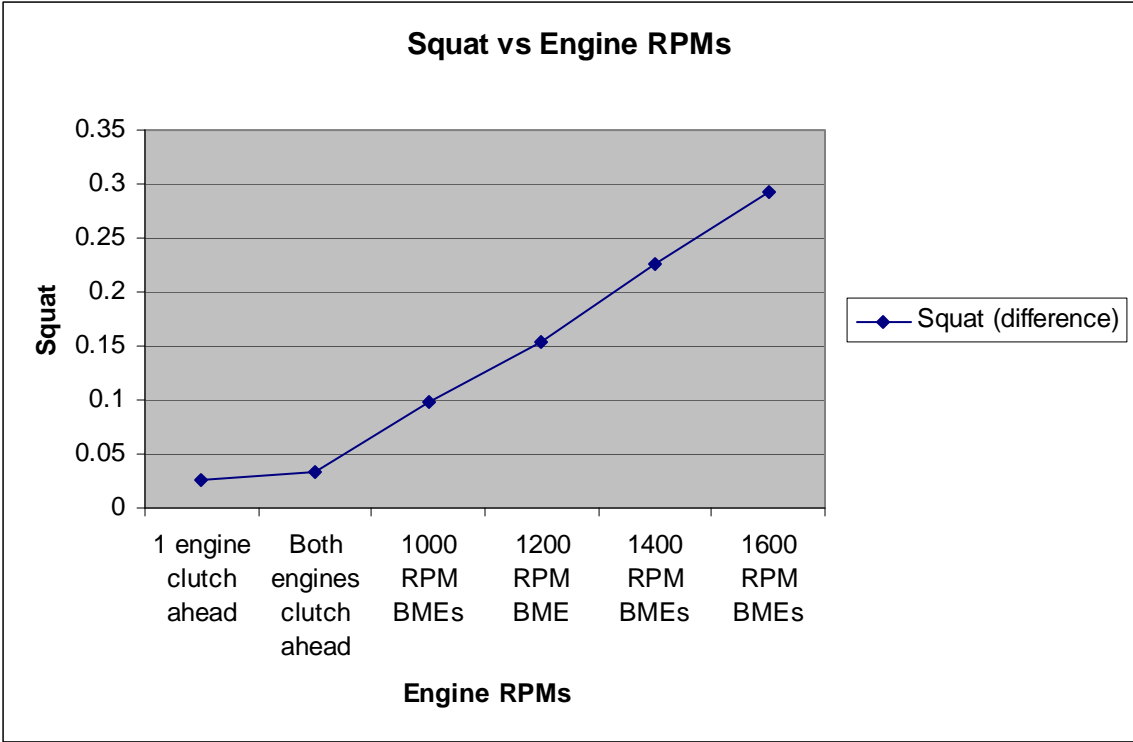


## Settlement Measurements

March 18, 2004

NOAA Launch 1419


On March 18, 2004, settlement measurements for Launch 1419 were conducted off of the Hospital Point pier in Portsmouth, VA. LT(jg) Charles “Jake” Yoos piloted the launch while AST Harlan “Chip” Stephens was rodman. SST Wes Kitt shot measurements to the launch from the pier as ENS Richard Edmundson recorded readings.

The launch was measured at an arbitrary point at rest, and then during two successive passes of the same RPM. The average of the measurements while underway was taken, and the difference between the at-rest and average underway value is the settlement for that given RPM. Measurements were taken at idle, 1000, 1500, 2000, 2500, 3000, 3500, and 4000 RPM. The settlement is then plotted as a function of the ship speed.

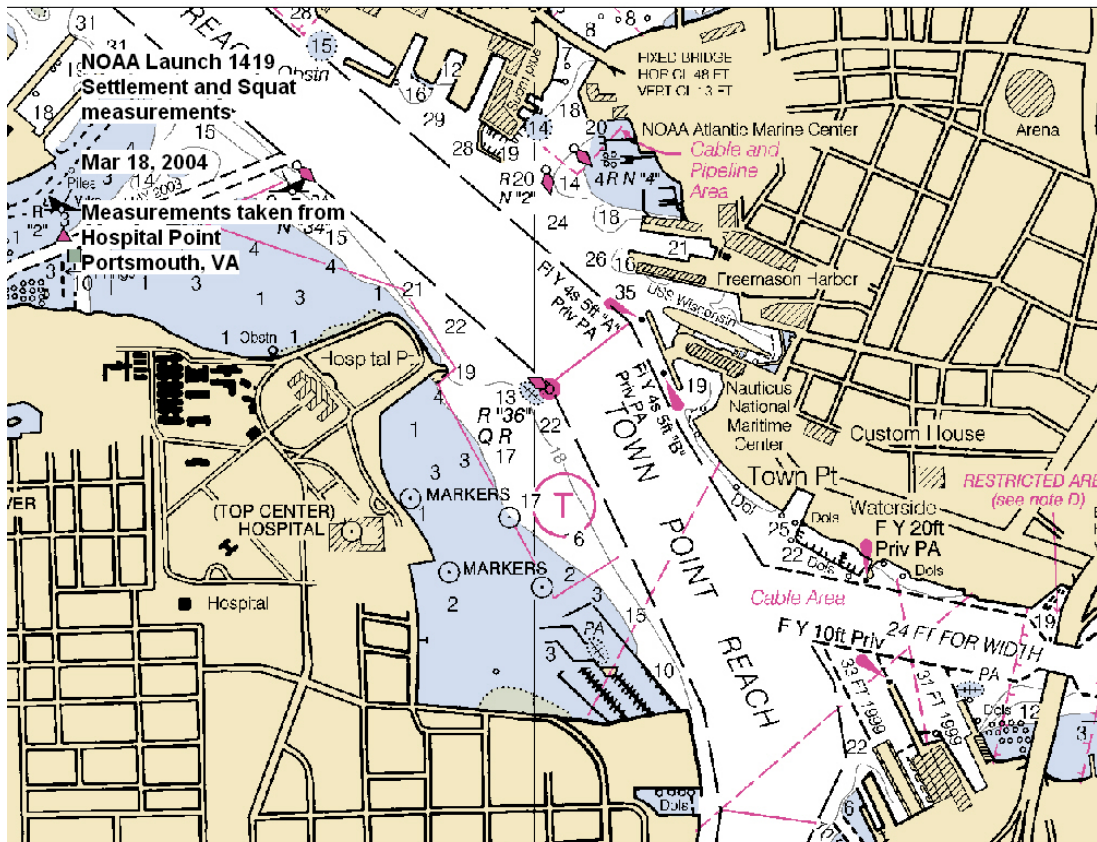

Please use the link below to view settlement and squat data from the Launch 1419

[Settlement\\_Squat\1419\1419\\_set\\_and\\_squat\\_04.xls](#)

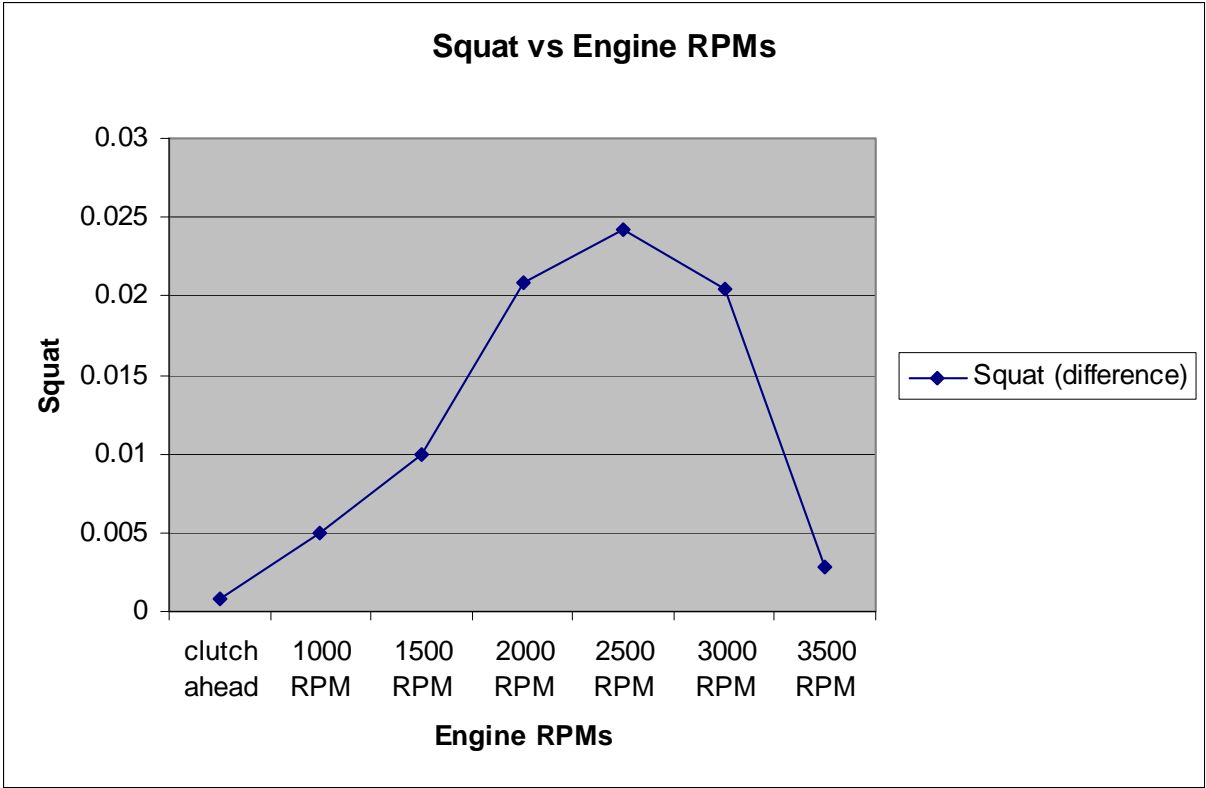



# **Reference Surface Test Report**

## **NOAA Ship RUDE (s590) 16 July 2004 (DN198)**

On Friday, 16 July 2004, NOAA Ship RUDE conducted a reference surface test to assess the performance of the Reson 8125 (SN 31562) Shallow Water Multi-Beam system. Data from this test were processed according to standard RUDE procedure, and analyzed using the "QC Report" utility in CARIS GIS 4.4a. Statistical comparison of inner and outer beams confirmed that under the conditions of this test, RUDE's SWMB system meets the IHO S44 4<sup>th</sup> Ed. "Order 1" and "Special Order" standards for hydrographic surveys as specified in the NOAA Specifications and Deliverables.

The reference surface test was performed in approximately 11 meters of water over a relatively flat surface in an area 6 meters southwest of Prudence Island in Narragansett Bay. The Reson 8125 data was acquired over a pattern of 8 mainscheme lines spaced to allow 100% coverage and one cross line perpendicular to the mainscheme lines. A chartlet showing the test area and survey lines is attached to this report.

Weather and sea conditions during the time of the test were ideal, with light wind, seas less than 1 foot, and no swell. All data was acquired according to standard RUDE procedures, with ship speed kept near 7 knots to increase sounding density in the areas of overlap and increase the size of the data set for statistical analysis.

Multibeam soundings were processed in CARIS HIPS according to standard RUDE procedure. Sound velocity correctors derived from a CTD cast taken at the time of the survey were applied, and the data was merged with offsets values determined from a patch test conducted with the same data. A separate HIPS workfile was created for the main scheme and check lines. Line 115\_1506 soundings were exported for use as check lines. All other line soundings were exported as main scheme. No binning was applied to the soundings on export. A DTM of the main scheme lines was created in CARIS GIS 4.4a at 0.33m grid size.

The "QC Report" utility was run to compare the main scheme and cross lines, the results of which are attached. "Classification Report 4" shows that under the conditions at the time of the survey, all beams processed used to generate soundings (1-240) meet the IHO S44 4<sup>th</sup> Ed. "Order 1" standard, as required in the NOAA Specifications and Deliverables. In addition, "Classification Report 3" shows that for this survey, all beams also met the "Special Order" standard.



# Reference Surface Test Report

## NOAA Launch 1419 15 July 2004 (DN197)

On Thursday, 15 July 2004, NOAA launch 1419 conducted a reference surface test to assess the performance of the Reson 8124 (SN **UNK**) Shallow Water Multi-Beam system. Data from this test were processed according to standard RUDE procedure, and analyzed using the "QC Report" utility in CARIS GIS 4.4a. Statistical comparison of inner and outer beams confirmed that under the conditions of this test, RUDE's SWMB system meets the IHO S44 4<sup>th</sup> Ed. "Order 1" and "Special Order" standards for hydrographic surveys as specified in the NOAA Specifications and Deliverables.

The reference surface test was performed in approximately 11 meters of water over a relatively flat surface in an area 6 meters southwest of Prudence Island in Narragansett Bay. The Reson 8124 data was acquired over a pattern of 8 mainscheme lines spaced to allow 100% coverage and one cross line perpendicular to the mainscheme lines. A chartlet showing the test area and survey lines is attached to this report.

Weather and sea conditions during the time of the test were ideal, with light wind, seas less than 1 foot, and no swell. All data was acquired according to standard RUDE procedures, with ship speed kept near 7 knots to increase sounding density in the areas of overlap and increase the size of the data set for statistical analysis.

Multibeam soundings were processed in CARIS HIPS according to standard RUDE procedure. Sound velocity correctors derived from a CTD cast taken at the time of the survey were applied, and the data was merged with offsets values determined from a patch test conducted with the same data. A separate HIPS workfile was created for the main scheme and check lines. Line 116\_1506 soundings were exported for use as check lines. All other line soundings were exported as main scheme. No binning was applied to the soundings on export. A DTM of the main scheme lines was created in CARIS GIS 4.4a at 0.33m grid size.

The "QC Report" utility was run to compare the main scheme and cross lines, the results of which are attached. "Classification Report 4" shows that under the conditions at the time of the survey, all beams processed used to generate soundings (1-240) meet the IHO S44 4<sup>th</sup> Ed. "Order 1" standard, as required in the NOAA Specifications and Deliverables. In addition, "Classification Report 3" shows that for this survey, all beams also met the "Special Order" standard.

Please use the link below to view the QC report for the RUDE. The report was generated by CARIS GIS software.

[Reference Surface\1419\report\\_1419.lis](#)

# **Lead Line Comparison Report**

## **NOAA Ship RUDE (s590) and Launch 1419 July 16, 2004 (DN198)**

On Friday, July 16, 2004 (DN198) at approximately 1314 UTC, NOAA Ship RUDE conducted a lead line comparison check to confirm the performance of the ship's multibeam, the ship and launch 1419 singlebeam echosounders, and resolve questions regarding the accuracy of RUDE's diver least depth gauge. At approximately 1323 UTC, a second lead line comparison check was performed to check the accuracy of the launch 1419's multibeam.

The ship was anchored in approximately six meters of water four meters southwest of Prudence Island in Narragansett Bay and launch 1419 was tied along-side on the port side quarter. A multibeam echosounder survey was conducted on 15 July 2004 by launch 1419 for a reference surface test and to confirm that the bottom at the proposed test site was flat and free of obstructions. After anchoring, two CTD casts were taken to compare sound velocities between the two CTD casts and the digibar sound profilers on 1419's and RUDE's multibeam system. Divers were deployed in a buddy pair with a diver's least depth gauge. Once the divers were in the water, the diver's least depth was annotated, 1419's and RUDE's single beam and RUDE's multi beam data acquisition were started. The lead line was deployed from the port rail immediately forward of the RUDE's multi-beam sonar head. While sonar data was acquired, the divers dove to the bottom to read and annotate the gauge at the bottom. Personnel at the surface recorded the lead line readings. A second dive was performed the about ten minutes later to compare 1419's multibeam, leadline and least depth gauge.

Conditions at the test site were calm with wave heights less than one foot and no observable swell. The time of the test was about 15 – 20 minutes after slack. The bottom at the test site was a sticky mud bottom type.

All data were acquired and processed according to standard RUDE procedures. Lead line depths were obtained by observing water line indications on the line and converting to meters. Likewise, single and multi-beam depths were obtained by averaging depths recorded at the time of the dive. Diver least depth gauge depths were processed in Velociwin 7.01. As the test was conducted at near low water and was complete within 2 minutes, no tide correctors were applied to the soundings.

Results of the test are tabulated on the following page. These results confirmed that under the prevailing conditions at the time of the test, RUDE's survey systems meet the IHO S44 4<sup>th</sup> Edition "Order 1" standard for hydrographic survey depth sounding accuracy as specified in the NOAA Specifications and Deliverables.

Please use the link below to view leadline information spreadsheet:

[Leadline\\_2004\LeadLine04.xls](#)