

U.S. DEPARTMENT OF COMMERCE  
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  
NATIONAL OCEAN SERVICE

## Data Acquisition & Processing Report

*Type of Survey* Hydrographic  
*Project No.* 2014 *Rainier* field season  
*Time frame* April - November 2014

### LOCALITY

*State(s)* Alaska and Washington  
*General Locality* North Coast of Kodiak Island, Alaska  
Southern Alaska Peninsula, Alaska  
Strait of Juan De Fuca, Washington

2014

### CHIEF OF PARTY

Commander Edward J. Van Den Ameele, NOAA

### LIBRARY & ARCHIVES

DATE

# Table of Contents

<u>A Equipment</u> .....	<u>1</u>
<u>A.1 Survey Vessels</u> .....	<u>1</u>
<u>A.1.1 NOAA Ship Rainier (WTEF)</u> .....	<u>1</u>
<u>A.1.2 RA3 (WZ2573)</u> .....	<u>3</u>
<u>A.1.3 RA4 (WZ2574)</u> .....	<u>6</u>
<u>A.1.4 RA5 (WZ2575)</u> .....	<u>10</u>
<u>A.1.5 RA6 (WZ2576)</u> .....	<u>14</u>
<u>A.1.6 RA7</u> .....	<u>17</u>
<u>A.1.7 RA8</u> .....	<u>18</u>
<u>A.2 Echo Sounding Equipment</u> .....	<u>20</u>
<u>A.2.1 Side Scan Sonars</u> .....	<u>20</u>
<u>A.2.2 Multibeam Echosounders</u> .....	<u>20</u>
<u>A.2.2.1 Kongsberg EM710</u> .....	<u>20</u>
<u>A.2.2.2 Reson SeaBat 7125-B</u> .....	<u>22</u>
<u>A.2.2.3 Reson SeaBat 7125 SV2</u> .....	<u>24</u>
<u>A.2.3 Single Beam Echosounders</u> .....	<u>27</u>
<u>A.2.4 Phase Measuring Bathymetric Sonars</u> .....	<u>27</u>
<u>A.2.5 Other Echosounders</u> .....	<u>27</u>
<u>A.3 Manual Sounding Equipment</u> .....	<u>28</u>
<u>A.3.1 Diver Depth Gauges</u> .....	<u>28</u>
<u>A.3.2 Lead Lines</u> .....	<u>28</u>
<u>A.3.3 Sounding Poles</u> .....	<u>29</u>
<u>A.3.4 Other Manual Sounding Equipment</u> .....	<u>29</u>
<u>A.4 Positioning and Attitude Equipment</u> .....	<u>29</u>
<u>A.4.1 Applanix POS/MV</u> .....	<u>29</u>
<u>A.4.2 DGPS</u> .....	<u>32</u>
<u>A.4.3 Trimble Backpacks</u> .....	<u>33</u>
<u>A.4.4 Laser Rangefinders</u> .....	<u>36</u>
<u>A.4.5 Other Positioning and Attitude Equipment</u> .....	<u>36</u>
<u>A.5 Sound Speed Equipment</u> .....	<u>36</u>
<u>A.5.1 Sound Speed Profiles</u> .....	<u>37</u>
<u>A.5.1.1 CTD Profilers</u> .....	<u>37</u>
<u>A.5.1.1.1 SEA-BIRD ELECTRONICS, INC. SBE 19 SEACAT</u> .....	<u>37</u>
<u>A.5.1.1.2 SEA-BIRD ELECTRONICS, INC. SBE 19plus SEACAT</u> .....	<u>40</u>
<u>A.5.1.2 Sound Speed Profilers</u> .....	<u>43</u>
<u>A.5.1.2.1 Rolls-Royce Group ODIM Brooke Ocean MVP200 Moving Vessel Profiler (MVP)</u> .....	<u>43</u>
<u>A.5.1.2.2 Rolls-Royce Group ODIM Brooke Ocean MVP30 Moving Vessel Profiler (MVP)</u> .....	<u>45</u>

A.5.2 Surface Sound Speed .....	47
A.5.2.1 Reson Inc. SVP 70 .....	47
A.5.2.2 Reson Inc. SVP 71 .....	48
A.5.2.3 Odom Hydrographic Systems Digibar Pro, model DB1200 .....	49
A.6 Horizontal and Vertical Control Equipment .....	50
A.6.1 Horizontal Control Equipment .....	50
A.6.1.1 Base Station Equipment .....	50
A.6.1.2 Rover Equipment .....	53
A.6.2 Vertical Control Equipment .....	53
A.6.2.1 Water Level Gauges .....	54
A.6.2.2 Leveling Equipment .....	58
A.7 Computer Hardware and Software .....	60
A.7.1 Computer Hardware .....	60
A.7.2 Computer Software .....	90
A.8 Bottom Sampling Equipment .....	95
A.8.1 Bottom Samplers .....	95
A.8.1.1 Unknown Unknown, but referred to as the “Nibbler” .....	95
A.8.1.2 AMS, Inc. 15 lb SST Dredge #445.10 .....	96
B Quality Control .....	97
B.1 Data Acquisition .....	97
B.1.1 Bathymetry .....	97
B.1.2 Imagery .....	102
B.1.3 Sound Speed .....	103
B.1.4 Horizontal and Vertical Control .....	105
B.1.5 Feature Verification .....	110
B.1.6 Bottom Sampling .....	116
B.1.7 Backscatter .....	116
B.1.8 Other .....	117
B.2 Data Processing .....	117
B.2.1 Bathymetry .....	117
B.2.2 Imagery .....	121
B.2.3 Sound Speed .....	122
B.2.4 Horizontal and Vertical Control .....	124
B.2.5 Feature Verification .....	128
B.2.6 Backscatter .....	129
B.2.7 Other .....	130
B.3 Quality Management .....	130
B.4 Uncertainty and Error Management .....	132
B.4.1 Total Propagated Uncertainty (TPU) .....	134

<u>B.4.2 Deviations</u> .....	<u>141</u>
<u>C Corrections To Echo Soundings</u> .....	<u>141</u>
<u>C.1 Vessel Offsets and Layback</u> .....	<u>141</u>
<u>C.1.1 Vessel Offsets</u> .....	<u>141</u>
<u>C.1.2 Layback</u> .....	<u>147</u>
<u>C.2 Static and Dynamic Draft</u> .....	<u>147</u>
<u>C.2.1 Static Draft</u> .....	<u>147</u>
<u>C.2.2 Dynamic Draft</u> .....	<u>147</u>
<u>C.3 System Alignment</u> .....	<u>151</u>
<u>C.4 Positioning and Attitude</u> .....	<u>157</u>
<u>C.5 Tides and Water Levels</u> .....	<u>158</u>
<u>C.6 Sound Speed</u> .....	<u>160</u>
<u>C.6.1 Sound Speed Profiles</u> .....	<u>160</u>
<u>C.6.2 Surface Sound Speed</u> .....	<u>161</u>

## Data Acquisition and Processing Report

### NOAA Ship *Rainier*

Chief of Party: CDR Richard T. Brennan / CDR Edward J. Van Den Ameele

Year: 2014

Version: 14.423

Publish Date: 2015-02-03

## A Equipment

### A.1 Survey Vessels

#### A.1.1 NOAA Ship *Rainier* (WTEF)

<i>Name</i>	NOAA Ship <i>Rainier</i> (WTEF)	
<i>Hull Number</i>	S221	
<i>Description</i>	Steel hydrographic ship	
<i>Utilization</i>	Mid-water multibeam	
<i>Dimensions</i>	<i>LOA</i>	70.4 meters
	<i>Beam</i>	12.8 meters
	<i>Max Draft</i>	4.7 meters
<i>Most Recent Full Static Survey</i>	<i>Date</i>	2014-02-13
	<i>Performed By</i>	The IMTEC Group, Ltd.
	<i>Discussion</i>	During the <i>Rainier</i> 's 2014 dry-dock period, in conjunction with the installation of the new ice hardened transducers for the Kongsberg EM 710 multibeam system, the IMTEC Group, Ltd. was contracted to conduct a sensor alignment and orthogonal coordinate survey report. The spatial relationship between the ship's granite block, IMU, transducer array, POS/MV antennae, and multiple ship reference points were all determined.
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	
<i>Most Recent Partial Offset Verification</i>	Partial offset verification was not performed.	

<i>Most Recent Static Draft Determination</i>	<i>Date</i>	2014-02-01
	<i>Method Used</i>	Survey personnel record direct measurements to waterline from port and starboard benchmarks.
	<i>Discussion</i>	<p>During her 2014 dry-dock in Lake Union, Rainier had a new ice hardened transducer installed for her multibeam sonar system. As part of this installation, The IMTEC Group, Ltd. performed a survey of the entire sonar system in relation to the ship's granite block and several benchmarks located about the ship. This survey included two benchmarks positioned to facilitate waterline measurements.</p> <p>These two benchmarks are located on the gunwale lip, both port and starboard, close to in-line with the IMU. Prior to any multibeam data collection with the ship, an Impulse 200 LR laser rangefinder is held level to the gunwale lip directly on the benchmark and distance shots are taken directly to the surface of the water. Six measurements are taken from each benchmark. Both the port and starboard measurements are individually averaged together to derive a final value.</p> <p>A new waterline measurement is acquired prior to every day of survey operation and when a significant change to the draft occurs (ex; dropping the launches). See section C.2.1 of this report for information regarding the use of waterline measurements in data processing.</p>
<i>Most Recent Dynamic Draft Determination</i>	<i>Date</i>	2014-07-24
	<i>Method Used</i>	The ellipsoidally referenced method
	<i>Discussion</i>	The Ellipsoidally Referenced Dynamic Draft Measurement (ERDDM) methodology as outlined in the FPM (1.4.2.1.2.1—Dynamic Draft Measurement Techniques) was used to determine the settlement and squat values of Rainier. Continuously Operating Reference Stations (CORS) were used as reference stations, no GPS base stations were installed by Rainier.



*Figure 1: NOAA Ship Rainier S221 (WTEF)*

### **A.1.2 RA3 (WZ2573)**

<i>Name</i>	RA3 (WZ2573)	
<i>Hull Number</i>	2803	
<i>Description</i>	Aluminum hull Jensen survey launch	
<i>Utilization</i>	Shallow water multibeam	
<i>Dimensions</i>	<i>LOA</i>	8.8 meters
	<i>Beam</i>	3.7 meters
	<i>Max Draft</i>	1.1 meters

<i>Most Recent Full Static Survey</i>	<i>Date</i>	2009-03-01
	<i>Performed By</i>	National Geodetic Survey, Geodetic Services Division Instrumentation & Methodologies Branch
	<i>Discussion</i>	<p>During the 2008-2009 winter inport a brand new Jensen (2803) launch was constructed and delivered to Rainier. Personnel from the National Geodetic Survey's Geodetic Services Division determined the spatial relationship of various sensors and reference points in relation to the POS/MV IMU.</p> <p>In all, seven benchmarks in strategic places around the hull, two GPS antennae, and the IMU were positioned.</p>
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	
<i>Most Recent Partial Offset Verification</i>	<i>Date</i>	2014-03-07
	<i>Method Used</i>	Total Station
	<i>Discussion</i>	<p>During the 2014 Rainier dry-dock period, four of her launches were removed from the water and placed on stilts at the NOAA facility at Sand Point. This presented an opportunity to verify launch offsets using both a total station and 3D laser scanner.</p> <p>A total station is an instrument that combines functions of an electronic theodolite with an electronic distance measuring instrument (EDMI). The instrument can be used to measure horizontal and vertical angles as well as slope distances from the instrument to a particular point of interest. These measurements allow for the computation of all the three coordinates (X, Y, and Z) for the observed points. For the offset check of Rainier's launches, reflective stickers were used to define some points on such as the waterline.</p> <p>A 3D laser scanner is an instrument that fires a laser in systematic sweeps until it has a complete picture of the 3D space round it. This is accomplished by having the entire instrument rotate horizontally while a rotating mirror directs the laser vertically. The laser beam measures the distance to the first object on its path. By processing the horizontal and vertical angles as well as slope distances, a point cloud is produced. By producing a point cloud of a survey launch addition analysis of offsets is feasible.</p>



<i>Most Recent Static Draft Determination</i>	<i>Date</i>	2014-07-25
	<i>Method Used</i>	Static draft determined by direct measurement of the distance between launch benchmarks and the waterline.
	<i>Discussion</i>	<p>All Rainier survey launches were constructed with integrated benchmarks that were later surveyed by the National Geodetic Survey, Geodetic Services Division Instrumentation &amp; Methodologies Branch. Two of these benchmarks are located on the deck, both port and starboard, close to in-line with the IMU. While each launch was in the water, a reflective sticker was placed on the hull at the waterline in-line with these deck benchmarks.</p> <p>During the static draft determination process, a total station measured the X, Y, and Z coordinates of these stickers placed at the waterline in addition to positions of permanent benchmarks built into the launch. With this information it was elementary to solve for the waterline measurement required in the CARIS HVF. In practice it was found that the waterline values measured in 2014 nearly matched those found in 2013, so the 2013 values were retained.</p>
<i>Most Recent Dynamic Draft Determination</i>	<i>Date</i>	2014-05-08
	<i>Method Used</i>	Dynamic draft determined by the ellipsoidally referenced method
	<i>Discussion</i>	<p>The ellipsoidally referenced dynamic draft measurement method utilized by Rainier followed the procedure as outlined in section 1.4.2.1.2.1 of the FPM. The launch was run with a constant line heading while speed was increased in two-knot increments from clutch ahead to fourteen knots in two-minute intervals. A five minute rest period was placed between the runs. POSPac data was recorded as soon as the system was brought up and throughout the entire duration of the dynamic draft measurement.</p> <p>Following acquisition, the POSPac data recorded by the POS/MV was imported into the POSPac MMS software suite and processed using Single Base processing. Continuously Operating Reference Stations (CORS) were used as reference stations, no GPS base stations were installed by Rainier. The resulting SBET was exported as an ASCII file, which was processed using the Pydro macro ProcSBETDynamicDraft.py as detailed in the NOAA Ellipsoidally Referenced Survey (ERS) SOP in the chapter 4 of the FPM appendices to produce delta draft vs. speed curves. Dynamic draft curves and delta draft value tables were then generated and entered into the CARIS dynamic draft table.</p>



Figure 2: Rainier survey launch RA3 (2803)

### A.1.3 RA4 (WZ2574)

<i>Name</i>	RA4 (WZ2574)	
<i>Hull Number</i>	2801	
<i>Description</i>	Aluminum hull Jensen survey launch	
<i>Utilization</i>	Shallow water multibeam	
<i>Dimensions</i>	<i>LOA</i>	8.8 meters
	<i>Beam</i>	3.7 meters
	<i>Max Draft</i>	1.1 meters

<i>Most Recent Full Static Survey</i>	<i>Date</i>	2008-03-31
	<i>Performed By</i>	National Geodetic Survey, Geodetic Services Division Instrumentation & Methodologies Branch
	<i>Discussion</i>	<p>During the 2007-2008 winter inport, a brand new Jensen (2801) launch was constructed and delivered to Rainier. Personnel from the National Geodetic Survey's Geodetic Services Division determined the spatial relationship of various sensors and reference points in relation to the POS/MV IMU.</p> <p>Two of the eleven benchmarks located by NGS personnel are positioned on the sonar mounting bracket which was built to precise dimensional standards. These two benchmarks and blueprints of the mounting bracket allowed for the determination of the exact orientation of the Reson 7125 sonar projectors once they were mounted.</p>
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	

<i>Most Recent Partial Offset Verification</i>	<i>Date</i>	2014-03-05
	<i>Method Used</i>	Total Station
	<i>Discussion</i>	<p>During the 2014 Rainier dry-dock period, four of her launches were removed from the water and placed on stilts at the NOAA facility at Sand Point. This presented an opportunity to verify launch offsets using both a total station and 3D laser scanner.</p> <p>A total station is an instrument that combines functions of an electronic theodolite with an electronic distance measuring instrument (EDMI). The instrument can be used to measure horizontal and vertical angles as well as slope distances from the instrument to a particular point of interest. These measurements allow for the computation of all the three coordinates (X, Y, and Z) for the observed points. For the offset check of Rainier's launches, reflective stickers were used to define some points on such as the waterline.</p> <p>A 3D laser scanner is an instrument that fires a laser in systematic sweeps until it has a complete picture of the 3D space round it. This is accomplished by having the entire instrument rotate horizontally while a rotating mirror directs the laser vertically. The laser beam measures the distance to the first object on its path. By processing the horizontal and vertical angles as well as slope distances, a point cloud is produced. By producing a point cloud of a survey launch addition analysis of offsets is feasible.</p>
<i>Most Recent Static Draft Determination</i>	<i>Date</i>	2014-07-25
	<i>Method Used</i>	Static draft determined by direct measurement of the distance between launch benchmarks and the waterline.
	<i>Discussion</i>	<p>All Rainier survey launches were constructed with integrated benchmarks that were later surveyed by the National Geodetic Survey, Geodetic Services Division Instrumentation &amp; Methodologies Branch. Two of these benchmarks are located on the deck, both port and starboard, close to in-line with the IMU. While each launch was in the water, a reflective sticker was placed on the hull at the waterline in-line with these deck benchmarks.</p> <p>During the static draft determination process, a total station measured the X, Y, and Z coordinates of these stickers placed at the waterline in addition to positions of permanent benchmarks built into the launch. With this information it was elementary to solve for the waterline measurement required in the CARIS HVF. In practice it was found that the waterline values measured in 2014 nearly matched those found in 2013, so the 2013 values were retained.</p>

<i>Most Recent Dynamic Draft Determination</i>	<i>Date</i>	2014-05-08
	<i>Method Used</i>	Dynamic draft determined by the ellipsoidally referenced method
	<i>Discussion</i>	<p>The ellipsoidally referenced dynamic draft measurement method utilized by Rainier followed the procedure as outlined in section 1.4.2.1.2.1 of the FPM. The launch was run with a constant line heading while speed was increased in two-knot increments from clutch ahead to fourteen knots in two-minute intervals. A five minute rest period was placed between the runs. POSPac data was recorded as soon as the system was brought up and throughout the entire duration of the dynamic draft measurement.</p> <p>Following acquisition, the POSPac data recorded by the POS/MV was imported into the POSPac MMS software suite and processed using Single Base processing. Continuously Operating Reference Stations (CORS) were used as reference stations, no GPS base stations were installed by Rainier. The resulting SBET was exported as an ASCII file, which was processed using the Pydro macro ProcSBETDynamicDraft.py as detailed in the NOAA Ellipsoidally Referenced Survey (ERS) SOP in the chapter 4 of the FPM appendices to produce delta draft vs. speed curves. Dynamic draft curves and delta draft value tables were then generated and entered into the CARIS dynamic draft table.</p>



*Figure 3: Rainier survey launch RA4 (2801) conducting dive operations*

#### **A.1.4 RA5 (WZ2575)**

<i>Name</i>	RA5 (WZ2575)	
<i>Hull Number</i>	2802	
<i>Description</i>	Aluminum hull Jensen survey launch	
<i>Utilization</i>	Shallow water multibeam	
<i>Dimensions</i>	<i>LOA</i>	8.8 meters
	<i>Beam</i>	3.7 meters
	<i>Max Draft</i>	1.1 meters

<i>Most Recent Full Static Survey</i>	<i>Date</i>	2008-03-31
	<i>Performed By</i>	National Geodetic Survey, Geodetic Services Division Instrumentation & Methodologies Branch
	<i>Discussion</i>	<p>During the 2007-2008 winter import, a brand new Jensen (2802) launch was constructed and delivered to Rainier. Personnel from the National Geodetic Survey's Geodetic Services Division determined the spatial relationship of various sensors and reference points in relation to the POS/MV IMU.</p> <p>Two of the eleven benchmarks located by NGS personnel are positioned on the sonar mounting bracket which was built to precise dimensional standards. These two benchmarks and blueprints of the mounting bracket allowed for the determination of the exact orientation of the Reson 7125 sonar projectors once they were mounted.</p>
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	

<i>Most Recent Partial Offset Verification</i>	<i>Date</i>	2014-03-04
	<i>Method Used</i>	Total Station
	<i>Discussion</i>	<p>During the 2014 Rainier dry-dock period, four of her launches were removed from the water and placed on stilts at the NOAA facility at Sand Point. This presented an opportunity to verify launch offsets using both a total station and 3D laser scanner.</p> <p>A total station is an instrument that combines functions of an electronic theodolite with an electronic distance measuring instrument (EDMI). The instrument can be used to measure horizontal and vertical angles as well as slope distances from the instrument to a particular point of interest. These measurements allow for the computation of all the three coordinates (X, Y, and Z) for the observed points. For the offset check of Rainier's launches, reflective stickers were used to define some points on such as the waterline.</p> <p>A 3D laser scanner is an instrument that fires a laser in systematic sweeps until it has a complete picture of the 3D space round it. This is accomplished by having the entire instrument rotate horizontally while a rotating mirror directs the laser vertically. The laser beam measures the distance to the first object on its path. By processing the horizontal and vertical angles as well as slope distances, a point cloud is produced. By producing a point cloud of a survey launch addition analysis of offsets is feasible.</p>
<i>Most Recent Static Draft Determination</i>	<i>Date</i>	2014-07-25
	<i>Method Used</i>	Static draft determined by direct measurement of the distance between launch benchmarks and the waterline.
	<i>Discussion</i>	<p>All Rainier survey launches were constructed with integrated benchmarks that were later surveyed by the National Geodetic Survey, Geodetic Services Division Instrumentation &amp; Methodologies Branch. Two of these benchmarks are located on the deck, both port and starboard, close to in-line with the IMU. While each launch was in the water, a reflective sticker was placed on the hull at the waterline in-line with these deck benchmarks.</p> <p>During the static draft determination process, a total station measured the X, Y, and Z coordinates of these stickers placed at the waterline in addition to positions of permanent benchmarks built into the launch. With this information it was elementary to solve for the waterline measurement required in the CARIS HVF. In practice it was found that the waterline values measured in 2014 nearly matched those found in 2013, so the 2013 values were retained.</p>



<i>Most Recent Dynamic Draft Determination</i>	<i>Date</i>	2014-05-07
	<i>Method Used</i>	Dynamic draft determined by the ellipsoidally referenced method
	<i>Discussion</i>	<p>The ellipsoidally referenced dynamic draft measurement method utilized by Rainier followed the procedure as outlined in section 1.4.2.1.2.1 of the FPM. The launch was run with a constant line heading while speed was increased in two-knot increments from clutch ahead to fourteen knots in two-minute intervals. A five minute rest period was placed between the runs. POSPac data was recorded as soon as the system was brought up and throughout the entire duration of the dynamic draft measurement.</p> <p>Following acquisition, the POSPac data recorded by the POS/MV was imported into the POSPac MMS software suite and processed using Single Base processing. Continuously Operating Reference Stations (CORS) were used as reference stations, no GPS base stations were installed by Rainier. The resulting SBET was exported as an ASCII file, which was processed using the Pydro macro ProcSBETDynamicDraft.py as detailed in the NOAA Ellipsoidally Referenced Survey (ERS) SOP in the chapter 4 of the FPM appendices to produce delta draft vs. speed curves. Dynamic draft curves and delta draft value tables were then generated and entered into the CARIS dynamic draft table.</p>



*Figure 4: Rainier survey launch RA5 (2802)*

### **A.1.5 RA6 (WZ2576)**

<i>Name</i>	RA6 (WZ2576)	
<i>Hull Number</i>	2804	
<i>Description</i>	Aluminum hull Jensen survey launch	
<i>Utilization</i>	Shallow water multibeam	
<i>Dimensions</i>	<i>LOA</i>	8.8 meters
	<i>Beam</i>	3.7 meters
	<i>Max Draft</i>	1.1 meters

<i>Most Recent Full Static Survey</i>	<i>Date</i>	2009-03-01
	<i>Performed By</i>	National Geodetic Survey, Geodetic Services Division Instrumentation & Methodologies Branch
	<i>Discussion</i>	<p>During the 2008-2009 winter inport a brand new Jensen (2804) launch was constructed and delivered to Rainier. Personnel from the National Geodetic Survey's Geodetic Services Division determined the spatial relationship of various sensors and reference points in relation to the POS/MV IMU.</p> <p>In all, seven benchmarks in strategic places around the hull, two GPS antennae, and the IMU were positioned.</p>
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	
<i>Most Recent Partial Offset Verification</i>	<i>Date</i>	2014-03-04
	<i>Method Used</i>	Total Station
	<i>Discussion</i>	<p>During the 2014 Rainier dry-dock period, four of her launches were removed from the water and placed on stilts at the NOAA facility at Sand Point. This presented an opportunity to verify launch offsets using both a total station and 3D laser scanner.</p> <p>A total station is an instrument that combines functions of an electronic theodolite with an electronic distance measuring instrument (EDMI). The instrument can be used to measure horizontal and vertical angles as well as slope distances from the instrument to a particular point of interest. These measurements allow for the computation of all the three coordinates (X, Y, and Z) for the observed points. For the offset check of Rainier's launches, reflective stickers were used to define some points on such as the waterline.</p> <p>A 3D laser scanner is an instrument that fires a laser in systematic sweeps until it has a complete picture of the 3D space round it. This is accomplished by having the entire instrument rotate horizontally while a rotating mirror directs the laser vertically. The laser beam measures the distance to the first object on its path. By processing the horizontal and vertical angles as well as slope distances, a point cloud is produced. By producing a point cloud of a survey launch addition analysis of offsets is feasible.</p>

<i>Most Recent Static Draft Determination</i>	<i>Date</i>	2014-07-25
	<i>Method Used</i>	Static draft determined by direct measurement of the distance between launch benchmarks and the waterline.
	<i>Discussion</i>	<p>All Rainier survey launches were constructed with integrated benchmarks that were later surveyed by the National Geodetic Survey, Geodetic Services Division Instrumentation &amp; Methodologies Branch. Two of these benchmarks are located on the deck, both port and starboard, close to in-line with the IMU. While each launch was in the water, a reflective sticker was placed on the hull at the waterline in-line with these deck benchmarks.</p> <p>During the static draft determination process, a total station measured the X, Y, and Z coordinates of these stickers placed at the waterline in addition to positions of permanent benchmarks built into the launch. With this information it was elementary to solve for the waterline measurement required in the CARIS HVF. In practice it was found that the waterline values measured in 2014 nearly matched those found in 2013, so the 2013 values were retained.</p>
<i>Most Recent Dynamic Draft Determination</i>	<i>Date</i>	2014-05-07
	<i>Method Used</i>	Dynamic draft determined by the ellipsoidally referenced method
	<i>Discussion</i>	<p>The ellipsoidally referenced dynamic draft measurement method utilized by Rainier followed the procedure as outlined in section 1.4.2.1.2.1 of the FPM. The launch was run with a constant line heading while speed was increased in two-knot increments from clutch ahead to fourteen knots in two-minute intervals. A five minute rest period was placed between the runs. POSPac data was recorded as soon as the system was brought up and throughout the entire duration of the dynamic draft measurement.</p> <p>Following acquisition, the POSPac data recorded by the POS/MV was imported into the POSPac MMS software suite and processed using Single Base processing. Continuously Operating Reference Stations (CORS) were used as reference stations, no GPS base stations were installed by Rainier. The resulting SBET was exported as an ASCII file, which was processed using the Pydro macro ProcSBETDynamicDraft.py as detailed in the NOAA Ellipsoidally Referenced Survey (ERS) SOP in the chapter 4 of the FPM appendices to produce delta draft vs. speed curves. Dynamic draft curves and delta draft value tables were then generated and entered into the CARIS dynamic draft table.</p>



*Figure 5: Rainier survey launch RA6 (2804)*

### **A.1.6 RA7**

<i>Name</i>	RA7	
<i>Hull Number</i>	1906	
<i>Description</i>	Aluminum hull SAFE boat survey skiff	
<i>Utilization</i>	Shoreline verification	
<i>Dimensions</i>	<i>LOA</i>	5.8 meters
	<i>Beam</i>	2.6 meters
	<i>Max Draft</i>	0.33 meters
<i>Most Recent Full Static Survey</i>	Full static survey was not performed.	
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	

<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.
<i>Most Recent Partial Offset Verification</i>	Partial offset verification was not performed.
<i>Most Recent Static Draft Determination</i>	Static draft determination was not performed.
<i>Most Recent Dynamic Draft Determination</i>	Dynamic draft determination was not performed.



*Figure 6: Rainier survey skiff RA7 (1906)*

### **A.1.7 RA8**

<i>Name</i>	RA8
<i>Hull Number</i>	1905

<i>Description</i>	Aluminum hull SeaArk survey skiff	
<i>Utilization</i>	Shoreline verification	
<i>Dimensions</i>	<i>LOA</i>	5.7 meters
	<i>Beam</i>	2.8 meters
	<i>Max Draft</i>	0.35 meters
<i>Most Recent Full Static Survey</i>	Full static survey was not performed.	
<i>Most Recent Partial Static Survey</i>	Partial static survey was not performed.	
<i>Most Recent Full Offset Verification</i>	Full offset verification was not performed.	
<i>Most Recent Partial Offset Verification</i>	Partial offset verification was not performed.	
<i>Most Recent Static Draft Determination</i>	Static draft determination was not performed.	
<i>Most Recent Dynamic Draft Determination</i>	Dynamic draft determination was not performed.	



*Figure 7: Rainier survey skiff RA8 (1905)*

## **A.2 Echo Sounding Equipment**

### **A.2.1 Side Scan Sonars**

No side scan sonars were utilized for data acquisition.

### **A.2.2 Multibeam Echosounders**

#### **A.2.2.1 Kongsberg EM710**



<i>Manufacturer</i>	Kongsberg			
<i>Model</i>	EM710			
<i>Description</i>	<p>S221 (Rainier) is equipped with a hull-mounted Kongsberg EM 710, which operates at sonar frequencies in the 70 to 100 kHz range. The across-track swath width is up to 5.5 times water depth with a published maximum depth of more than 2000 m. The alongtrack beamwidth of Rainier's configuration is <math>\frac{1}{2}^\circ</math> with a receive beamwidth of <math>1^\circ</math>. The number of beams is 256 or 128 respectively, with dynamic focusing employed in the near field. A high density beam processing mode provides up to 400 or 200 soundings per swath by using a limited range window for the detections. The beamspacing may be set to be either equiangular or equidistant. Rainier typically collects 400 beams per ping in equidistant mode.</p> <p>The transmit fan is divided into three sectors to maximize range capability but also to suppress interference from multiples of strong bottom echoes. The sectors are transmitted sequentially within each ping, and use distinct frequencies or waveforms. By default, the transmit fan is electronically stabilized for roll, pitch and yaw but Rainier experience has shown that yaw stabilization often caused a noticeable "step" between the three sectors of the transmit fan. Due to this problem, Rainier typically disables yaw stabilization.</p>			
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221		
	<i>Processor s/n</i>	0356		
	<i>Transceiver s/n</i>	unknown		
	<i>Transducer s/n</i>	unknown		
	<i>Receiver s/n</i>	218		
	<i>Projector 1 s/n</i>	unknown		
	<i>Projector 2 s/n</i>	none		
<i>Specifications</i>	<i>Frequency</i>	100 kilohertz		
	<i>Beamwidth</i>	<i>Along Track</i>	0.5 degrees	
		<i>Across Track</i>	1.0 degrees	
	<i>Max Ping Rate</i>	25 hertz		
	<i>Beam Spacing</i>	<i>Beam Spacing Mode</i>	Equidistant	
		<i>Number of Beams</i>	400	
	<i>Max Swath Width</i>	140 degrees		
	<i>Depth Resolution</i>	1 centimeters		
<i>Depth Rating</i>	<i>Manufacturer Specified</i>	2000 meters		
	<i>Ship Usage</i>	400 meters		
<i>Manufacturer Calibrations</i>	Manufacturer calibration was not performed.			

<i>System Accuracy Tests</i>	System accuracy test was not performed.
<i>Snippets</i>	Sonar does not have snippets logging capability.



*Figure 8: Kongsberg EM710 sonar transducer housing on Rainier (S221).*

#### **A.2.2.2 Reson SeaBat 7125-B**

<i>Manufacturer</i>	Reson
<i>Model</i>	SeaBat 7125-B
<i>Description</i>	The Reson SeaBat 7125-B is a dual frequency (200/400 kHz), high-resolution multibeam echo sounder system for shallow-water depths. The recommended maximum range at 200kHz is 500m resulting in a 220 m depth limit for full swath coverage on a flat bottom. The 400kHz setting maximum range is 200m resulting

in a 87m depth limit for full swath coverage on a flat bottom. The transducer assembly consists of single flat-faced receiver array and two projectors, one for each frequency. These systems included the optional Reson SVP 71 surface sound velocity probe.

The SeaBat 7125 measures water depths across a 128° swath in both high and low frequency. Beamforming is conducted in either equi-angle or equidistant mode. Equidistant mode is useful to produce soundings at a uniform distance apart across the entire swath-width of a ping at the cost of less sounding density near nadir. Equi-angle mode is good for maximum ensonification of the bottom directly under the launch at the cost of sparse sounding density in the outer beams. Rainier launches typically acquire data in equidistant mode unless running development lines directly over a feature of interest.

In the 200kHz mode the system has a beamwidth of 1° x 2° and in the 400kHz mode has a beamwidth of 0.5° x 1°. At 200kHz, the SeaBat 7125 generates 256 beams per ping. At 400kHz, the system generates 256 or 512 beams per ping. Typical settings used aboard Rainier are 256 beams, equidistant in low frequency mode and 512 beams, equidistant in high frequency mode.

<i>Serial Numbers</i>	<i>Vessel Installed On</i>	2801	2803		
	<i>Processor s/n</i>	4707073	708007		
	<i>Transceiver s/n</i>	1515002	151033		
	<i>Transducer s/n</i>	n/a	n/a		
	<i>Receiver s/n</i>	208058	5006315		
	<i>Projector 1 s/n</i>	unknown	0608560		
	<i>Projector 2 s/n</i>	unknown	0908167		
<i>Specifications</i>	<i>Frequency</i>	200 kilohertz		400 kilohertz	
	<i>Beamwidth</i>	<i>Along Track</i>	2.0 degrees	<i>Along Track</i>	1.0 degrees
		<i>Across Track</i>	1.0 degrees	<i>Across Track</i>	0.5 degrees
	<i>Max Ping Rate</i>	50 kilohertz		50 microseconds	
	<i>Beam Spacing</i>	<i>Beam Spacing Mode</i>	Equidistant	<i>Beam Spacing Mode</i>	Equidistant
		<i>Number of Beams</i>	256	<i>Number of Beams</i>	512
	<i>Max Swath Width</i>	128 degrees		128 degrees	
	<i>Depth Resolution</i>	5 millimeters		5 millimeters	
<i>Depth Rating</i>	<i>Manufacturer Specified</i>	500 meters	<i>Manufacturer Specified</i>	200 meters	
	<i>Ship Usage</i>	200 meters	<i>Ship Usage</i>	50 meters	
<i>Manufacturer Calibrations</i>	Manufacturer calibration was not performed.				

<i>System Accuracy Tests</i>	<i>Vessel Installed On</i>	2801 & 2803 (high and low frequency)
	<i>Methods</i>	The reference surface used in Whale Passage, Alaska is a grid of 3 lines by 3 lines with each line being roughly 150m apart. This spacing provides for a generous overlap of soundings. Reference surfaces were run for 7125 systems in both high (400 kHz) and low (200 kHz) frequency in equi-angle mode with each vessel. Reference surfaces of 1-meter CUBE surfaces were created for each system and frequency. All surfaces were initially referenced to MLLW but were later referenced to the ellipse to eliminate any potential tidal error. Because there is no known true value for this reference surface, the 2801 Reson 7125 high frequency reference surface was used as the “zero” datum for all comparisons.
	<i>Results</i>	See attached "Reference Surface Compare 2014" report.
<i>Snippets</i>	Sonar has snippets logging capability.	



*Figure 9: Reson SeaBat 7125-B mounted on survey launch 2801.*

### A.2.2.3 Reson SeaBat 7125 SV2

<i>Manufacturer</i>	Reson
---------------------	-------

<i>Model</i>	SeaBat 7125 SV2		
<i>Description</i>	<p>The Reson SeaBat 7125 SV2 is a dual frequency (200/400 kHz), high-resolution multibeam echo sounder system for shallow-water depths. The primary difference between this system and the earlier SeaBat 7125-B is the TC 2181 dual-frequency projector unit that operates at either 400 or 200kHz. This single projector replaces two separate projectors (200 &amp; 400 kHz) used in the SeaBat 7125-B. In addition, the functions of the Link Control Unit (LCU) have been entirely replaced by upgrades to the projector /receiver units and therefore the LCU bottle is no longer present in the SeaBat 7125 SV2.</p> <p>The recommended maximum range at 200kHz is 500m resulting in a 220 m depth limit for full swath coverage on a flat bottom. The 400kHz setting maximum range is 200m resulting in a 87m depth limit for full swath coverage on a flat bottom. The transducer assembly consists of single flat-faced receiver array and the TC 2181 projector mounted in a “T” configuration with the receiver perpendicular to the direction of travel. This system also includes the optional Reson SVP 71 surface sound velocity probe.</p> <p>The SeaBat 7125 SV2 measures water depths across a 128° swath in both high and low frequency. Beamforming is conducted in either equi-angle or equidistant mode. Equidistant mode is useful to produce soundings at a uniform distance apart across the entire swath-width of a ping at the cost of less sounding density near nadir. Equi-angle mode is good for maximum ensonification of the bottom directly under the launch at the cost of sparse sounding density in the outer beams. Rainier launches typically acquire data in equidistant mode unless running development lines directly over a feature of interest.</p> <p>In the 200kHz mode the system has a beamwidth of 1° x 2° and in the 400kHz mode has a beamwidth of 0.5° x 1°. At 200kHz, the SeaBat 7125 generates 256 beams per ping. At 400kHz, the system generates 256 or 512 beams per ping. Typical settings used aboard Rainier are 256 beams, equidistant in low frequency mode and 512 beams, equidistant in high frequency mode.</p>		
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	2802	2804
	<i>Processor s/n</i>	18343413083	18343513086
	<i>Transceiver s/n</i>	n/a	n/a
	<i>Transducer s/n</i>	n/a	n/a
	<i>Receiver s/n</i>	1513556	1513564
	<i>Projector 1 s/n</i>	4912146	2413037
	<i>Projector 2 s/n</i>	None	None

<i>Specifications</i>	<i>Frequency</i>	200 kilohertz		400 kilohertz	
	<i>Beamwidth</i>	<i>Along Track</i>	2.0 degrees	<i>Along Track</i>	1.0 degrees
		<i>Across Track</i>	1.0 degrees	<i>Across Track</i>	0.5 degrees
	<i>Max Ping Rate</i>	50 hertz		50 hertz	
	<i>Beam Spacing</i>	<i>Beam Spacing Mode</i>	Equidistant	<i>Beam Spacing Mode</i>	Equidistant
		<i>Number of Beams</i>	256	<i>Number of Beams</i>	512
	<i>Max Swath Width</i>	140 degrees		140 degrees	
	<i>Depth Resolution</i>	6 millimeters		6 millimeters	
<i>Depth Rating</i>	<i>Manufacturer Specified</i>	450 meters	<i>Manufacturer Specified</i>	175 meters	
	<i>Ship Usage</i>	200 meters	<i>Ship Usage</i>	50 meters	
<i>Manufacturer Calibrations</i>	Manufacturer calibration was not performed.				
<i>System Accuracy Tests</i>	<i>Vessel Installed On</i>	2802 & 2804 (high and low frequency)			
	<i>Methods</i>	The reference surface used in Whale Passage, Alaska is a grid of 3 lines by 3 lines with each line being roughly 150m apart. This spacing provides for a generous overlap of soundings. Reference surfaces were run for 7125 systems in both high (400 kHz) and low (200 kHz) frequency in equi-angle mode with each vessel. Reference surfaces of 1-meter CUBE surfaces were created for each system and frequency. All surfaces were initially referenced to MLLW but were later referenced to the ellipse to eliminate any potential tidal error. Because there is no known true value for this reference surface, the 2801 Reson 7125 high frequency reference surface was used as the "zero" datum for all comparisons.			
	<i>Results</i>	See attached "Reference Surface Compare 2014" report.			
<i>Snippets</i>	Sonar has snippets logging capability.				



*Figure 10: Reson SeaBat 7125 SV2 mounted on survey launch 2804.*

### **A.2.3 Single Beam Echosounders**

No single beam echosounders were utilized for data acquisition.

### **A.2.4 Phase Measuring Bathymetric Sonars**

No phase measuring bathymetric sonars were utilized for data acquisition.

### **A.2.5 Other Echosounders**

No additional echosounders were utilized for data acquisition.

### A.3 Manual Sounding Equipment

#### A.3.1 Diver Depth Gauges

No diver depth gauges were utilized for data acquisition.

#### A.3.2 Lead Lines

<i>Manufacturer</i>	n/a									
<i>Model</i>	n/a									
<i>Description</i>	<p>Despite the tremendous advances in hydrographic sonar technology, the hydrographer may occasionally require a direct measurement of water depth. To this end, a calibrated lead line is still essential for field parties. The Field Procedures Manual (FPM) states: “All field units engaged in hydrographic surveys where general depths are less than 40 meters shall have one or more lead lines marked and calibrated.”</p> <p>During shoreline verification, lead lines were used to acquire depths over rocks and other features too shallow to acquire soundings using echo sounders. Of Rainier’s leadlines, currently three are marked well-enough to meet specifications while six failed.</p>									
<i>Serial Numbers</i>	<table border="1"> <tr><td>LL_01 PASSED</td></tr> <tr><td>LL_02 FAILED</td></tr> <tr><td>LL_03 FAILED</td></tr> <tr><td>LL_04 PASSED</td></tr> <tr><td>LL_06 FAILED</td></tr> <tr><td>RA-203 PASSED</td></tr> <tr><td>RA-107 FAILED</td></tr> <tr><td>RA-6S FAILED</td></tr> <tr><td>RA-201 FAILED</td></tr> </table>	LL_01 PASSED	LL_02 FAILED	LL_03 FAILED	LL_04 PASSED	LL_06 FAILED	RA-203 PASSED	RA-107 FAILED	RA-6S FAILED	RA-201 FAILED
LL_01 PASSED										
LL_02 FAILED										
LL_03 FAILED										
LL_04 PASSED										
LL_06 FAILED										
RA-203 PASSED										
RA-107 FAILED										
RA-6S FAILED										
RA-201 FAILED										



<i>Calibrations</i>	<i>Serial Number</i>	ALL Lead Lines
	<i>Date</i>	2014-04-22
	<i>Procedures</i>	Prior to calibration, lead lines were soaked in fresh water for at least 60 minutes. Each lead line was laid out in a parking lot across the street from Lake Union Drydock in Seattle. During calibration the end of the lead line was secured to a steel survey measuring tape. Offsets were recorded by applying tension equal to the attached weight at the end of each line and recording the measurement.
<i>Accuracy Checks</i>	No accuracy checks were performed.	
<i>Correctors</i>	Correctors were not determined.	
<i>Non-Standard Procedures</i>	Non-standard procedures were not utilized.	

### A.3.3 Sounding Poles

No sounding poles were utilized for data acquisition.

### A.3.4 Other Manual Sounding Equipment

No additional manual sounding equipment was utilized for data acquisition.

## A.4 Positioning and Attitude Equipment

### A.4.1 Applanix POS/MV

<i>Manufacturer</i>	Applanix
<i>Model</i>	POS/MV 320 (version 4)
<i>Description</i>	<p>Rainier, and all of her launches, are equipped with Applanix POS/MV 320 (version 4) Position and Orientation Sensors to measure and calculate position. The POS/MV is a GPS-aided inertial navigation system, which provides a blended position solution derived from both an Inertial Motion Unit (IMU) and an integrated GPS receiver. The IMU and GPS receiver are complementary sensors, and data from one are used to filter and constrain errors from the other. This interdependence results in higher position accuracy and fewer errors.</p> <p>Position accuracy is displayed in real time by the POS/MV software and was monitored to ensure that positioning accuracy requirements as outlined in the NOS Hydrographic Surveys Specifications and Deliverables (HSSD) were not exceeded. In addition, the POS/MV software displays HDOP and the number of satellites used in position computation. Data acquisition was generally halted when an HDOP</p>

of 2.5 was exceeded or the number of satellites available dropped below four. However, because positional accuracy can be maintained by the POS/MV through short GPS outages with the help of the IMU, data acquisition was not halted during short periods of time when the HDOP and number of satellites used exceeded stated parameters.

In addition to position, the Applanix POS/MV also provides accurate navigation and attitude data to correct for the effects of heave, pitch, roll and heading. The POS/MV generates attitude data in three axes (roll, pitch and heading) to an accuracy of  $0.02^\circ$  or better. Heave measurements supplied by the POS/MV maintain an accuracy of 5% of the measured vertical displacement for movements that have a period of up to 20 seconds. The Heave Bandwidth filter was configured with a damping coefficient of 0.707. The cutoff period of the high pass filter was determined by estimating the swell period encountered on the survey grounds. These values ranged from 8 seconds (flat water) to 20 seconds (long period ocean swell), with values of 8 or 12 seconds typically. Currently the ship system is set to 20 seconds and the launches are set to 8 seconds.

Intermittent problems with the heading accuracy climbing above the ideal cutoff of  $0.05^\circ$  are observed. Heading accuracy is monitored by the launch crew and survey operations are temporarily suspended in the event that the error exceeds  $0.08^\circ$ .

Applanix "TrueHeave" values are also recorded. The TrueHeave algorithm uses a delayed filtering technique to eliminate many of the artifacts present in real time heave data. The TrueHeave data were applied to Reson bathymetry in CARIS HIPS post processing with the option "Load Delayed Heave".

Full POSpac data are also recorded on Rainier and all of her survey launches. These data are used to post process POS/MV data to produce superior position and attitude data and can be used to produce a Post-Processed Kinematic (PPK) GPS solution.

The POS Computer System (PCS) installed aboard Rainier has been upgraded to allow internal logging. Previously internal logging was not used with the ship's system due to IMU data gaps experienced by other field units attempting to use this feature. Although this problem has reportedly been fixed, Rainier continues to log RAW POS files directly to the acquisition computer since no issues have been noted using this method.

<i>PCS</i>	<i>Manufacturer</i>	Applanix					
	<i>Model</i>	POS/MV 320 V4					
	<i>Description</i>						
	<i>Firmware Version</i>	unknown					
	<i>Software Version</i>	4.3.4.0 (launches) 5.1.0.2 (S221)					
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221	2801	2802	2803	2804
<i>PCS s/n</i>		3643	2896	2893	2205	2206	
<i>IMU</i>	<i>Manufacturer</i>	Applanix					
	<i>Model</i>	POS/MV 320 V4					
	<i>Description</i>						
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221	2801	2802	2803	2804
		<i>IMU s/n</i>	353	693	694	334	355
<i>Certification</i>	IMU certification report was not produced.						
<i>Antennas</i>	<i>Manufacturer</i>	Trimble					
	<i>Model</i>	Zephyr Model 2 GNSS Antenna (P/N 57970-00)					
	<i>Description</i>	Used by S221					
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	<i>Antenna s/n</i>	<i>Port or Starboard</i>	<i>Primary or Secondary</i>		
		S221	1440925468	Starboard	Secondary		
		S221	1440925253	Port	Primary		
	<i>Manufacturer</i>	Trimble					
	<i>Model</i>	Zephyr L1/L2 (P/N 39105-00)					
	<i>Description</i>	Used by 2801 & 2802					
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	<i>Antenna s/n</i>	<i>Port or Starboard</i>	<i>Primary or Secondary</i>		
		2801	60216723	Starboard	Secondary		
2801		60216913	Port	Primary			
2802		60201133	Starboard	Secondary			
2802		60205688	Port	Secondary			
<i>Manufacturer</i>	Trimble						
<i>Model</i>	Zephyr L1/L2 (P/N 39105-00)						
<i>Description</i>	Used by 2803 & 2804						

	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	<i>Antenna s/n</i>	<i>Port or Starboard</i>	<i>Primary or Secondary</i>	
		2803	60073843	Starboard	Secondary	
		2803	60145259	Port	Primary	
		2804	60073826	Starboard	Secondary	
		2804	60078830	Port	Primary	
<i>GAMS Calibration</i>	<i>Vessel</i>	S221	2801	2802	2803	2804
	<i>Calibration Date</i>	2014-04-22	2014-07-14	2014-07-14	2014-07-14	2014-07-14
<i>Configuration Reports</i>	<i>Vessel</i>	S221	2801	2802	2803	2804
	<i>Report Date</i>	2014-04-22	2014-07-14	2014-07-14	2014-07-14	2014-07-14

#### A.4.2 DGPS

<i>Description</i>	Rainier, and all of her launches, are equipped with beacon receivers. These receivers are tuned to the closest available US Coast Guard maintained beacon transmitter with a reliable signal. The USCG beacon selected may change throughout the survey day depending on the received signal strength and position of the survey platform. GPS correctors are fed to the Applanix POS/MVs to produce real time differentially corrected positions.
--------------------	--

<i>Antennas</i>	<i>Manufacturer</i>	Furuno					
	<i>Model</i>	GR-8 antenna coupler with preamp, FAW-1.2 whip antenna					
	<i>Description</i>	This unit consists of a preamp unit with a screw-in 1.2 meter whip antenna.					
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221	2801	2802	2804	
		<i>Antenna s/n</i>	1-1109	1-0785	1-1486	1-1499	
	<i>Manufacturer</i>	Trimble					
	<i>Model</i>	Trimble Pro Beacon					
	<i>Description</i>						
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	2803				
		<i>Antenna s/n</i>	unknown				
<i>Receivers</i>	<i>Manufacturer</i>	Furuno					
	<i>Model</i>	GR-80					
	<i>Description</i>	The Furuno GR-80 DGPS Beacon Receiver acquires differential error correction messages (RTCM SC104 format) broadcast by US Coast Guard radio beacons operating in the 283.5 to 325 kHz frequency range. The differential error correction messages are output via a serial port in NMEA 0183 protocol for use with an associated GPS receiver This results in differentially corrected position data with better than 2 meter accuracy.					
	<i>Firmware Version</i>	unknown					
	<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221	2801	2802	2803	2804
		<i>Antenna s/n</i>	3506-8414	3506-6743	3506-8385	3306-8043	3506-8032

### A.4.3 Trimble Backpacks

<i>Manufacturer</i>	Trimble
<i>Model</i>	Pathfinder Pro XRS
<i>Description</i>	Rainier personnel use the Trimble “backpack” GPS system to obtain positions of selected shoreline features. They are also useful in positioning linear features on the

	<p>shore such as finger piers or roads where the user can simply go ashore and walk the boundary of the object in question while wearing the backpack. The system consists of a Pathfinder Pro XRS, a 12-channel GPS receiver that provides real-time 1-2 meter accuracy with built-in Coast Guard differential beacon reception capability. This GPS receiver is connected to a Toughbook all-weather laptop computer running Caris Notebook. Due to both the portable and weather resistant attributes of this setup, it can be used in an open skiff to augment traditional shoreline verification in a survey launch.</p>	
<i>Serial Numbers</i>	While the Trimble backpacks themselves have no serial numbers, the individual components they contain do.	
<i>Antennas</i>	<i>Manufacturer</i>	Trimble
	<i>Model</i>	GPS Pathfinder Pro XRS Antenna (part number 33580-50)
	<i>Description</i>	Integrated L1 GPS/Beacon/Satellite differential antenna
	<i>Serial Numbers</i>	0220309434 0220309470
<i>Receivers</i>	<i>Manufacturer</i>	Trimble
	<i>Model</i>	Pathfinder Pro XRS
	<i>Description</i>	GPS receiver with built-in USCG beacon capabilities.
	<i>Firmware Version</i>	unknown
	<i>Serial Numbers</i>	0224070094 0224070154
<i>Field Computers</i>	<i>Manufacturer</i>	Panasonic
	<i>Model</i>	Toughbook 30
	<i>Description</i>	The Panasonic Toughbook CF-30 comes standard with a 1.66 GHz Intel Core Duo processor in a sealed all-weather design magnesium alloy case. The screen consists of a 13.3" sunlight-viewable display. Other design elements include a shock-mounted 160GB hard drive, a moisture and dust-resistant LCD, keyboard and touchpad. This laptop also has no cooling fan and instead dissipates heat "evenly" through the chassis. Having no fan ensures a better seal against dust and moisture. All external connection ports are also protected with waterproof flaps and covers.
	<i>Operating System</i>	Windows XP
	<i>Serial Numbers</i>	8HKSb80717 8HKSb80775 6LKSA03677 8HKSb80724

<i>DQA Tests</i>	<i>Date</i>	2014-03-19
	<i>Serial Number</i>	0224070094 & 0224070154
	<i>Methods</i>	During March 2014, horizontal control hardware was tested on benchmark TIDAL 1987 at NOAA Facility Sandpoint. For the Trimble Backpacks, data were collected over the benchmark for data for 5 minutes in both differential and non-differential modes. Base Stations, survey cameras capable of recording GPS positions and handheld GPS units were also tested.
	<i>Results</i>	The largest error seen with differential corrected Trimble Backpack data was 0.279m. The largest error seen with non-differential corrected Trimble Backpack data was 3.484m.



Figure 11: Trimble backpack GPS system deployed to position benchmarks at a tide gauge installation.

#### A.4.4 Laser Rangefinders

<i>Manufacturer</i>	Laser Technology Inc.
<i>Model</i>	Impulse 200 LR
<i>Description</i>	The Impulse 200 LR (long range) is a hand-held, light weight laser ranging instrument which includes onboard calculation ability for height, horizontal, and vertical distance. The typical max range to a non-reflective target is 500m (1,640ft) with range accuracy of 3-5 centimeters. Two AA batteries supply up to 20 hours of use. Aiming is simplified with a 1X red-dot scope. In addition to measuring the distance to shoreline features, this instrument is also used to measure the waterline of Rainier.
<i>Serial Numbers</i>	108786
<i>DQA Tests</i>	DQA test was not performed.

<i>Manufacturer</i>	Leica
<i>Model</i>	DISTO lite5
<i>Description</i>	The Leica DISTO lite5 is a splash and dust proof handheld laser rangefinder that emits a Class II 0.95mW laser on a wavelength of 620-690nm. Ranges measurable vary from 0.2m up to 200m with the smallest unit displayed 1mm. Measuring accuracy (at 2x standard deviation) is typically $\pm 3\text{mm}$ , $\pm 5\text{mm}$ at the instrument's extreme range.
<i>Serial Numbers</i>	40300556
<i>DQA Tests</i>	DQA test was not performed.

#### A.4.5 Other Positioning and Attitude Equipment

No additional positioning and attitude equipment was utilized for data acquisition.

#### A.5 Sound Speed Equipment



## A.5.1 Sound Speed Profiles

### A.5.1.1 CTD Profilers

#### A.5.1.1.1 SEA-BIRD ELECTRONICS, INC. SBE 19 SEACAT

<i>Manufacturer</i>	SEA-BIRD ELECTRONICS, INC.							
<i>Model</i>	SBE 19 SEACAT							
<i>Description</i>	<p>The SEACAT SBE 19 profiler measures the electrical conductivity and temperature of seawater versus pressure. The aluminum housing allows for use in depths up to 3400 meters. The sampling rate is set by command to the instrument with a maximum rate of 2 scans per second. Data are temporarily saved on an internal 64 Kbytes of solid-state memory which allows 1.5 hours of recording while sampling at two scans per second. The profiler is self-powered with 6 alkaline batteries which provide up to 48 hours of continuous operation.</p> <p>The SEACAT embodies sensor elements (Pyrex cell and pressure-protected thermistor) and a Wein-bridge oscillator interface technique using multiplexing. This technique allows a single oscillator to service both temperature and conductivity measurements. The pressure sensor is a Senso-Metrics Series SP-91 strain-gauge sensor. Set-up, check-out, and data extraction are performed without opening the housing via an external computer connected to a bulkhead connector at the base of the profiler with a serial cable.</p> <p>To ease quick identification of individual SEACAT profilers, Rainier affixed a uniquely colored band of electrical tape around the housing at the top of each profiler. When assigned to a field unit in the plan of the day, the SEACAT profiler is simply referred to by color such as “green” or “black”.</p> <p>All Rainier launches (2801, 2802, 2803, and 2804) are equipped with 24-volt electric winches attached to small swing-arm davits to deploy and recover SV profilers while the vessel is at rest.</p>							
<i>Serial Numbers</i>	<table border="1"> <tr> <td><i>Vessel Installed On</i></td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td><i>CTD s/n</i></td> <td>192290 -0219 (gray)</td> <td>192472 -0281 (green)</td> </tr> </table>		<i>Vessel Installed On</i>	n/a	n/a	<i>CTD s/n</i>	192290 -0219 (gray)	192472 -0281 (green)
<i>Vessel Installed On</i>	n/a	n/a						
<i>CTD s/n</i>	192290 -0219 (gray)	192472 -0281 (green)						

<i>Calibrations</i>	<i>CTD s/n</i>	192290-0219	192472-0281
	<i>Date</i>	2014-01-13	2014-01-16
	<i>Procedures</i>	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.



*Figure 12: The SEACAT SBE 19 profiler. Note the band of electrical tape around the housing at the top of profiler marking this as the "green" CTD.*

**A.5.1.1.2 SEA-BIRD ELECTRONICS, INC. SBE 19plus SEACAT**

<i>Manufacturer</i>	SEA-BIRD ELECTRONICS, INC.					
<i>Model</i>	SBE 19plus SEACAT					
<i>Description</i>	<p>The SBE 19plus SEACAT profiler is designed to measure conductivity, temperature, and pressure in marine or fresh-water environments. The plastic housing of the profiler is rated for depths up to 600 meters (1950 feet). The 19plus runs continuously, sampling at four scans per second (4 Hz). Nine D-size alkaline batteries provide 60 hours operation in profiling mode. Eight Mbytes of FLASH RAM records 50 hours of conductivity, temperature, and pressure data while sampling at four scans per second.</p> <p>Logging is started by sliding the On/Off switch. In an improvement over the SEACAT SBE 19, the standard SBE 19plus includes an externally mounted SBE 5M pump, which provides a constant flow rate through the conductivity cell regardless of descent rate. As with the SBE 19, set-up, check-out, and data extraction are performed without opening the housing by connecting a serial cable between an external computer to a glass-reinforced epoxy bulkhead 4-pin I/O connector at the base of the profiler.</p> <p>To ease quick identification of individual SEACAT profilers, Rainier affixed a uniquely colored band of electrical tape around the housing at the top of each profiler. When assigned to a field unit in the plan of the day, the SEACAT profiler is simply referred to by color such as “green” or “black”.</p> <p>All Rainier launches (2801, 2802, 2803, and 2804) are equipped with 24-volt electric winches attached to small swing-arm davits to deploy and recover SV profilers while the vessel is at rest.</p> <p>On June 10, 2014 (DN161) the SBE 19plus (s/n 19P75469-7371) was lost after it snagged on the bottom and parted the winch line. Strong and dangerous currents prevented an attempt to recover the profiler with scuba divers.</p>					
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	n/a	n/a	n/a	n/a	n/a
	<i>CTD s/n</i>	19P 26069-4039 (black)	19P 27151-4114 (yellow)	19P 30319-4306 (blue)	19P 31464-4343 (purple)	19P 75469-7371 (red)

<i>Calibrations</i>	<i>CTD s/n</i>	26069-4039	27151-4114	30319-4306	31464-4343	75469-7371
	<i>Date</i>	2014-01-23	2014-01-13	2014-01-13	2014-07-12	2014-01-30
	<i>Procedures</i>	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.	Sent to Sea-Bird electronics Inc. in Bellevue Washington for yearly post cruise calibration.



*Figure 13: The SBE 19plus SEACAT profiler. Note the band of electrical tape around the housing at the top of profiler marking this as the "yellow" CTD*

### A.5.1.2 Sound Speed Profilers

#### A.5.1.2.1 Rolls-Royce Group ODIM Brooke Ocean MVP200 Moving Vessel Profiler (MVP)

<i>Manufacturer</i>	Rolls-Royce Group ODIM Brooke Ocean										
<i>Model</i>	MVP200 Moving Vessel Profiler (MVP)										
<i>Description</i>	<p>Rainier is equipped with a Rolls-Royce Group ODIM Brooke Ocean MVP200 Moving Vessel Profiler (MVP). This system consists of a sensor fish, a conductor cable, a computer controlled high speed hydraulic winch, and a cable metering system. In the underway mode, the sensor fish is towed behind the ship and periodically is allowed to free-fall near vertical through the water column recording sound velocity profiles. This enables Rainier to take SV casts without stopping the ship. To take deeper SV casts and take full advantage of all the cable on the drum, the ship must come to a stop. While stationary, 600 meter deep SV casts may be collected as opposed to a maximum of 235 meters deep when the ship is in typical survey mode and underway at 10 knots.</p> <p>The actual sensor package contained within the towfish is an Applied Microsystems Micro CTD. The unit consists of a 4-electrode conductivity sensor accurate to +/-0.01 mS/cm with a resolution of 0.001 mS/cm, a temperature (precision aged thermistor) sensor accurate to +/-0.005° C with a resolution of 0.001° C, and a pressure (temperature compensated strain gauge) sensor accurate to +/-0.05% FS (full scale) with a resolution of 0.005% FS. The Micro CTD supplied with the MVP200 is rated at 1000-dbar.</p> <p>During the previous year's field season the MVP200 experienced several failures of the Micro CTD. In two of the cases the conductivity sensor unit protruding from the side of the towfish had actually been sheared off. In an effort to mitigate this issue, ODIM Brooke Ocean was contacted and provided Rainier with stainless steel sensor guards similar to those found on the MVP30. The guards were installed by Rainier personnel during the winter repair period and as of yet, no sensor failure has occurred in during the 2014 field season.</p>										
<i>Serial Numbers</i>	<table border="1"> <tr> <td><i>Vessel Installed On</i></td> <td>S221 Rainier</td> <td>spare</td> <td>spare</td> </tr> <tr> <td><i>Sound Speed Profiler s/n</i></td> <td>8614</td> <td>7761</td> <td>8564</td> </tr> </table>			<i>Vessel Installed On</i>	S221 Rainier	spare	spare	<i>Sound Speed Profiler s/n</i>	8614	7761	8564
<i>Vessel Installed On</i>	S221 Rainier	spare	spare								
<i>Sound Speed Profiler s/n</i>	8614	7761	8564								

<i>Calibrations</i>	<i>Sound Speed Profiler s/n</i>	8614	7761	8565
	<i>Date</i>	2014-04-22	2014-03-26	2014-03-26
	<i>Procedures</i>	Sent to AML Oceanographic in Sidney B.C. Canada for repair and yearly post cruise calibration.	Sent to AML Oceanographic in Sidney B.C. Canada for repair and yearly post cruise calibration.	Sent to AML Oceanographic in Sidney B.C. Canada for repair and yearly post cruise calibration.



*Figure 14: The ODIM Brooke Ocean MVP200 Moving Vessel Profiler being deployed from Rainier.*





*Figure 15: The stainless steel sensor guards as installed on the MVP200 fish.*

#### **A.5.1.2.2 Rolls-Royce Group ODIM Brooke Ocean MVP30 Moving Vessel Profiler (MVP)**

<i>Manufacturer</i>	Rolls-Royce Group ODIM Brooke Ocean
<i>Model</i>	MVP30 Moving Vessel Profiler (MVP)
<i>Description</i>	Vessel 2804 is equipped with a Rolls-Royce Group ODIM Brooke Ocean MVP30 MVP. This system consists of a sensor fish, a conductor cable, a computer controlled high speed hydraulic winch, and a cable metering system. In the underway mode the sensor fish is towed behind the launch and periodically is allowed to freefall near vertical through the water column recording sound velocity profiles. This enables the launch to take SV casts without stopping the vessel at the cost of not being able to collect casts with depths equal to the available cable length. To take deeper SV casts and take full advantage of all the cable on the drum, the launch must stop. While

	stationary, 125 meter deep SV casts may be collected as opposed to a maximum of 50 meters deep when the launch is in typical survey mode and underway at 7 knots.		
	The actual sensor package contained within the towfish is an Applied Microsystems Micro CTD. The unit consists of a 4-electrode conductivity sensor accurate to +/-0.01 mS/cm with a resolution of 0.001 mS/cm, a temperature (precision aged thermistor) sensor accurate to +/-0.005° C with a resolution of 0.001° C, and a pressure (temperature compensated strain gauge) sensor accurate to +/-0.05% FS (full scale) with a resolution of 0.005% FS. The Micro CTD supplied with the MVP30 is rated at 200-dbar.		
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	2804	spare
	<i>Sound Speed Profiler s/n</i>	7510	7511
<i>Calibrations</i>	<i>Sound Speed Profiler s/n</i>	7510	7511
	<i>Date</i>	2014-03-26	2014-03-26
	<i>Procedures</i>	Sent to AML Oceanographic in Sidney B.C. Canada for yearly post cruise calibration.	Sent to AML Oceanographic in Sidney B.C. Canada for yearly post cruise calibration.



*Figure 16: The ODIM Brooke Ocean MVP30 Moving Vessel Profiler as mounted aboard 2804.*

## A.5.2 Surface Sound Speed


### A.5.2.1 Reson Inc. SVP 70

<i>Manufacturer</i>	Reson Inc.
<i>Model</i>	SVP 70
<i>Description</i>	The SVP 70 is a direct reading sound velocity probe with a sound transmission

	path of 125mm. The unit's housing is constructed of a robust titanium that eases cleaning in environments with high levels of marine growth and is recommended for permanent installations. This sensor is mounted in close proximity to each ship's multibeam transducers and provides real time surface sound speed values for refraction corrections. Yearly calibrations on the SVP 70 are not performed since the instrument can only be removed from the ship during dry dock.	
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	S221
	<i>Sound Speed Sensor s/n</i>	unknown
<i>Calibrations</i>	No CTD profiler calibrations were performed.	

**A.5.2.2 Reson Inc. SVP 71**

<i>Manufacturer</i>	Reson Inc.				
<i>Model</i>	SVP 71				
<i>Description</i>	The SVP 71 is a direct reading sound velocity probe with a sound transmission path of 125mm. The unit's housing is constructed of a hard anodized sea water resistant aluminum and is recommended for a semi-permanent mounting where regular maintenance is possible. This sensor is mounted in close proximity to each launches' multibeam transducers and provides real time surface sound speed values for refraction corrections.				
<i>Serial Numbers</i>	<i>Vessel Installed On</i>	2801	2802	2803	2804
	<i>Sound Speed Sensor s/n</i>	1511089	1511086	1511076	1511077
<i>Calibrations</i>	No CTD profiler calibrations were performed.				

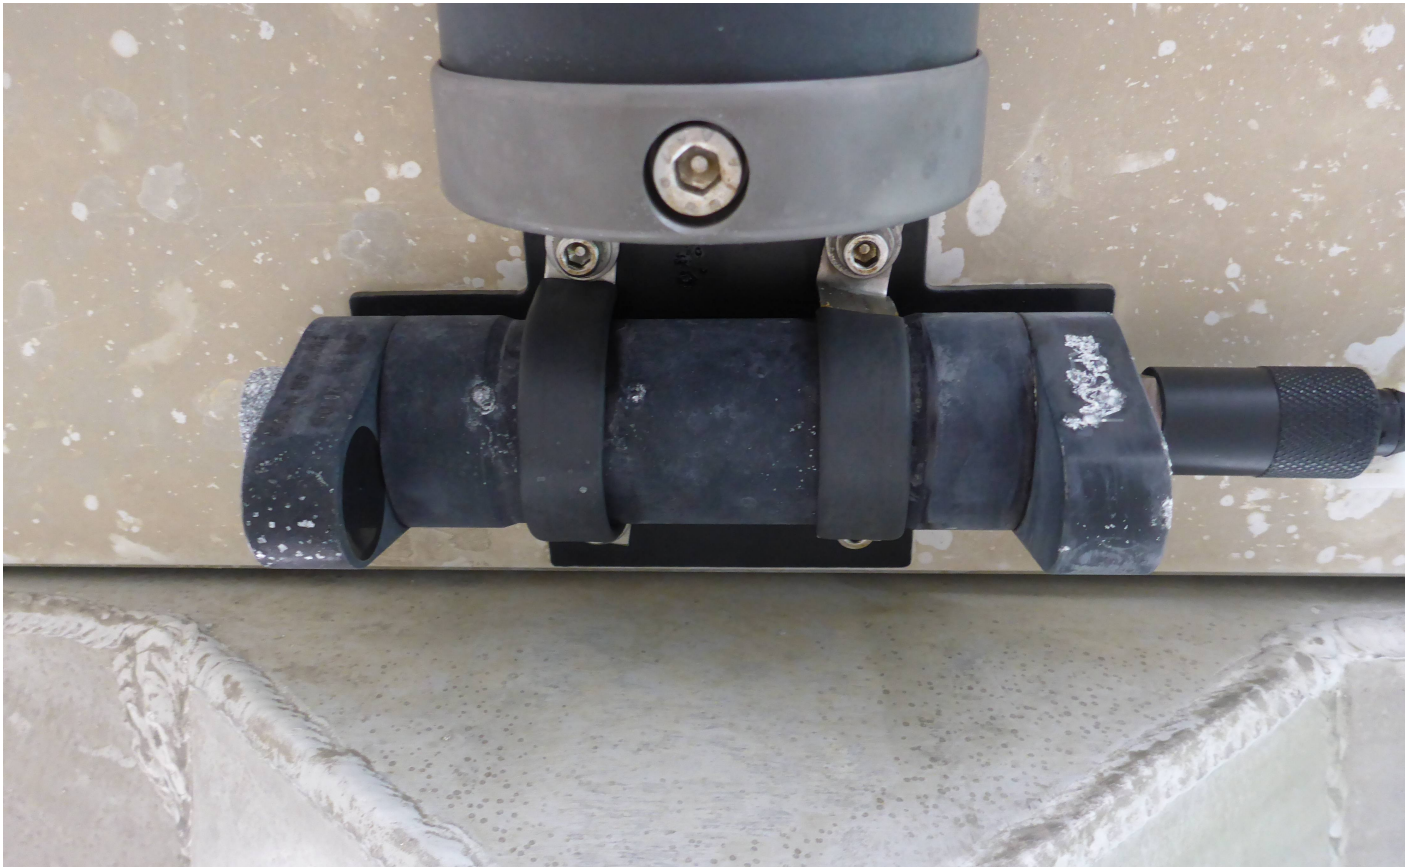

*Figure 17: A Reson SVP 71 surface sound speed sensor mounted on a survey launch in close proximity to the Reson 7125 transducer.*

#### **A.5.2.3 Odom Hydrographic Systems Digibar Pro, model DB1200**

<i>Manufacturer</i>	Odom Hydrographic Systems
<i>Model</i>	Digibar Pro, model DB1200
<i>Description</i>	The Odom Digibar Pro consists of a handheld display/logger with a RS232 computer interface. This logger is connected to a waterproof stainless steel probe by a detachable, four conductor, Kevlar reinforced, and polyethylene jacket cable. Mounted near the end of the sampling probe is the high frequency "sing-around" transducer and its associated reflector. Sound velocity is directly measured at a 10 Hz sampling rate by transmitting a ping with a frequency of 11 kHz. The precisely spaced transducer and reflector is used to measure the velocity of sound in water by transmitting and receiving a signal across their known separation distance. This sensor is mounted in close proximity to a multibeam transducer to provide real time surface sound speed values for refraction corrections.

<i>Serial Numbers</i>	<i>Vessel Installed On</i>	spare	spare
	<i>Sound Speed Sensor s/n</i>	98015	98016
<i>Calibrations</i>	No CTD profiler calibrations were performed.		

## A.6 Horizontal and Vertical Control Equipment

### A.6.1 Horizontal Control Equipment

#### A.6.1.1 Base Station Equipment

<i>Description</i>	<p>In the absence of a local Continuously Operating Reference Station (CORS) network, Rainier maintains at least one GPS base station during hydrographic operations in the project area. Base station sites are chosen for both clear lines of site to either survey launches or the ship for easy data downloads in addition to a clear horizon to maximize the number of GPS satellites observed. At the recommendation of Applanix, base station sites are selected to fall within 20 kilometers of all data within the project area.</p> <p>Each station consists of either a Trimble NetR5 or Trimble NetR9 GNSS reference receiver interfaced with a Freewave HTP-900RE 900 MHz Ethernet radio all sealed in a watertight Pelican plastic case. A Zephyr Geodetic 2 GPS antenna is secured atop a Seco fixed-height GPS antenna tripod and connected to the Trimble receiver through a watertight connection fitted in the side of the Pelican case. A UHF antenna on top of an extending pole supported by a standard survey tripod is connected to the Freewave Ethernet radio and provides for remote daily download of the Trimble data. Batteries and solar panels provide power.</p>		
<i>GPS Antennas</i>	<i>Manufacturer</i>	Trimble Navigation Ltd.	
	<i>Model</i>	Zephyr Geodetic 2	
	<i>Description</i>	The Trimble Zephyr Geodetic 2 antenna is an ideal design for horizontal control work. This antenna incorporates a large proprietary ground plane to “burn up” multipath energy. The Zephyr Geodetic 2 antenna is extremely rugged with a low profile design constructed of weather-resistant materials. This antenna is compatible with GNSS signals, including GPS L2C and L5, GLONASS, and even Galileo is supported.	
	<i>Serial Numbers</i>	unknown	

<i>GPS Receivers</i>	<i>Manufacturer</i>	Trimble Navigation Limited
	<i>Model</i>	NetR5 (Moe)
	<i>Description</i>	The Trimble NetR5 reference station is a multi-channel, multi-frequency GNSS (Global Navigation Satellite System) receiver designed for use as a stand-alone reference station or as part of a GNSS infrastructure solution. With 76 channels it can track all GPS signals (L1/L2/L5) as well as GLONASS (L1/L2). This receiver contains 56 MB of internal storage and has Ethernet ports compatible with HTTP and FTP protocols. Power is provided through a 9.5 V to 28 V DC input on 26 pin D sub connector while an internal 15 hour battery operates as a UPS in the event of power source outage.
	<i>Firmware Version</i>	n/a
	<i>Serial Numbers</i>	4910K61066
	<i>Manufacturer</i>	Trimble Navigation Limited
	<i>Model</i>	NetR9 (Curly)
	<i>Description</i>	The Trimble NetR9 reference station is a multi-channel, multi-frequency GNSS (Global Navigation Satellite System) receiver designed for use as a stand-alone reference station or as part of a GNSS infrastructure solution. With 440 channels is capable of tracking signals from GPS, GLONASS, Galileo, Compass, and QZSS constellations. This receiver contains 8 GB of internal storage and an integrated RJ45 port with full-duplex, auto-negotiate 100Base-T compatible with HTTP and FTP protocols. Power is provided through Power over Ethernet (PoE) or a 9.5 V to 28 V DC input on a Lemo port while an internal 15 hour battery operates as a UPS in the event of power source outage.
	<i>Firmware Version</i>	n/a
	<i>Serial Numbers</i>	5034K69715

<i>UHF Antennas</i>	<i>Manufacturer</i>	L-com Global Connectivity
	<i>Model</i>	HGV-906U 800/900 MHz 6 dBi Omnidirectional Antenna
	<i>Description</i>	The HyperGain HGV-906U is a high performance omni directional antenna designed for the 800 MHz / 900 MHz ISM band. It is ideally suited for multipoint, non line of sight and mobile applications where high gain and wide coverage is desired. This antenna's construction features a rugged 1.3" diameter white high intensity fiberglass radome for durability. It is designed for all weather operation.
	<i>Serial Numbers</i>	n/a
	<i>Manufacturer</i>	PCTEL Inc.
	<i>Model</i>	Bluewave BGYD890M
	<i>Description</i>	The BGYD890M Yagi antenna provides directional high gain broadband performance between the frequencies of 890-960 MHz with a 12 dBd gain. Ten 3/8" solid aluminum elements complement the fully welded dipole on the boom. The BGYD890M is protected from the elements with a black powder coat. An integral low loss 2' RG213 feed line with a standard N-female connector provides connectivity. A supplied high strength mounting clamp allows for vertical or horizontal polarization.
<i>Serial Numbers</i>	n/a	
<i>UHF Radios</i>	<i>Manufacturer</i>	Freewave
	<i>Model</i>	HTP-900RE
	<i>Description</i>	The FreeWave Technologies HTplus Industrial 900 MHz Radio is an industrial grade high speed Ethernet radio that operates in harsh environments and noisy RF conditions. It features high speed (867 Kbps) over-the-air throughput with strong signal performance, maintaining high sensitivity even in marginal conditions. This radio has a point-to-point range of 15 miles with clear line of sight.
	<i>Firmware Version</i>	n/a
	<i>Serial Numbers</i>	885-5935 in NetR9 base station
		885-8781 in NetR5 base station
		886-0741 on S221 [Rainier]
886-3478 on 2803 [RA3]		
886-0701 on 2801 [RA4]		
886-3434 on 2802 [RA5]		
886-0778 on 2804 [RA6]		
884-8978 (spare)		



<i>Solar Panels</i>	<i>Manufacturer</i>	Uni-Solar (United Solar Systems Corp)
	<i>Model</i>	MBC-525
	<i>Description</i>	The Uni-Solar MBC-525 is a flexible 51" X 16" solar panel rated at 22 watts.
	<i>Serial Numbers</i>	n/a
<i>Solar Chargers</i>	<i>Manufacturer</i>	Morning Star
	<i>Model</i>	Sun Saver 10 SS-10L-12V
	<i>Description</i>	The Morningstar SunSaver SS-10L-12V is a small solar controller that regulates how much power goes into the storage batteries connected to a solar panel. The amount of power passed to the battery is dependent on the current level of the battery. This power regulation helps to increase long-term battery life. The SunSaver also includes Low Voltage Disconnect (LVD) which automatically shuts off the load when batteries get to low, also saving on long-term battery life.
	<i>Serial Numbers</i>	n/a
<i>DQA Tests</i>	No DQA tests were performed.	

### **A.6.1.2 Rover Equipment**

No rover equipment was utilized for data acquisition.

### **A.6.2 Vertical Control Equipment**

**A.6.2.1 Water Level Gauges**


<i>Manufacturer</i>	CO-OPS Seattle Instrument Lab							
<i>Model</i>	Portable Tide Gauge (PTG) system, 9210B data collection platform							
<i>Description</i>	<p>The Portable Tide Gauge (PTG) is used for temporary installations in locations without the infrastructure to support a typical full installation. The PTG is a stand-alone water level station housed in a ruggedized weatherproof housing and includes all components necessary to measure, record, and transmit near real-time water levels from anywhere within the GOES footprint. The PTG utilizes a pump as opposed to compressed nitrogen for its bubbler system thus reducing the overall weight and complexity of the system.</p> <p>The gauge components are housed within a Pelican weatherproof hard plastic housing. Inside the Pelican case is mounted a Sutron 9210B Data Collection Platform (DCP), a WaterLog H-355 Pump, and a Paroscientific 6000-30G pressure sensor. There are five external connections on the outside of the waterproof housing; the orifice quick connect, the GOES antenna connection (Type-N), a GPS antenna connection (SMA), a solar panel connection (2 pins), and finally the battery connection (4 pins).</p> <p>A complete PTG kit includes the gauge itself, GOES and GPS antennae, 40W solar panel, 40Ah battery, tripod, orifice, bubbler tubing and necessary cables. Additionally, a computer with an available serial port and a DB-9 serial cable are required to configure the DCP and/or manually download data.</p> <p>This field season on an experimental basis, Rainier was provided with a tide gauge (PTG 15) fitted with an Iridium connection in place of the standard GOES hardware. This configuration potentially provides remote monitoring of a tide gauge without the need for a clear shot of the southern horizon required for a GOES setup.</p> <p>Rainier personnel do not typically perform any calibrations of CO-OPS supplied portable tide gauges. Rather all gauges and their associated equipment are returned to CO-OPS Seattle where annual maintenance and calibrations are conducted during the ship's winter inport period.</p>							
<i>Serial Numbers</i>	<table border="1"> <tr><td>PTG 04</td></tr> <tr><td>PTG 05</td></tr> <tr><td>PTG 06</td></tr> <tr><td>PTG 07</td></tr> <tr><td>PTG 08</td></tr> <tr><td>PTG 09</td></tr> <tr><td>PTG 15 (Iridium)</td></tr> </table>	PTG 04	PTG 05	PTG 06	PTG 07	PTG 08	PTG 09	PTG 15 (Iridium)
PTG 04								
PTG 05								
PTG 06								
PTG 07								
PTG 08								
PTG 09								
PTG 15 (Iridium)								
<i>Calibrations</i>	No calibrations were performed.							



Figure 18: The Portable Tide Gauge (PTG) system, 9210B data collection platform.

<i>Manufacturer</i>	AXYS Technologies Inc.
<i>Model</i>	Hydrolevel Mini
<i>Description</i>	<p>The NOAA tide buoy is a wave-following, tilt-compensated GPS buoy system intended to obtain water level measurements away from shore. The tide buoy system offers the advantage of being a highly mobile system that is quick and easy to install as opposed to a traditional shore station that requires a large investment in terms of time and manpower to stage and install the gauge, tide staff, and benchmarks.</p> <p>The NOAA tide buoy is the wave-following spherical buoy design “Hydrolevel Mini” from AXYS Technologies Inc. The stainless steel hull measures 0.6 m (25.5 in.) in diameter and under full battery payload weights approximately 156 lb (71 kg). A GPS antenna, navigation light, and Iridium antenna are surface-mounted on the buoy exterior. Power for up to 20 days is provided by two 12 V/ 60 Ah rechargeable Lithium-Iron-Phosphate (LiFePO4) battery packs. For longer deployments an additional 30 days can be gained by adding a 60 non-rechargeable, 3.6-V / 19-Ah lithium thionyl chloride (Li-SOCl<sub>2</sub>) batteries.</p> <p>The instrument package of the NOAA tide buoy consists of an Ashtech MB100 L1/L2 receiver and a LORD Corp. MicroStrain 3DM-GX1 heading, roll &amp; pitch sensor. The 3DM-GX1 combines a set of three orthogonal angular rate gyros and DC</p>

	<p>accelerometers &amp; magnetometers to produce the motion measurement. An AXYS Watchman 500 on-board computer records dual-frequency (L1/L2) all-in-view GPS code and carrier Observations from the GPS receiver and attitude data motion sensor to a Compact Flash storage drive. Periodic datagrams are sent out via Iridium satellite.</p> <p>The Watchman 500 logging computer saves three different types of data, a *.txt file of periodic system health datagrams, “Tilt” files from the MicroStrain tilt sensor, and “Output” containing raw binary GPS data. The raw GPS files are renamed, sorted, and converted to RINEX. The time-binned GPS session files are then imported into Applanix POS GNSS, a GPS post-processing program contained in the POSpac Mobile Mapping Suit.</p> <p>The output of GPS post-processing is a time series of instantaneous antenna reference point (ARP) ellipsoid heights. Since wave action lowers the buoy antenna relative to its nominal upright height from the waterline, tilt data are used to apply a correction to the ARP height time series. This correction results in a time series of instantaneous water-level ellipsoidal heights.</p>
<i>Serial Numbers</i>	TMB00320
<i>Calibrations</i>	No calibrations were performed.

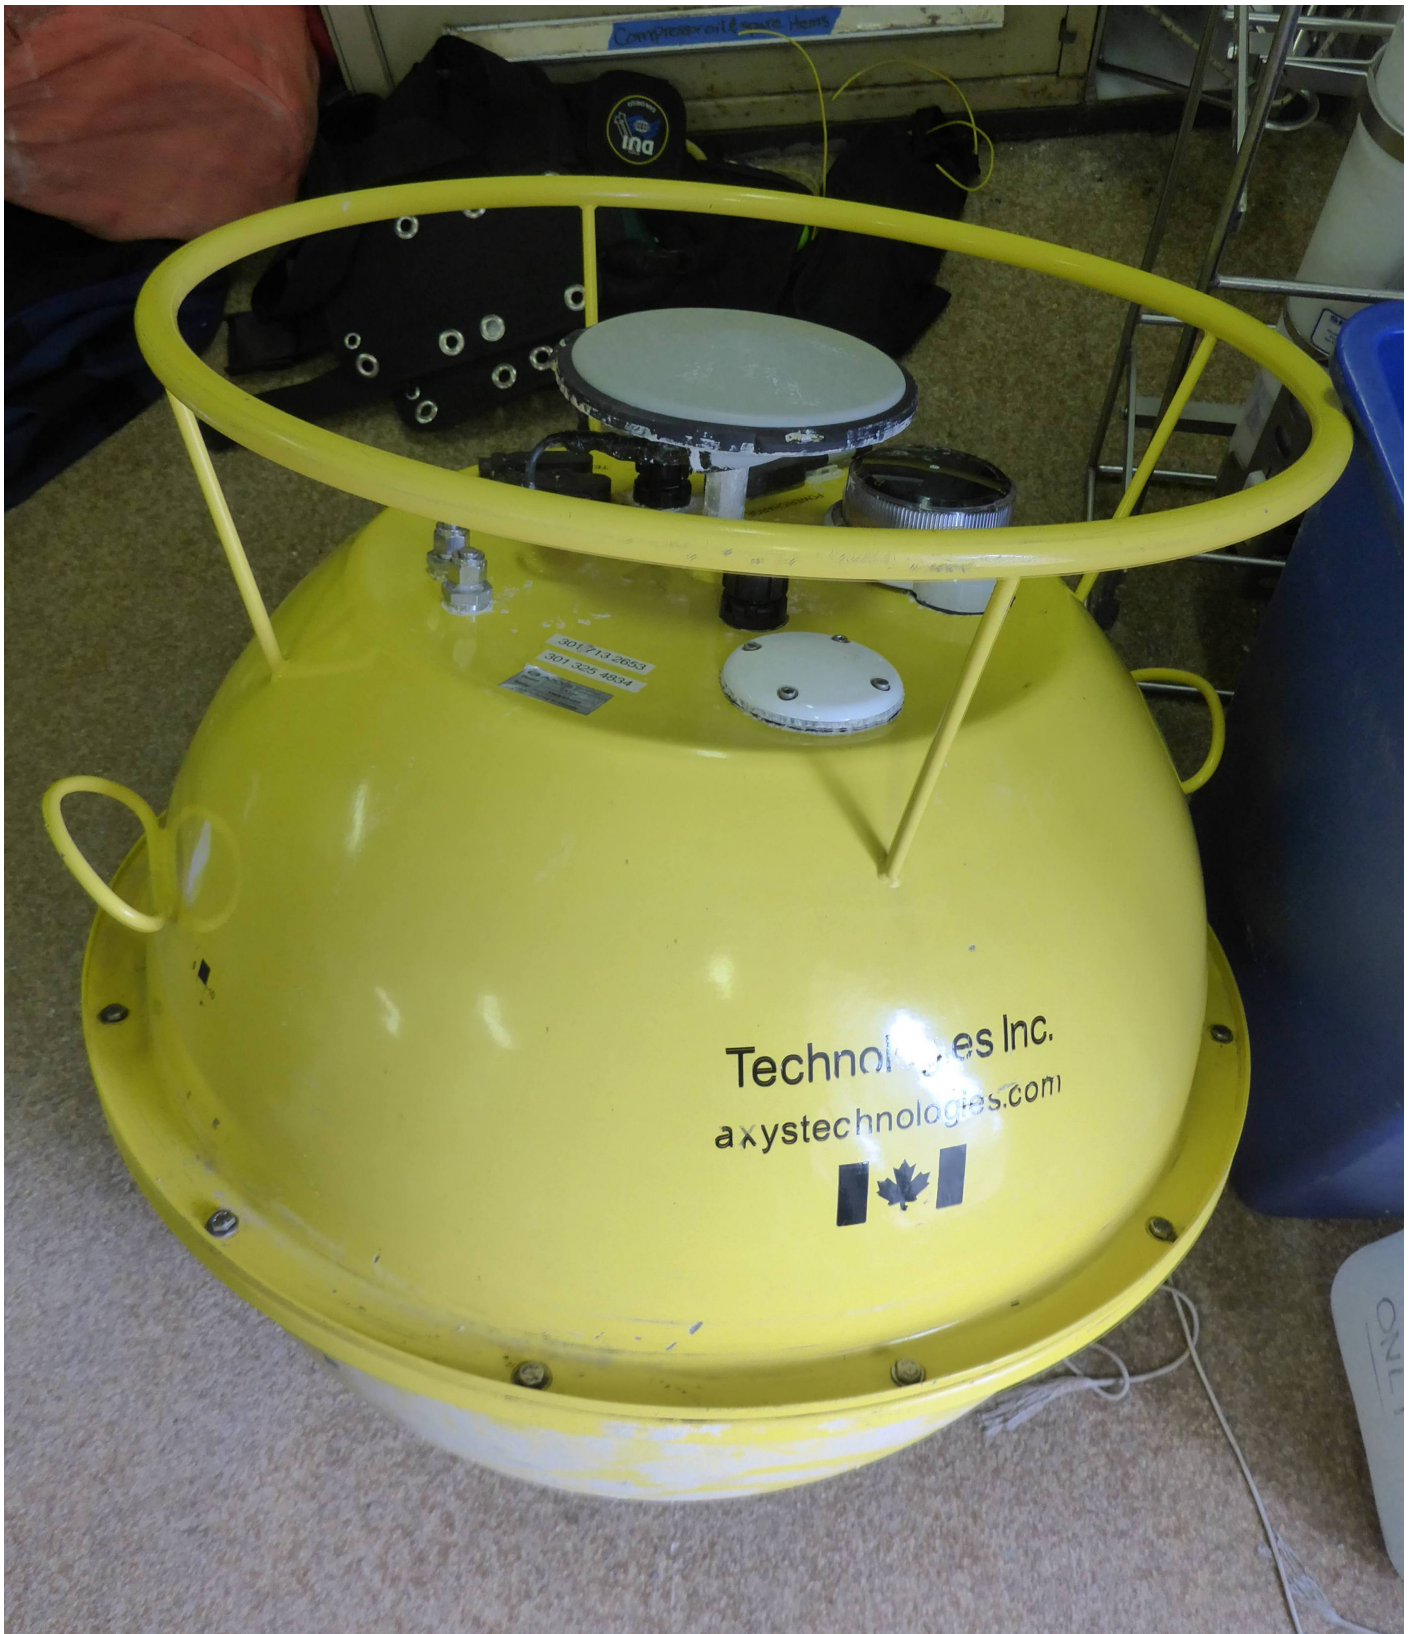

*Figure 19: The AXYS Technologies Inc. Hydrolevel Mini tide buoy.*


**A.6.2.2 Leveling Equipment**

<i>Manufacturer</i>	Carl Zeiss											
<i>Model</i>	Zeiss Ni2											
<i>Description</i>	<p>The Zeiss Ni2 is the first automatic level based on suspended prisms that levels the light path. When set close to level, the internal compensator mechanism (a swinging prism) automatically removes any remaining variation from level. This reduces the need to set the instrument truly level since small inclination deviations are automatically corrected for.</p> <p>The telescope has a magnification power of 32 times and an objective diameter of 40 millimeters. It is 270 millimeters in length and produces an erect image. The cross-hairs form a straight cross with stadia hairs on the vertical hair. In contrast to most other geodetic instruments the cross-hairs only occupy the central 50% of the field of view.</p>											
<i>Serial Numbers</i>	<table border="1"> <tr><td>87102</td></tr> <tr><td>87312</td></tr> <tr><td>100578</td></tr> </table>			87102	87312	100578						
87102												
87312												
100578												
<i>Calibrations</i>	<table border="1"> <tr> <td><i>Level s/n</i></td> <td>87102, 87312, and 100578</td> <td>87312</td> </tr> <tr> <td><i>Date</i></td> <td>2013-12-17</td> <td>2014-03-17</td> </tr> <tr> <td><i>Procedures</i></td> <td>The levels were taken in to Kuker-Ranken Inc. for annual cleaning, inspection, adjustment, and calibration.</td> <td>The level was taken in to Kuker-Ranken Inc. for adjustment, and calibration.</td> </tr> </table>	<i>Level s/n</i>	87102, 87312, and 100578	87312	<i>Date</i>	2013-12-17	2014-03-17	<i>Procedures</i>	The levels were taken in to Kuker-Ranken Inc. for annual cleaning, inspection, adjustment, and calibration.	The level was taken in to Kuker-Ranken Inc. for adjustment, and calibration.		
<i>Level s/n</i>	87102, 87312, and 100578	87312										
<i>Date</i>	2013-12-17	2014-03-17										
<i>Procedures</i>	The levels were taken in to Kuker-Ranken Inc. for annual cleaning, inspection, adjustment, and calibration.	The level was taken in to Kuker-Ranken Inc. for adjustment, and calibration.										

<i>Kukkamaki</i>	<i>Level s/n</i>	87102 and 100578	87312	87102	87312 & 100518
	<i>Date</i>	2014-03-04	2014-03-18	2014-08-01	2014-08-12
	<i>Procedures</i>	The Kukkamaki procedure used follows that outlined in the User's Guide for the Installation of Bench Marks and Leveling Requirements for Water Level Stations, October 1987.	The Kukkamaki procedure used follows that outlined in the User's Guide for the Installation of Bench Marks and Leveling Requirements for Water Level Stations, October 1987.	Mid-season Check The Kukkamaki procedure used follows that outlined in the User's Guide for the Installation of Bench Marks and Leveling Requirements for Water Level Stations, October 1987.	Mid-season Check The Kukkamaki procedure used follows that outlined in the User's Guide for the Installation of Bench Marks and Leveling Requirements for Water Level Stations, October 1987.



*Figure 20: A Zeiss Ni2 optical level being used in the field.*

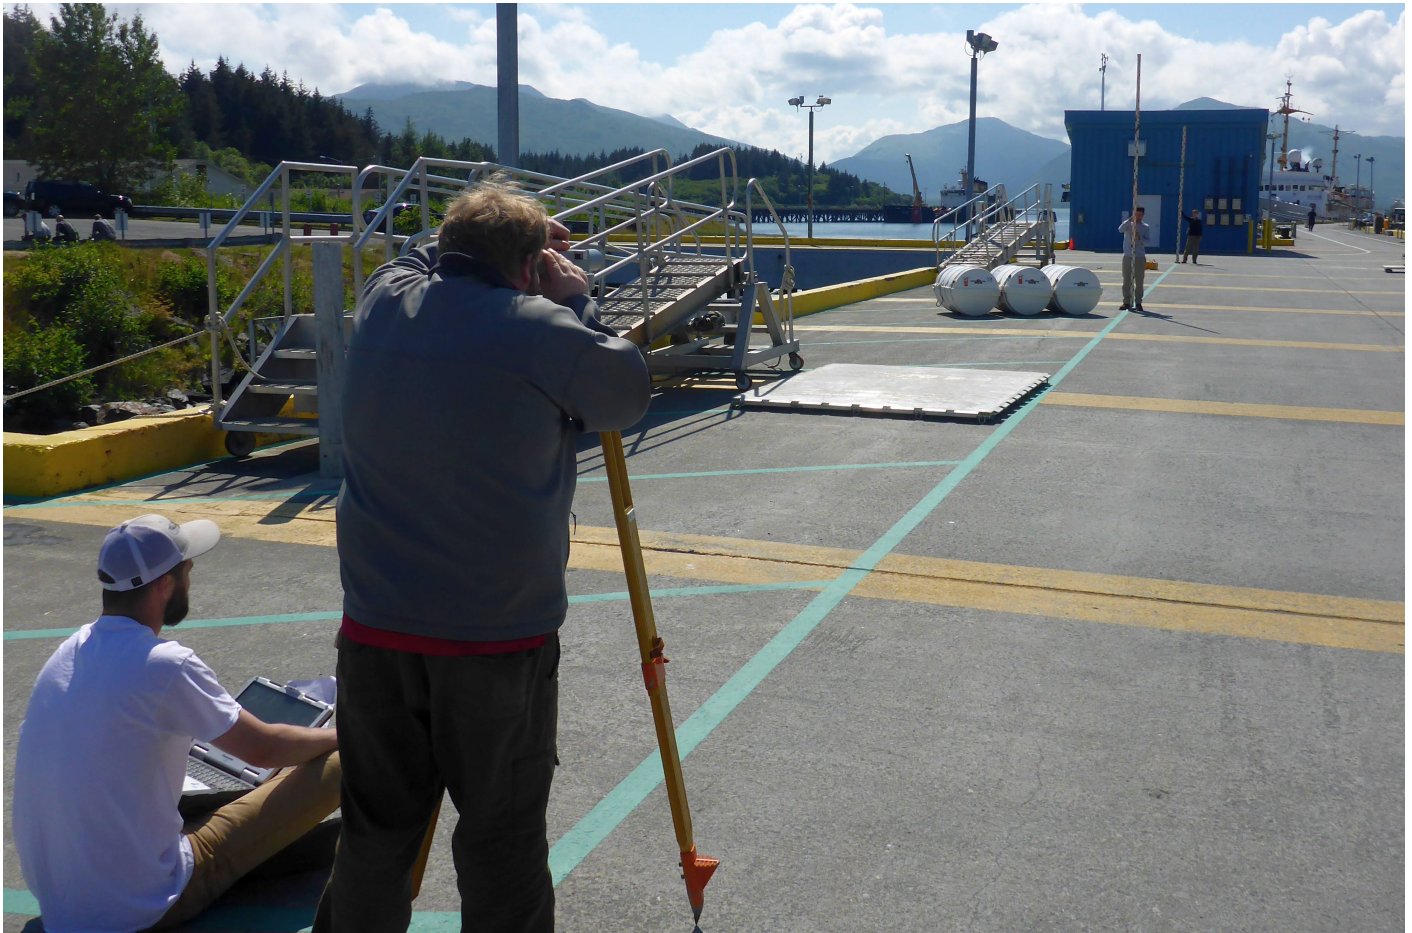

*Figure 21: A mid-season Kukkamaki test performed on a Zeiss Ni2 optical level on the pier in Kodiak, Alaska.*

## A.7 Computer Hardware and Software

### A.7.1 Computer Hardware

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500 SerialNumber 5N54KN1 SerialNumber 00371-OEM-8992671-00524



	Host Name: CST OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Microsoft Product ID: 00371-OEM-8992671-00524 Original Install Date: 10/20/2010, 7:50:07 AM System Boot Time: 7/8/2014, 11:04:05 AM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3500 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333 Mhz BIOS Version: Dell Inc. A07, 4/12/2010 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume2 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska Total Physical Memory: 12,286 MB Available Physical Memory: 8,923 MB Virtual Memory: Max Size: 24,569 MB Virtual Memory: Available: 21,203 MB Virtual Memory: In Use: 3,366 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1 [246] Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.126 [02]: fe80::f461:ad7:acff:e78f		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N54KN1	00371-OEM-8992671-00524	Processing
<i>Manufacturer</i>	Dell Inc.		
<i>Model</i>	Precision WorkStation T3500		

<i>Description</i>	<p>Name Precision WorkStation T3500</p> <p>SerialNumber 5N75KN1</p> <p>SerialNumber 00371-OEM-8992671-00524</p> <p>Host Name: PLOT2</p> <p>OS Name: Microsoft Windows 7 Professional</p> <p>OS Version: 6.1.7601 Service Pack 1 Build 7601</p> <p>OS Manufacturer: Microsoft Corporation</p> <p>OS Configuration: Member Workstation</p> <p>OS Build Type: Multiprocessor Free</p> <p>Registered Owner: LET</p> <p>Registered Organization: Microsoft</p> <p>Product ID: 00371-OEM-8992671-00524</p> <p>Original Install Date: 10/21/2010, 10:06:41 AM</p> <p>System Boot Time: 6/25/2014, 8:46:30 AM</p> <p>System Manufacturer: Dell Inc.</p> <p>System Model: Precision WorkStation T3500</p> <p>System Type: x64-based PC</p> <p>Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333</p>
	<p>Mhz</p> <p>BIOS Version: Dell Inc. A15, 3/28/2012</p> <p>Windows Directory: C:\Windows</p> <p>System Directory: C:\Windows\system32</p> <p>Boot Device: \Device\HarddiskVolume2</p> <p>System Locale: en-us;English (United States)</p> <p>Input Locale: en-us;English (United States)</p> <p>Time Zone: (UTC-09:00) Alaska</p> <p>Total Physical Memory: 12,286 MB</p> <p>Available Physical Memory: 4,448 MB</p> <p>Virtual Memory: Max Size: 24,569 MB</p> <p>Virtual Memory: Available: 9,404 MB</p> <p>Virtual Memory: In Use: 15,165 MB</p> <p>Page File Location(s): C:\pagefile.sys</p> <p>Domain: noaas.rainier.oma.noaa.ship</p> <p>Logon Server: \\RADC2 [246]: K</p> <p>Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.5 IP address(es) [01]: 10.48.12.181</p>

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N75KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	<p>Name Precision WorkStation T3500</p> <p>SerialNumber 5N73KN1</p> <p>SerialNumber 00371-OEM-8992671-00524</p> <p>Host Name: RA-PLOT3</p> <p>OS Name: Microsoft Windows 7 Professional</p> <p>OS Version: 6.1.7601 Service Pack 1 Build 7601</p> <p>OS Manufacturer: Microsoft Corporation</p> <p>OS Configuration: Member Workstation</p> <p>OS Build Type: Multiprocessor Free</p> <p>Registered Owner: ChiefET</p> <p>Registered Organization:</p> <p>Product ID: 00371-OEM-8992671-00524</p> <p>Original Install Date: 12/19/2012, 6:26:54 AM</p> <p>System Boot Time: 6/29/2014, 4:56:30 PM</p> <p>System Manufacturer: Dell Inc.</p> <p>System Model: Precision WorkStation T3500</p> <p>System Type: x64-based PC</p> <p>Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3325 Mhz</p> <p>BIOS Version: Dell Inc. A15, 3/28/2012</p> <p>Windows Directory: C:\Windows</p> <p>System Directory: C:\Windows\system32</p> <p>Boot Device: \Device\HarddiskVolume1</p> <p>System Locale: en-us;English (United States)</p> <p>Input Locale: en-us;English (United States)</p> <p>Time Zone: (UTC-09:00) Alaska</p> <p>Total Physical Memory: 12,286 MB</p> <p>Available Physical Memory: 6,622 MB</p> <p>Virtual Memory: Max Size: 24,569 MB</p> <p>Virtual Memory: Available: 19,104 MB</p> <p>Virtual Memory: In Use: 5,465 MB</p> <p>Page File Location(s): C:\pagefile.sys</p> <p>Domain: noaas.rainier.oma.noaa.ship</p> <p>Logon Server: \\RADC1</p> <p>Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection</p>

	DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.130 [02]: fe80::f04d:9247:4edf:ee7c		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N73KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	<p>           Name            Precision WorkStation T3500            SerialNumber            5N74KN1            SerialNumber            00371-OEM-8992671-00524         </p> <p>           Host Name: PLOT4            OS Name: Microsoft Windows 7 Professional            OS Version: 6.1.7601 Service Pack 1 Build 7601            OS Manufacturer: Microsoft Corporation            OS Configuration: Member Workstation            OS Build Type: Multiprocessor Free            Registered Owner: let            Registered Organization: Microsoft            Product ID: 00371-OEM-8992671-00524            Original Install Date: 10/15/2010, 12:37:25 PM            System Boot Time: 6/24/2014, 11:52:07 AM            System Manufacturer: Dell Inc.            System Model: Precision WorkStation T3500            System Type: x64-based PC            Processor(s): 1 Processor(s) Installed.                              [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333 Mhz            BIOS Version: Dell Inc. A07, 4/12/2010            Windows Directory: C:\Windows            System Directory: C:\Windows\system32            Boot Device: \Device\HarddiskVolume2            System Locale: en-us;English (United States)            Input Locale: en-us;English (United States)            Time Zone: (UTC-09:00) Alaska            Total Physical Memory: 12,286 MB            Available Physical Memory: 4,278 MB            Virtual Memory: Max Size: 24,569 MB            Virtual Memory: Available: 15,467 MB            Virtual Memory: In Use: 9,102 MB         </p>

	Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.145		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N74KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500 SerialNumber 5N64KN1 SerialNumber 00371-OEM-8992671-00524  Host Name: PLOT5 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Microsoft Product ID: 00371-OEM-8992671-00524 Original Install Date: 10/21/2010, 8:42:54 AM System Boot Time: 6/27/2014, 12:16:40 PM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3500 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333  Mhz BIOS Version: Dell Inc. A07, 4/12/2010 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume2 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska

	Total Physical Memory: 12,286 MB Available Physical Memory: 9,327 MB Virtual Memory: Max Size: 24,569 MB Virtual Memory: Available: 18,644 MB Virtual Memory: In Use: 5,925 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC2 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.137		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N64KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500 SerialNumber 5N63KN1 SerialNumber 00371-OEM-8992671-00524  Host Name: RA-PLOT6 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Product ID: 00371-OEM-8992671-00524 Original Install Date: 4/4/2013, 3:10:42 PM System Boot Time: 7/3/2014, 9:34:11 PM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3500 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333  Mhz BIOS Version: Dell Inc. A16, 7/6/2012 Windows Directory: C:\Windows

	System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume2 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska Total Physical Memory: 12,286 MB Available Physical Memory: 7,156 MB Virtual Memory: Max Size: 24,569 MB Virtual Memory: Available: 18,397 MB Virtual Memory: In Use: 6,172 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.142 [02]: fe80::3d87:5e9b:3eeb:ed12		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N63KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500 SerialNumber 5N65KN1 SerialNumber 00371-OEM-8992671-00524  Host Name: PLOT7 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Microsoft Product ID: 00371-OEM-8992671-00524 Original Install Date: 10/22/2010, 8:50:33 AM System Boot Time: 7/7/2014, 3:02:27 PM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3500

System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3333 Mhz BIOS Version: Dell Inc. A07, 4/12/2010 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume2 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska Total Physical Memory: 12,286 MB Available Physical Memory: 9,477 MB Virtual Memory: Max Size: 24,569 MB Virtual Memory: Available: 21,124 MB Virtual Memory: In Use: 3,445 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC2 [01]: 982861 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.163			
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	5N65KN1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3400
<i>Description</i>	Name Precision WorkStation T3400 SerialNumber 8DVFZF1 SerialNumber 00371-OEM-8992671-00524  Host Name: RA-PLOT8 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: CET



Registered Organization:  
 Product ID: 00371-OEM-8992671-00524  
 Original Install Date: 5/2/2013, 9:15:55 AM  
 System Boot Time: 7/10/2014, 12:51:36 AM  
 System Manufacturer: Dell Inc.  
 System Model: Precision WorkStation T3400  
 System Type: x64-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: Intel64 Family 6 Model 15 Stepping 11 GenuineIntel ~2992  
                   Mhz  
 BIOS Version: Dell Inc. A14, 4/30/2012  
 Windows Directory: C:\Windows  
 System Directory: C:\Windows\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: (UTC-09:00) Alaska  
 Total Physical Memory: 4,030 MB  
 Available Physical Memory: 2,905 MB  
 Virtual Memory: Max Size: 8,057 MB  
 Virtual Memory: Available: 6,577 MB  
 Virtual Memory: In Use: 1,480 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: noaas.rainier.oma.noaa.ship  
 Logon Server: \\RADC2  
 Network Card(s): 1 NIC(s) Installed.  
                   [01]: Broadcom NetXtreme 57xx Gigabit Controller  
                   Connection Name: Local Area Connection  
                   DHCP Enabled: Yes  
                   DHCP Server: 10.48.12.3  
                   IP address(es)  
                   [01]: 10.48.12.150  
                   [02]: fe80::ad2d:36d3:3bbc:f44d

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	8DVFZF1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500 SerialNumber CHDQVR1 SerialNumber 55041-007-1338661-86199  Host Name: RA-HOLODECK1

OS Name: Microsoft Windows 7 Enterprise  
 OS Version: 6.1.7601 Service Pack 1 Build 7601  
 OS Manufacturer: Microsoft Corporation  
 OS Configuration: Member Workstation  
 OS Build Type: Multiprocessor Free  
 Registered Owner: NOS  
 Registered Organization: NOS  
 Product ID: 55041-007-1338661-86199  
 Original Install Date: 1/4/2012, 6:41:25 AM  
 System Boot Time: 6/30/2014, 6:55:01 AM  
 System Manufacturer: Dell Inc.  
 System Model: Precision WorkStation T3500  
 System Type: x64-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3466  
                   Mhz  
 BIOS Version: Dell Inc. A11, 4/20/2011  
 Windows Directory: C:\WINDOWS  
 System Directory: C:\WINDOWS\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: (UTC-09:00) Alaska  
 Total Physical Memory: 12,286 MB  
 Available Physical Memory: 10,133 MB  
 Virtual Memory: Max Size: 24,569 MB  
 Virtual Memory: Available: 22,260 MB  
 Virtual Memory: In Use: 2,309 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: noaas.rainier.oma.noaa.ship  
 Logon Server: \\RADC2  
 Network Card(s): 1 NIC(s) Installed.  
                   [01]: Broadcom NetXtreme 57xx Gigabit Controller  
                   Connection Name: Local Area Connection  
                   DHCP Enabled: Yes  
                   DHCP Server: 10.48.12.3  
                   IP address(es)  
                   [01]: 10.48.12.143  
                   [02]: fe80::44c5:a5d9:65db:8e6f

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	CHDQVR1	55041-007-1338661-86199	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	Name Precision WorkStation T3500

SerialNumber  
 GV1WSR1  
 SerialNumber  
 00371-OEM-8992671-00524  
  
 Host Name: RA-HOLO2  
 OS Name: Microsoft Windows 7 Professional  
 OS Version: 6.1.7601 Service Pack 1 Build 7601  
 OS Manufacturer: Microsoft Corporation  
 OS Configuration: Member Workstation  
 OS Build Type: Multiprocessor Free  
 Registered Owner: let  
 Registered Organization:  
 Product ID: 00371-OEM-8992671-00524  
 Original Install Date: 5/15/2014, 4:05:24 PM  
 System Boot Time: 7/8/2014, 8:08:00 AM  
 System Manufacturer: Dell Inc.  
 System Model: Precision WorkStation T3500  
 System Type: x64-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3466  
                   Mhz  
 BIOS Version: Dell Inc. A12, 7/22/2011  
 Windows Directory: C:\Windows  
 System Directory: C:\Windows\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: (UTC-09:00) Alaska  
 Total Physical Memory: 12,286 MB  
 Available Physical Memory: 11,093 MB  
 Virtual Memory: Max Size: 24,569 MB  
 Virtual Memory: Available: 22,717 MB  
 Virtual Memory: In Use: 1,852 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: noaas.rainier.oma.noaa.ship  
 Logon Server: \\RADC1  
 Network Card(s): 1 NIC(s) Installed.  
                   [01]: Broadcom NetXtreme 57xx Gigabit Controller  
                   Connection Name: Local Area Connection  
                   DHCP Enabled: Yes  
                   DHCP Server: 10.48.12.3  
                   IP address(es)  
                   [01]: 10.48.12.135  
                   [02]: fe80::1574:411a:be55:c08f

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	GV1WSR1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	<p>Name Precision WorkStation T3500 SerialNumber GV1XSR1 SerialNumber 00371-OEM-8992671-00524</p> <p>Host Name: RA-HOLO3 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Product ID: 00371-OEM-8992671-00524 Original Install Date: 7/24/2011, 5:06:08 AM System Boot Time: 6/28/2014, 6:06:47 PM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3500 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3466 Mhz</p> <p>BIOS Version: Dell Inc. A12, 7/22/2011 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume1 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska Total Physical Memory: 12,286 MB Available Physical Memory: 8,233 MB Virtual Memory: Max Size: 24,569 MB Virtual Memory: Available: 19,901 MB Virtual Memory: In Use: 4,668 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es)</p>

	[01]: 10.48.12.134 [02]: fe80::7816:fe3d:fc1c:163f		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	GV1XSR1	00371-OEM-8992671-00524	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3400
<i>Description</i>	<p>Name Precision WorkStation T3400 SerialNumber FDVFZF1 SerialNumber 00371-OEM-9044641-20485</p> <p>Host Name: RA-HOL04 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: shawn.gendron Registered Organization: Product ID: 00371-OEM-9044641-20485 Original Install Date: 4/13/2011, 2:29:29 PM System Boot Time: 6/30/2014, 11:04:58 AM System Manufacturer: Dell Inc. System Model: Precision WorkStation T3400 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 15 Stepping 11 GenuineIntel ~2992 Mhz</p> <p>BIOS Version: Dell Inc. A08, 8/14/2008 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume2 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC-09:00) Alaska Total Physical Memory: 4,030 MB Available Physical Memory: 2,246 MB Virtual Memory: Max Size: 8,057 MB Virtual Memory: Available: 6,317 MB Virtual Memory: In Use: 1,740 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1</p>

	<p>[246]  Network Card(s): 1 NIC(s) Installed.  [01]: Broadcom NetXtreme 57xx Gigabit Controller  Connection Name: Local Area Connection  DHCP Enabled: Yes  DHCP Server: 10.48.12.3  IP address(es)  [01]: 10.48.12.144  [02]: fe80::a17b:478b:efed:d675</p>		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	FDVVFZF1	00371-OEM-9044641-20485	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3500
<i>Description</i>	<p>Name  Precision WorkStation T3500  SerialNumber  GV13TR1  SerialNumber  55041-007-1338661-86336</p> <p>Host Name: RA-HOLODECK5  OS Name: Microsoft Windows 7 Enterprise  OS Version: 6.1.7601 Service Pack 1 Build 7601  OS Manufacturer: Microsoft Corporation  OS Configuration: Member Workstation  OS Build Type: Multiprocessor Free  Registered Owner: NOS  Registered Organization: NOS  Product ID: 55041-007-1338661-86336  Original Install Date: 1/5/2012, 8:32:55 AM  System Boot Time: 6/25/2014, 2:22:31 PM  System Manufacturer: Dell Inc.  System Model: Precision WorkStation T3500  System Type: x64-based PC  Processor(s): 1 Processor(s) Installed.  [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3466  Mhz  BIOS Version: Dell Inc. A12, 7/22/2011  Windows Directory: C:\WINDOWS  System Directory: C:\WINDOWS\system32  Boot Device: \Device\HarddiskVolume1  System Locale: en-us;English (United States)  Input Locale: en-us;English (United States)  Time Zone: (UTC-09:00) Alaska  Total Physical Memory: 12,286 MB</p>

	Available Physical Memory: 7,102 MB Virtual Memory: Max Size: 30,711 MB Virtual Memory: Available: 24,848 MB Virtual Memory: In Use: 5,863 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RADC1 Network Card(s): 1 NIC(s) Installed. [01]: Broadcom NetXtreme 57xx Gigabit Controller Connection Name: Local Area Connection DHCP Enabled: Yes DHCP Server: 10.48.12.3 IP address(es) [01]: 10.48.12.127 [02]: fe80::e1ae:4a3:f8d5:48d7		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	GV13TR1	55041-007-1338661-86336	Processing

<i>Manufacturer</i>	Dell Inc.
<i>Model</i>	Precision WorkStation T3400
<i>Description</i>	Name Precision WorkStation T3400 SerialNumber GDVFZF1 SerialNumber 55041-007-1338661-86481  Host Name: RA-HYPACK OS Name: Microsoft Windows 7 Enterprise OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: Survey Registered Organization: Product ID: 55041-007-1338661-86481 Original Install Date: 8/21/2012, 02:07:16 System Boot Time: 7/10/2014, 23:38:06 System Manufacturer: Dell Inc. System Model: Precision WorkStation T3400 System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 15 Stepping 11 GenuineIntel ~3000  Mhz BIOS Version: Dell Inc. A13, 11/1/2011 Windows Directory: C:\Windows

System Directory: C:\Windows\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: (UTC) Coordinated Universal Time  
 Total Physical Memory: 4,030 MB  
 Available Physical Memory: 2,448 MB  
 Virtual Memory: Max Size: 10,073 MB  
 Virtual Memory: Available: 8,560 MB  
 Virtual Memory: In Use: 1,513 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: noaas.rainier.oma.noaa.ship  
 Logon Server: \\RA-HYPACK  
 Network Card(s): 3 NIC(s) Installed.  
     [01]: Realtek RTL8169/8110 Family PCI Gigabit Ethernet NIC  
 (NDIS 6.20)  
         Connection Name: PosMV Connection  
         DHCP Enabled: No  
         IP address(es)  
             [01]: 129.100.1.230  
             [02]: fe80::d0c9:681a:3b48:a764  
     [02]: Broadcom NetXtreme 57xx Gigabit Controller  
         Connection Name: Local Area Connection 2  
         DHCP Enabled: Yes  
         DHCP Server: 10.48.12.3  
         IP address(es)  
             [01]: 10.48.12.148  
             [02]: fe80::f877:994f:f309:6807  
     [03]: Realtek RTL8169/8110 Family PCI Gigabit Ethernet NIC  
 (NDIS 6.20)  
         Connection Name: Kongsberg Connection 3  
         DHCP Enabled: No  
         IP address(es)  
             [01]: 192.168.0.5  
             [02]: fe80::e506:d8cc:5344:110f

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	GDVFZF1	55041-007-1338661-86481	Acquisition

<i>Manufacturer</i>	Kongsberg
<i>Model</i>	EM710
<i>Description</i>	Name System Product Name SerialNumber 0356 SerialNumber 76487-OEM-0056532-90519



Host Name: EM710HWS  
 OS Name: Microsoft Windows XP Professional  
 OS Version: 5.1.2600 Service Pack 3 Build 2600  
 OS Manufacturer: Microsoft Corporation  
 OS Configuration: Standalone Workstation  
 OS Build Type: Multiprocessor Free  
 Registered Owner: User  
 Registered Organization:  
 Product ID: 76487-OEM-0056532-90519  
 Original Install Date: 7/7/2010, 2:10:23 AM  
 System Up Time: 0 Days, 0 Hours, 4 Minutes, 46 Seconds  
 System Manufacturer: System manufacturer  
 System Model: System Product Name  
 System type: X86-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: x86 Family 6 Model 26 Stepping 5 GenuineIntel ~2806 Mhz  
 BIOS Version: 022410 - 20100224  
 Windows Directory: C:\WINDOWS  
 System Directory: C:\WINDOWS\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: N/A  
 Total Physical Memory: 3,063 MB  
 Available Physical Memory: 2,717 MB  
 Virtual Memory: Max Size: 2,048 MB  
 Virtual Memory: Available: 2,007 MB  
 Virtual Memory: In Use: 41 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: WORKGROUP  
 Logon Server: \\EM710HWS  
 NetWork Card(s): 5 NIC(s) Installed.  
                   [01]: Marvell Yukon 88E8056 PCI-E Gigabit Ethernet Controller  
                           Connection Name: E1\_EM710PU\_157.237.2.30  
                           Status: Media disconnected  
                   [02]: Marvell Yukon 88E8056 PCI-E Gigabit Ethernet Controller  
                           Connection Name: Hypack\_MVP\_Network  
                           DHCP Enabled: No  
                           IP address(es)  
                           [01]: 192.168.0.1  
                   [03]: Intel(R) Gigabit ET Dual Port Server Adapter  
                           Connection Name: Shingledecker\_Local Area Connection E3  
                   [04]: Intel(R) Gigabit ET Dual Port Server Adapter  
                           Connection Name: Local Area Connection E4  
                   [05]: 1394 Net Adapter  
                           Connection Name: Ignore

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	0356	76487-OEM-0056532-90519	Acquisition

<i>Manufacturer</i>	Rolls-Royce Group ODIM Brooke Ocean
<i>Model</i>	MVP200 controller (Rainier)
<i>Description</i>	<p>Name System Product Name SerialNumber System Serial Number SerialNumber 76487-OEM-0028202-24565</p> <p>Host Name: MVP-CONTROLLER OS Name: Microsoft Windows XP Professional OS Version: 5.1.2600 Service Pack 3 Build 2600 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: MVP200 Registered Organization: Product ID: 76487-OEM-0028202-24565 Original Install Date: 10/29/2009, 7:29:23 PM System Up Time: 0 Days, 0 Hours, 1 Minutes, 43 Seconds System Manufacturer: System manufacturer System Model: System Product Name System type: X86-based PC Processor(s): 1 Processor(s) Installed. [01]: x86 Family 6 Model 23 Stepping 10 GenuineIntel ~2932 Mhz BIOS Version: A_M_I_ - 7000920 Windows Directory: C:\WINDOWS System Directory: C:\WINDOWS\system32 Boot Device: \Device\HarddiskVolume1 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: N/A Total Physical Memory: 2,047 MB Available Physical Memory: 1,681 MB Virtual Memory: Max Size: 2,048 MB Virtual Memory: Available: 2,007 MB Virtual Memory: In Use: 41 MB Page File Location(s): C:\pagefile.sys Domain: HYACK_EM710 Logon Server: \\MVP-CONTROLLER NetWork Card(s): 1 NIC(s) Installed. [01]: Realtek RTL8168C(P)/8111C(P) PCI-E Gigabit Ethernet NIC Connection Name: Local Area Connection DHCP Enabled: No</p>

	IP address(es) [01]: 192.168.0.3		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	unknown	76487-OEM-0028202-24565	Acquisition

<i>Manufacturer</i>	Gigabyte Technology Co., Ltd.
<i>Model</i>	unknown
<i>Description</i>	<p>RA3 hypack computer.</p> <p>Name To be filled by O.E.M. SerialNumber To be filled by O.E.M. SerialNumber 00371-OEM-8992671-00151</p> <p>Host Name: RA-3 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: survey Registered Organization: Product ID: 00371-OEM-8992671-00151 Original Install Date: 4/10/2014, 20:11:48 System Boot Time: 7/13/2014, 22:57:29 System Manufacturer: Gigabyte Technology Co., Ltd. System Model: To be filled by O.E.M. System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 45 Stepping 7 GenuineIntel ~3801 Mhz BIOS Version: American Megatrends Inc. F3 AM, 9/30/2013 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume1 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC) Coordinated Universal Time Total Physical Memory: 8,141 MB Available Physical Memory: 6,797 MB Virtual Memory: Max Size: 16,279 MB Virtual Memory: Available: 14,727 MB Virtual Memory: In Use: 1,552 MB Page File Location(s): C:\pagefile.sys</p>

	Domain: WORKGROUP Logon Server: \\RA-3 Network Card(s): 2 NIC(s) Installed. [01]: Intel(R) 82579LM Gigabit Network Connection Connection Name: PosMV Status: Media disconnected [02]: Realtek PCIe GBE Family Controller Connection Name: Reson DHCP Enabled: No IP address(es) [01]: 192.168.0.100 [02]: fe80::a8f9:ceab:889e:d8c3		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	unknown	00371-OEM-8992671-00151	Acquisition

<i>Manufacturer</i>	Supermicro
<i>Model</i>	X7DAL
<i>Description</i>	RA3 Reson computer  Name X7DAL SerialNumber 072409090012 SerialNumber 55274-OEM-0067564-96684  Host Name: RXP072409090012 OS Name: Microsoft Windows XP Professional OS Version: 5.1.2600 Service Pack 3 Build 2600 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: RESON Registered Organization: RESON Product ID: 55274-OEM-0067564-96684 Original Install Date: 9/24/2007, 9:01:19 AM System Up Time: 0 Days, 0 Hours, 1 Minutes, 43 Seconds System Manufacturer: Supermicro System Model: X7DAL System type: X86-based PC Processor(s): 2 Processor(s) Installed. [01]: x86 Family 6 Model 15 Stepping 11 GenuineIntel ~3000 Mhz [02]: x86 Family 6 Model 15 Stepping 11 GenuineIntel ~3000 Mhz  BIOS Version: PTLTD - 6040000 Windows Directory: C:\WINDOWS System Directory: C:\WINDOWS\system32 Boot Device: \Device\HarddiskVolume1

	System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: N/A Total Physical Memory: 2,047 MB Available Physical Memory: 1,711 MB Virtual Memory: Max Size: 2,048 MB Virtual Memory: Available: 2,006 MB Virtual Memory: In Use: 42 MB Page File Location(s): C:\pagefile.sys Domain: WORKGROUP Logon Server: \\RXP072409090012  NetWork Card(s): 2 NIC(s) Installed. [01]: Intel(R) PRO/1000 EB Network Connection with I/O Acceleration Connection Name: Reson_Top DHCP Enabled: No IP address(es) [01]: 192.168.0.200 [02]: Intel(R) PRO/1000 EB Network Connection with I/O Acceleration Connection Name: Reson_Bottom Status: Media disconnected		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	072409090012	55274-OEM-0067564-96684	Acquisition

<i>Manufacturer</i>	Gigabyte Technology Co., Ltd.
<i>Model</i>	unknown
<i>Description</i>	RA4 hypack computer  Name To be filled by O.E.M. SerialNumber To be filled by O.E.M. SerialNumber 00371-OEM-8992671-00151  Host Name: SURVEY-PC OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: Survey Registered Organization: Product ID: 00371-OEM-8992671-00151

Original Install Date: 3/20/2014, 3:10:17 PM  
 System Boot Time: 7/9/2014, 11:10:58 PM  
 System Manufacturer: Gigabyte Technology Co., Ltd.  
 System Model: To be filled by O.E.M.  
 System Type: x64-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: Intel64 Family 6 Model 45 Stepping 7 GenuineIntel ~3801  
                   Mhz  
 BIOS Version: American Megatrends Inc. F3 AM, 9/30/2013  
 Windows Directory: C:\Windows  
 System Directory: C:\Windows\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: (UTC) Coordinated Universal Time  
 Total Physical Memory: 8,141 MB  
 Available Physical Memory: 6,792 MB  
 Virtual Memory: Max Size: 16,279 MB  
 Virtual Memory: Available: 14,858 MB  
 Virtual Memory: In Use: 1,421 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: WORKGROUP  
 Logon Server: \\SURVEY-PC  
 Network Card(s): 2 NIC(s) Installed.  
                   [01]: Intel(R) 82579LM Gigabit Network Connection  
                   Connection Name: POSMV  
                   Status: Media disconnected  
                   [02]: Realtek PCIe GBE Family Controller  
                   Connection Name: Reson 7125  
                   DHCP Enabled: No  
                   IP address(es)  
                   [01]: 192.168.0.100  
                   [02]: fe80::8187:5954:1110:846c

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	unknown	00371-OEM-8992671-00151	Acquisition

<i>Manufacturer</i>	Supermicro
<i>Model</i>	X7DAL
<i>Description</i>	RA4 Reson computer  Name X7DAL SerialNumber 072409090012 SerialNumber 55274-OEM-0041045-59299

Host Name: RXP072409090012  
 OS Name: Microsoft Windows XP Professional  
 OS Version: 5.1.2600 Service Pack 3 Build 2600  
 OS Manufacturer: Microsoft Corporation  
 OS Configuration: Standalone Workstation  
 OS Build Type: Multiprocessor Free  
 Registered Owner: RESON  
 Registered Organization: RESON  
 Product ID: 55274-OEM-0041045-59299  
 Original Install Date: 9/24/2007, 9:01:19 AM  
 System Up Time: 0 Days, 0 Hours, 3 Minutes, 58 Seconds  
 System Manufacturer: Supermicro  
 System Model: X7DAL  
 System type: X86-based PC  
 Processor(s): 2 Processor(s) Installed.  
     [01]: x86 Family 6 Model 15 Stepping 6 GenuineIntel ~3000 Mhz  
     [02]: x86 Family 6 Model 15 Stepping 6 GenuineIntel ~3000 Mhz  
 BIOS Version: PTLTD - 6040000  
 Windows Directory: C:\WINDOWS  
 System Directory: C:\WINDOWS\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-us;English (United States)  
 Time Zone: N/A  
 Total Physical Memory: 2,047 MB  
 Available Physical Memory: 1,726 MB  
 Virtual Memory: Max Size: 2,048 MB  
 Virtual Memory: Available: 2,007 MB  
 Virtual Memory: In Use: 41 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: WORKGROUP  
 Logon Server: \\RXP072409090012  
  
 NetWork Card(s): 2 NIC(s) Installed.  
     [01]: Intel(R) PRO/1000 EB Network Connection with I/O  
     Acceleration  
         Connection Name: Reson\_Top  
         DHCP Enabled: No  
         IP address(es)  
         [01]: 192.168.0.99  
     [02]: Intel(R) PRO/1000 EB Network Connection with I/O  
     Acceleration  
         Connection Name: Reson\_Bottom  
         Status: Media disconnected

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	072409090012	55274-OEM-0041045-59299	Acquisition

<i>Manufacturer</i>	Gigabyte Technology Co., Ltd.
<i>Model</i>	unknown
<i>Description</i>	<p>RA5 hypack computer</p> <p>Name To be filled by O.E.M. SerialNumber To be filled by O.E.M. SerialNumber 00371-OEM-8992671-00151</p> <p>Host Name: RA-2802-RA5 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: LET Registered Organization: Product ID: 00371-OEM-8992671-00151 Original Install Date: 3/5/2014, 2:04:24 PM System Boot Time: 7/9/2014, 11:51:57 PM System Manufacturer: Gigabyte Technology Co., Ltd. System Model: To be filled by O.E.M. System Type: x64-based PC Processor(s): 1 Processor(s) Installed. [01]: Intel64 Family 6 Model 45 Stepping 7 GenuineIntel ~3801 Mhz</p> <p>BIOS Version: American Megatrends Inc. F3 AM, 9/30/2013 Windows Directory: C:\Windows System Directory: C:\Windows\system32 Boot Device: \Device\HarddiskVolume1 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (UTC) Coordinated Universal Time Total Physical Memory: 8,141 MB Available Physical Memory: 6,726 MB Virtual Memory: Max Size: 16,279 MB Virtual Memory: Available: 14,673 MB Virtual Memory: In Use: 1,606 MB Page File Location(s): C:\pagefile.sys Domain: WORKGROUP Logon Server: \\RA-2802-RA5 Network Card(s): 2 NIC(s) Installed. [01]: Intel(R) 82579LM Gigabit Network Connection Connection Name: POSMV Status: Media disconnected [02]: Realtek PCIe GBE Family Controller</p>



	Connection Name: Reson DHCP Enabled: No IP address(es) [01]: 192.168.0.100 [02]: fe80::e8da:3d62:b9f1:56dc		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	unknown	00371-OEM-8992671-00151	Acquisition

<i>Manufacturer</i>	Supermicro
<i>Model</i>	X8SAX
<i>Description</i>	<p>RA5 Reson computer</p> <p>Name X8SAX SerialNumber SN18343413083 SerialNumber 00371-OEM-9096506-35458</p> <p>Host Name: SN18343413083          OS Name: Microsoft Windows 7 Professional          OS Version: 6.1.7601 Service Pack 1 Build 7601          OS Manufacturer: Microsoft Corporation          OS Configuration: Standalone Workstation          OS Build Type: Multiprocessor Free          Registered Owner: Reson          Registered Organization: Reson          Product ID: 00371-OEM-9096506-35458          Original Install Date: 8/21/2013, 3:17:17 PM          System Boot Time: 7/9/2014, 11:53:02 PM          System Manufacturer: Supermicro          System Model: X8SAX          System Type: x64-based PC          Processor(s): 1 Processor(s) Installed.                            [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~3040 Mhz          BIOS Version: American Megatrends Inc. 2.0 , 9/17/2010          Windows Directory: C:\Windows          System Directory: C:\Windows\system32          Boot Device: \Device\HarddiskVolume1          System Locale: en-us;English (United States)          Input Locale: en-gb;English (United Kingdom)          Time Zone: (UTC) Coordinated Universal Time          Total Physical Memory: 6,135 MB          Available Physical Memory: 5,190 MB          Virtual Memory: Max Size: 12,269 MB          Virtual Memory: Available: 11,291 MB</p>

	Virtual Memory: In Use: 978 MB Page File Location(s): C:\pagefile.sys Domain: WORKGROUP Logon Server: \\SN18343413083 [01]: 982861 Network Card(s): 3 NIC(s) Installed. [01]: Intel(R) 82574L Gigabit Network Connection Connection Name: Local Area Connection(Right) Status: Media disconnected [02]: Intel(R) 82574L Gigabit Network Connection Connection Name: Local Area Connection 2(Left) DHCP Enabled: No IP address(es) [01]: 192.168.0.101 [02]: fe80::84fc:3f5c:62d2:a459 [03]: Cisco Systems VPN Adapter for 64-bit Windows Connection Name: Local Area Connection 3 Status: Hardware not present		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	18343413083	00371-OEM-9096506-35458	Acquisition

<i>Manufacturer</i>	Supermicro
<i>Model</i>	X8DA6
<i>Description</i>	RA6 hypack computer  Name X8DA6 SerialNumber 1234567890 SerialNumber 00371-OEM-9045055-18054  Host Name: RA6W7 OS Name: Microsoft Windows 7 Professional OS Version: 6.1.7601 Service Pack 1 Build 7601 OS Manufacturer: Microsoft Corporation OS Configuration: Standalone Workstation OS Build Type: Multiprocessor Free Registered Owner: user Registered Organization: Product ID: 00371-OEM-9045055-18054 Original Install Date: 9/2/2011, 20:46:40 System Boot Time: 7/13/2014, 22:17:40 System Manufacturer: Supermicro System Model: X8DA6 System Type: x64-based PC Processor(s): 2 Processor(s) Installed.

```

[01]: Intel64 Family 6 Model 26 Stepping 5 GenuineIntel ~2133
Mhz
[02]: Intel64 Family 6 Model 26 Stepping 5 GenuineIntel ~2133
Mhz
BIOS Version:      American Megatrends Inc. 2.0a  , 9/14/2010
Windows Directory: C:\Windows
System Directory:  C:\Windows\system32
Boot Device:       \Device\HarddiskVolume2
System Locale:     en-us;English (United States)
Input Locale:      en-us;English (United States)
Time Zone:         (UTC) Coordinated Universal Time
Total Physical Memory: 6,135 MB
Available Physical Memory: 4,918 MB
Virtual Memory: Max Size: 12,268 MB
Virtual Memory: Available: 10,930 MB
Virtual Memory: In Use: 1,338 MB
Page File Location(s): C:\pagefile.sys
Domain:            FREEWAVE
Logon Server:      \\RA6W7
[01]: 982861
Network Card(s):  3 NIC(s) Installed.
[01]: Intel(R) 82574L Gigabit Network Connection
      Connection Name: POSMv(top)
      Status:          Media disconnected
[02]: Intel(R) 82574L Gigabit Network Connection
      Connection Name: Reson(btm)
      DHCP Enabled:   No
      IP address(es)
      [01]: 192.168.0.200
      [02]: fe80::4cc2:505c:e14e:6ce7
[03]: Intel(R) PRO/1000 GT Desktop Adapter
      Connection Name: Freewave(card)
      Status:          Media disconnected
    
```

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	unknown	00371-OEM-9045055-18054	Acquisition

<i>Manufacturer</i>	Supermicro
<i>Model</i>	X8SAX
<i>Description</i>	RA6 Reson computer Name X8SAX SerialNumber 18343513086 SerialNumber 00371-OEM-9096495-67135

Host Name: SN18343513086  
 OS Name: Microsoft Windows 7 Professional  
 OS Version: 6.1.7601 Service Pack 1 Build 7601  
 OS Manufacturer: Microsoft Corporation  
 OS Configuration: Standalone Workstation  
 OS Build Type: Multiprocessor Free  
 Registered Owner: Reson  
 Registered Organization: Reson  
 Product ID: 00371-OEM-9096495-67135  
 Original Install Date: 8/26/2013, 8:53:50 AM  
 System Boot Time: 7/13/2014, 10:17:23 PM  
 System Manufacturer: Supermicro  
 System Model: X8SAX  
 System Type: x64-based PC  
 Processor(s): 1 Processor(s) Installed.  
                   [01]: Intel64 Family 6 Model 44 Stepping 2 GenuineIntel ~2912  
                   Mhz  
 BIOS Version: American Megatrends Inc. 2.0 , 9/17/2010  
 Windows Directory: C:\Windows  
 System Directory: C:\Windows\system32  
 Boot Device: \Device\HarddiskVolume1  
 System Locale: en-us;English (United States)  
 Input Locale: en-gb;English (United Kingdom)  
 Time Zone: (UTC) Coordinated Universal Time  
 Total Physical Memory: 6,135 MB  
 Available Physical Memory: 5,093 MB  
 Virtual Memory: Max Size: 12,269 MB  
 Virtual Memory: Available: 11,204 MB  
 Virtual Memory: In Use: 1,065 MB  
 Page File Location(s): C:\pagefile.sys  
 Domain: WORKGROUP  
 Logon Server: \\SN18343513086  
                   [01]: 982861  
 Network Card(s): 3 NIC(s) Installed.  
                   [01]: Intel(R) 82574L Gigabit Network Connection  
                   Connection Name: Local Area Connection(Right)  
                   DHCP Enabled: No  
                   IP address(es)  
                   [01]: 192.168.0.101  
                   [02]: fe80::714d:74a0:45a7:96a6  
                   [02]: Intel(R) 82574L Gigabit Network Connection  
                   Connection Name: Local Area Connection 2(Left)  
                   Status: Media disconnected  
                   [03]: Cisco Systems VPN Adapter for 64-bit Windows  
                   Connection Name: Local Area Connection 3  
                   Status: Hardware not present

<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	18343513086	00371-OEM-9096495-67135	Acquisition

<i>Manufacturer</i>	Rolls-Royce Group ODIM Brooke Ocean
<i>Model</i>	MVP30 controller (RA6)
<i>Description</i>	<p>Name OEM SerialNumber OEM SerialNumber 76487-OEM-0053312-67878</p> <p>Host Name: RA-MVP30 OS Name: Microsoft Windows XP Professional OS Version: 5.1.2600 Service Pack 3 Build 2600 OS Manufacturer: Microsoft Corporation OS Configuration: Member Workstation OS Build Type: Multiprocessor Free Registered Owner: Survey Registered Organization: NOAA Product ID: 76487-OEM-0053312-67878 Original Install Date: 9/16/2012, 10:02:51 AM System Up Time: 0 Days, 0 Hours, 8 Minutes, 30 Seconds System Manufacturer: OEM System Model: OEM System type: X86-based PC Processor(s): 1 Processor(s) Installed. [01]: x86 Family 15 Model 4 Stepping 9 GenuineIntel ~3200 Mhz BIOS Version: IntelR - 42302e31 Windows Directory: C:\WINDOWS System Directory: C:\WINDOWS\system32 Boot Device: \Device\HarddiskVolume1 System Locale: en-us;English (United States) Input Locale: en-us;English (United States) Time Zone: (GMT) Casablanca, Monrovia Total Physical Memory: 1,014 MB Available Physical Memory: 714 MB Virtual Memory: Max Size: 2,048 MB Virtual Memory: Available: 2,008 MB Virtual Memory: In Use: 40 MB Page File Location(s): C:\pagefile.sys Domain: noaas.rainier.oma.noaa.ship Logon Server: \\RA-MVP30</p> <p>NetWork Card(s): 2 NIC(s) Installed. [01]: Intel(R) PRO/1000 PL Network Connection</p>

	Connection Name: Local Area Connection Status: Media disconnected [02]: Intel(R) PRO/1000 PL Network Connection Connection Name: Local Area Connection 2 Status: Media disconnected		
<i>Serial Numbers</i>	<i>Computer s/n</i>	<i>Operating System</i>	<i>Use</i>
	10592	76487-OEM-0053312-67878	Acquisition

## A.7.2 Computer Software

<i>Manufacturer</i>	CARIS
<i>Software Name</i>	HIPS and SIPS (x64)
<i>Version</i>	8.1
<i>Service Pack</i>	n/a
<i>Hotfix</i>	7
<i>Installation Date</i>	2014-02-28
<i>Use</i>	Processing
<i>Description</i>	<p>CARIS HIPS and SIPS is a comprehensive bathymetric, seafloor imagery and water column data processing software. HIPS &amp; SIPS allows the user to convert raw hydrographic data into a usable format and then compute and apply all correctors. Data may then be visualized and manipulated by the user for analysis and cleaning. Automated data cleaning filters and algorithms assist the user in this process.</p>

<i>Manufacturer</i>	CARIS
<i>Software Name</i>	Notebook
<i>Version</i>	3.1.1
<i>Service Pack</i>	1
<i>Hotfix</i>	1
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Acquisition and Processing
<i>Description</i>	<p>Notebook allows for the quick collection of geo-referenced hydrographic object data and notes in the field. Both NMEA and Trimble formats are supported in CARIS Notebook which allows the user to obtain data directly from a GPS receiver. New S-57 objects can be added and proper S-57 attributes attached during collection. Field note descriptions can be attached to new marker objects as attributes. The newly digitized S-57 hydrographic objects can easily be brought directly into ENC production software.</p>

<i>Manufacturer</i>	CARIS
<i>Software Name</i>	BASE Editor (x64)
<i>Version</i>	4.0.3
<i>Service Pack</i>	n/a
<i>Hotfix</i>	3
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Processing
<i>Description</i>	CARIS Bathy DataBASE BASE editor allows the user to open all sources of data from historical BASE surfaces, S-57 shoreline files, raster charts to the latest high density multibeam survey in a single space. Once opened, these data can easily be simultaneously examined for consistency. Analysis tools to compare BASE surfaces in their common area ease junction and crossline comparisons. In addition the 3D fly-through offers an easy way to catch data fliers.

<i>Manufacturer</i>	Applanix
<i>Software Name</i>	POSPac MMS
<i>Version</i>	6.1.4553.15282
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Processing
<i>Description</i>	The Applanix POSPac Mobile Mapping Suite (MMS) is post-processing software designed to maximize the accuracy potential of the POS/MV (Position and Orientation System – Marine Vessels) system. Highly accurate position and orientation solutions from the GNSS and Inertial data logged to a POS MV system may be obtained despite periods of GNSS outages. Logged POS/MV files are imported into POSPac MMS for automatic analysis and quality checks. When available, data from Rainier installed base stations is also loaded once it receives an OPUS solution. If there is no user installed base stations to reference the acquired POS data to, reference station and precise ephemeris data may be imported from the internet. This produces a SBET (Smoothed Best Estimated Trajectories) file that may be applied in CARIS to produce superior position and attitude data.

<i>Manufacturer</i>	Applanix
<i>Software Name</i>	POSPac MMS
<i>Version</i>	7.0
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a

<i>Installation Date</i>	2014-06-25
<i>Use</i>	Processing
<i>Description</i>	The Applanix POSPac Mobile Mapping Suite (MMS) is post-processing software designed to maximize the accuracy potential of the POS/MV (Position and Orientation System – Marine Vessels) system. Highly accurate position and orientation solutions from the GNSS and Inertial data logged to a POS MV system may be obtained despite periods of GNSS outages. Logged POS/MV files are imported into POSPac MMS for automatic analysis and quality checks. When available, data from Rainier installed base stations is also loaded once it receives an OPUS solution. If there is no user installed base stations to reference the acquired POS data to, reference station and precise ephemeris data may be imported from the internet. This produces a SBET (Smoothed Best Estimated Trajectories) file that may be applied in CARIS to produce superior position and attitude data.

<i>Manufacturer</i>	NOAA (HSTP)
<i>Software Name</i>	Pydro
<i>Version</i>	14.6 r4716
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-05-01
<i>Use</i>	Processing
<i>Description</i>	Pydro is a special—purpose hydrographic GIS written by HSTP that provides important functionality for the quality control of NOAA hydrographic survey data. Pydro assists the hydrographer and cartographer in managing feature/object data in the context of other supporting/correlating data ("other" vector data, bathymetry, and raster data).

<i>Manufacturer</i>	HYPACK, Inc.
<i>Software Name</i>	Hypack 2013
<i>Version</i>	13.0.6.9
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Acquisition
<i>Description</i>	Hypack and the associated Hysweep software is the primary multibeam and singlebeam data acquisition software used aboard Rainier. Data from sonar, GPS and attitude sensors are logged to the hard drive while real time displays of launch position and sonar coverage are displayed on a digital chart.

<i>Manufacturer</i>	Kongsberg Maritime AS
---------------------	-----------------------



<i>Software Name</i>	SIS
<i>Version</i>	4.1.4
<i>Service Pack</i>	1
<i>Hotfix</i>	24.0
<i>Installation Date</i>	2015-01-15
<i>Use</i>	Acquisition
<i>Description</i>	Seafloor Information System (SIS) is produced by Kongsberg Maritime and is supplied as part of the EM710 multi-beam sonar system. This real time software is designed to be the user interface and real time data processing system for the EM710. All necessary sensor interfaces, data displays for quality control and sensor calibration, seabed visualization, data logging, and integrated seabed acoustical imaging capability (sidescan) are standard parts of the software. It operates under the Windows operating system in a rack mounted computer dedicated to control of the EM710.

<i>Manufacturer</i>	Applanix Corporation
<i>Software Name</i>	MV-POSView
<i>Version</i>	5.1.0.2
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Acquisition
<i>Description</i>	The MV-POSView controller program is used to configure and operate the POS MV attitude and positioning system. This program is also used to record the POS/MV .000 files used to produce the SBET files post-applied in CARIS to improve attitude and navigation.

<i>Manufacturer</i>	NOAA (HSTP)
<i>Software Name</i>	Velocipy
<i>Version</i>	14.6 r4689
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-07-11
<i>Use</i>	Acquisition
<i>Description</i>	Velocipy is a special purpose program written by HSTP to communicate with Sea-Bird sound velocity profiling equipment. With this software, CTD profilers can be initialized and after deployment have the raw conductivity, temperature and pressure data downloaded. These data are then processed into a form usable by CARIS in addition to an archival NODC format.

<i>Manufacturer</i>	UNH/CCOM
<i>Software Name</i>	CastTime
<i>Version</i>	n/a
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-03-01
<i>Use</i>	Acquisition
<i>Description</i>	<p>CastTime is an application that bridges the gap between sound speed profiling instrumentation and multibeam echosounder acquisition systems. It is designed to assist the hydrographer in deciding when he/she should make a sound speed cast and at what times the casts should be executed. Too few profiles can lead to poor data quality and too many can lead to unnecessary wear and tear on the MVP tow-fish cable and possibly loss of the instrument.</p> <p>CastTime starts with user input seed times for the minimum and maximum allowable times between casts. Using available cast information, surface sound speed, and water depth, CastTime calculates a real time predicted error for the outer beams of the sonar system and recommends a new cast only when the error threshold is surpassed. This allows for the maximum allowable time between casts without adversely affecting data quality.</p>

<i>Manufacturer</i>	UNH/CCOM
<i>Software Name</i>	SVP Editor
<i>Version</i>	1.0.3
<i>Service Pack</i>	n/a
<i>Hotfix</i>	n/a
<i>Installation Date</i>	2014-03-01
<i>Use</i>	Acquisition
<i>Description</i>	<p>SVP Editor is an application that processes MVP data for delivery to Kongsberg Maritime multibeam echosounders for ray bending corrections. The software, which supports import and export of several sensor and software formats, allows for interactive graphical data editing for removal of outliers and/or addition of points for vertical extrapolation. The World Ocean Atlas is used for vertical extrapolation of measured profiles such as the Kongsberg control software demands.</p> <p>Kongsberg Maritime's acquisition system (Seafloor Information System, or SIS) offers numerous network datagram input/output transmission protocols that allow SVP Editor integration. MVP casts, collected with prompting from CastTime, are processed and extrapolated with by SVP Editor and then transmitted automatically to SIS with little user intervention. SIS treats the incoming sound speed profiles</p>

just like any other sensor and the SV correctors are applied immediately to the echosounding data without further user interaction.
---

## A.8 Bottom Sampling Equipment

### A.8.1 Bottom Samplers

#### A.8.1.1 Unknown Unknown, but referred to as the “Nibbler”

<i>Manufacturer</i>	Unknown
<i>Model</i>	Unknown, but referred to as the “Nibbler”
<i>Description</i>	<p>The “Nibbler” is a foot-trip model clam shell style bottom sampler. This sampler is designed to collect unconsolidated sediments up to the size of small pebbles. The sampler is fabricated from sturdy bronze and stainless steel materials for trouble-free service in a marine environment.</p> <p>The “Nibbler” consists of a long threaded post surrounded by a strong compression spring that presses against the jaws at one end and an adjustable screw cap at the upper end. By turning this threaded cap the spring-compression is adjusted, changing the strength at which the jaws close. A shackle is attached through a hole on the top of the post and a line attached. Due to the small of this sampler, it is deployed by hand using a heavy duty fishing pole.</p> <p>Prior to deployment, the jaws are cocked open by manipulation of an internal triggering mechanism, internal to the jaws. Upon impact with the bottom, the tension is momentarily released on the clam shell jaws, disengaging the internal trigger, and allowing the spring-tensioned, hinged jaws to snap shut.</p>

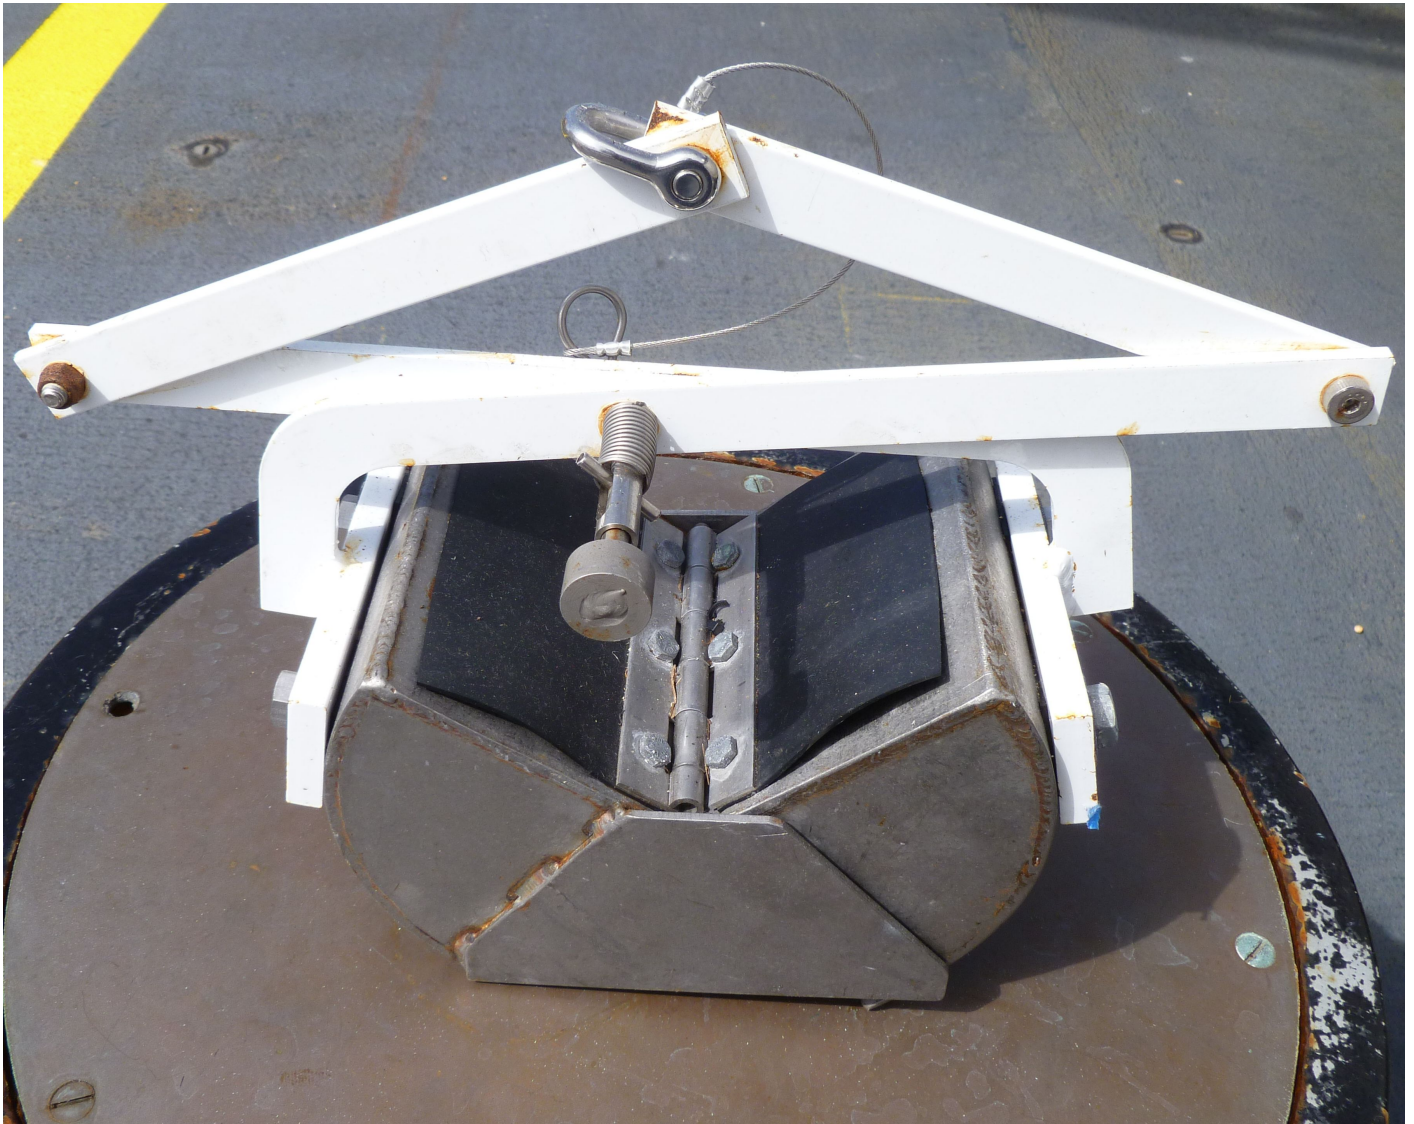


Figure 22: The “Nibbler” clam shell style bottom sampler.

#### A.8.1.2 AMS, Inc. 15 lb SST Dredge #445.10

<i>Manufacturer</i>	AMS, Inc.
<i>Model</i>	15 lb SST Dredge #445.10
<i>Description</i>	<p>The AMS 15 lb SST Dredge is a Ponar type grab sampler, a commonly used sampler that is very versatile for all types of bottom sediments such as sand, gravel and clay. This modified Van Veen type self-tripping sampler features center hinged jaws and a spring loaded trigger pin that releases when the sampler makes impact with the bottom. The sampler’s jaws are closed by the scissor action of the lever arms when the sampler is retrieved. The sampling area is 6" x 6".</p> <p>The sampler is constructed with stainless steel jaws and powder-coated carbon steel lever arms for corrosion resistance. It also includes an underlip attachment that cleans gravel from the jaws that would normally allow lateral loss of sample during retrieval. The top of the stainless steel sampling chamber has been cut with slits and covered with neoprene rubber flaps which allow water to flow through for a controlled descent and to reduce the frontal shock wave that may displace sediment as the dredge contacts the sample surface. This relatively lightweight model (1/8"</p>

stainless plate) is easily used from a small boat with nylon cable.



*Figure 23: The AMS 15 lb SST Dredge #445.10, a Ponar type grab sampler.*

## **B Quality Control**

### **B.1 Data Acquisition**

#### **B.1.1 Bathymetry**

### **B.1.1.1 Multibeam Echosounder**

Reson SeaBat 7125-B shallow water multibeam data are monitored in real-time using the Reson 7K Control Center online bathymetry data display. Adjustable user parameters common for Reson systems are range scale, power, gain, and pulse width. These parameters were adjusted as necessary to ensure the best bathymetric data quality. Additionally, vessel speed was adjusted as necessary, and in accordance with the NOS Specifications and Deliverables and Draft Standing Project Instructions, to ensure the required along-track coverage for object detection. Power, absorption and spreading settings may be adjusted to minimize over-saturation of backscatter data while maintaining bathymetric data quality by using the program Saturation Monitor as detailed in section B.1.7 of this report.

For the Rainier's Kongsberg EM 710 system, shallow water multibeam data were monitored in real-time with the acquisition software, SIS (Seafloor Information System). Data were displayed using 2-D and 3-D data display windows in the real-time screen display.

For launch acquisition, real-time coverage tools are now exclusively used to assess SWMB coverage in lieu of traditional pre-planned line files. During the planning stage, "bite sized" polygons were arranged to cover the entire survey area of each assigned sheet. These polygons were devised to fall within a similar depth range band so that they could be acquired at the proper resolution to find holidays as they occurred in the field. Polygons were also shaped to optimize running with the contours and not against them. Polygons covering deeper areas were planned to be larger than those covering shoaler areas. In general, polygons were sized such that a launch could expect to complete 3 to 5 polygons per day.

Once the polygons were drawn using MapInfo or Caris Notebook, they were exported as S-57 (.000) files or shape files since Hysweep can handle either format. Hysweep displays these polygons over the chart in addition to plotting the SWMB swath coverage as it is collected. This display of the real-time swath coverage is based upon the matrix file, a polygon with user defined geographic bounds and resolution set up prior to data collection. The resolution of the matrix is selected to match depth range of the polygon currently being worked on. The launch coxswain uses this matrix display to adjust the line as it is driven so that the swath currently being collected overlaps the grid of previously collected data. Any holidays are immediately evident in the field and can easily be filled in. This method of data acquisition saves time in both the pre-planning stage as well as greatly reducing the need for filling holidays during the subsequent rounds of data acquisition. In the event of any holidays found in post-processing, either traditional holiday lines, small polygons, or exported CARIS BASE surface GeoTIFFs may be used to fill them in.

For ship acquisition, a blended solution of line planning and real-time coverage is adopted. At the start of acquisition, a single line is drawn, which the ship navigates via Hypack. Throughout the line, the survey team notes the swath width and, based on these values, renders the subsequent survey line in such a way to provide ~10% overlap with the previous line. In this way, lines are used to minimize the number of turns and course adjustments required for the relatively un-maneuverable Rainier; while the real-time coverage is used to prevent excessive overlap or holidays based on an (ill-informed) a priori line plan.

Reson 7125 SV2 system timing / "roll-blowout" issue:

The two new RESON 7125 SV2 sonar systems installed aboard NOAA Ship Rainier launches 2802 and 2804 have exhibited three distinct, possibly related, issues. These issues were most prevalent on 2802, coming close to making that launch unusable. These three issues are:

**Loss of the timing synchronization:** Timing synchronization was frequently lost on the 7125 SV2 systems. This issues manifested in the 7k Control Center GUI in three ways: (1) as an alarm indicated by the red “ALARM” light in the main display window; (2) as an alarm in the Device Status Display of the I/O Module Setup tab; and (3) as a message in the Event Message Display window. It was reported that the occurrence of this alarm often corresponds to the “roll blowout” issue described below but it should be noted that this “roll blowout” most often occurs without a corresponding alarm . RESON claims that this alarm message is not important and unrelated to any of the other issues detailed below. RESON plans to remove this alarm and error messages in later releases.

**Loss of roll-stabilization:** A loss of roll-stabilization for the 7125 SV2 systems occurred with unpredictable frequency and in variable conditions during the course of survey operations. This issue manifested in the obvious ways: as a loss of roll stabilization in the HYPACK Swath window; a wavy surface in the HYPACK Multibeam Waterfall; and a loss of roll stabilization in the RESON 7k Center GUI as indicated by the “Roll Stab” indicator light in the upper right corner of the Primary Display window. This problem persists until the RESON Control Center is shut down and re-started.

**Data artifacts possibly related to timing and/or roll issues:** This issue is often referred to as a “roll blowout” or “roll timing failure” by members of the crew. This is an intermittent problem that occurs as a short burst of “bad” data before the system recovers and continues collecting good data. This problem manifests in multiple ways: it can be seen during the course of acquisition in the HYPACK Multibeam waterfall as a line of obviously bad data and when processed the data clearly shows evidence of the artifact in CUBE generated surfaces. The data artifact most often appears as a single slanted line of soundings, with the outerbeams of one side deeper and the outerbeams of the other side shoaler.

After much troubleshooting, the Reson 7125 SV2 system timing issue appears to have been fixed by applying the SV2 feature patch beta 6.1.0.1 provided by James Coleman from RESON. This patch was applied to 2802 on July 8. After a period of testing the same patch was applied to launch 2804 during the August mid-season layup in Kodiak.

Data collected during a loss of roll-stabilization is unsalvageable and rejected wholesale in Caris. Holidays in coverage are not a problem since this issue was easily recognized in the field and the problem data was re-run, often on the same day. Intermittent roll blowouts are also rejected but this cleaning could result in a small holiday if the gap was not caught while in the field and re-run.


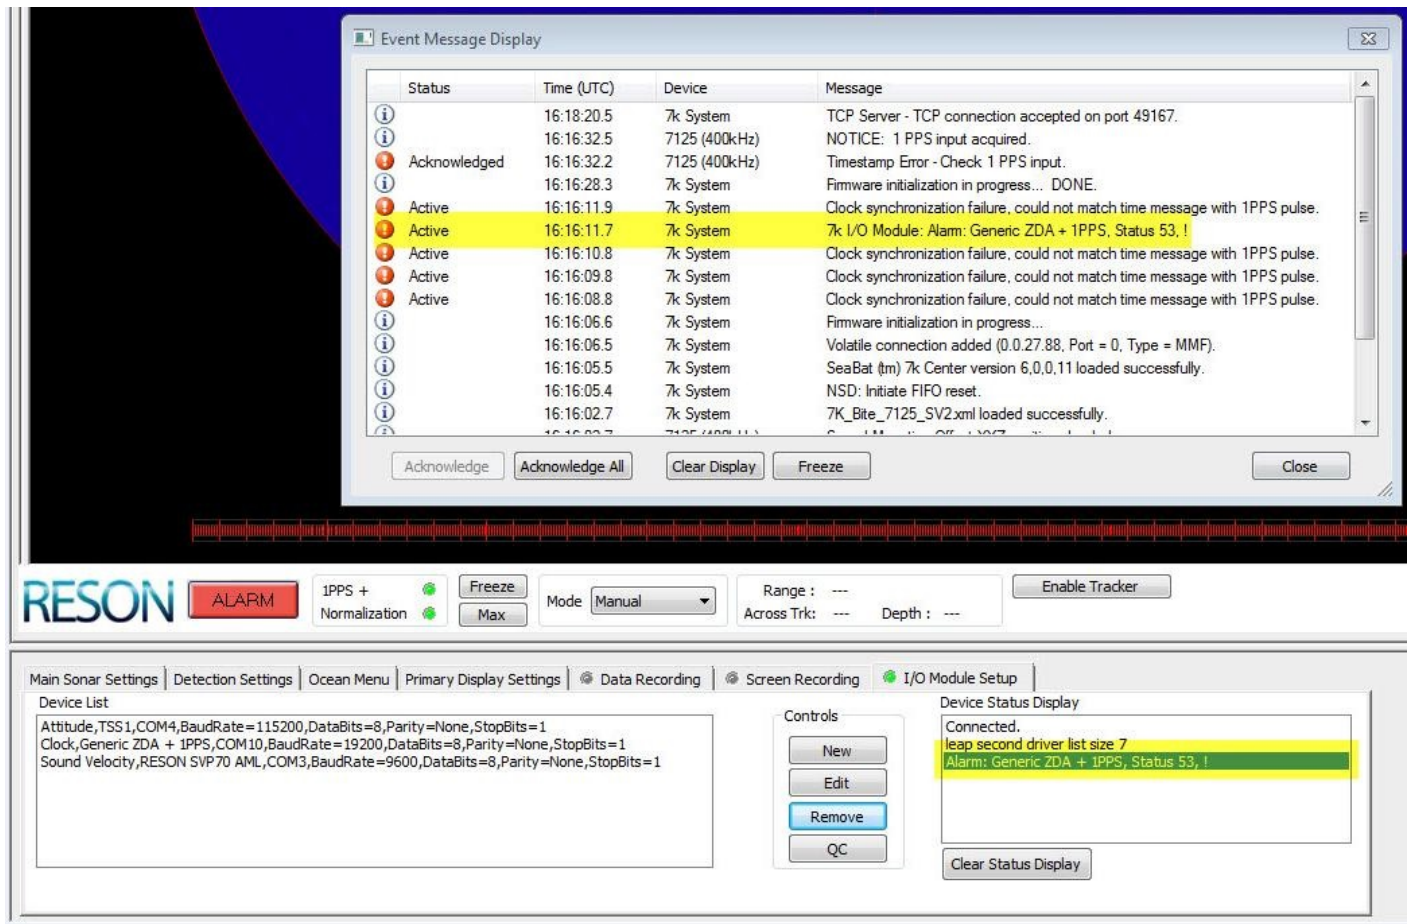


Figure 24: Loss of Timing Synchronization errors as seen in the Reson 7k Control Center GUI.



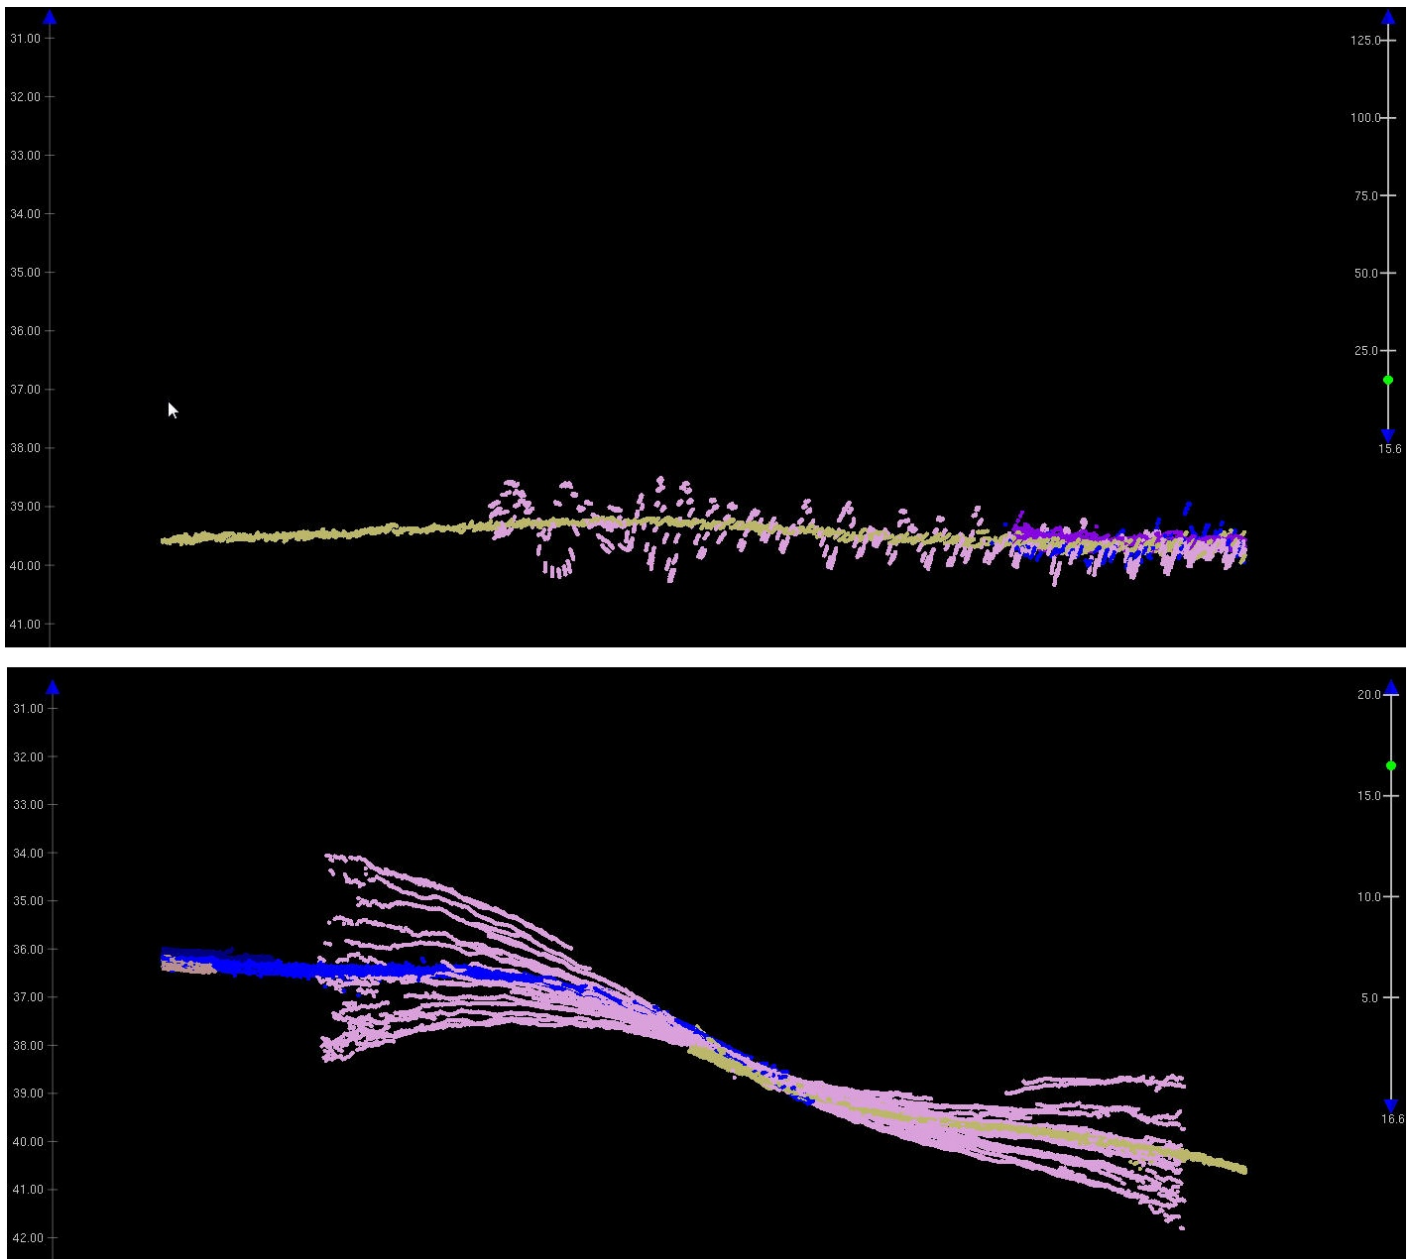

*Figure 25: Loss of roll-stabilization as seen in Caris subset editor, both along-track (top) and across-track (bottom).*

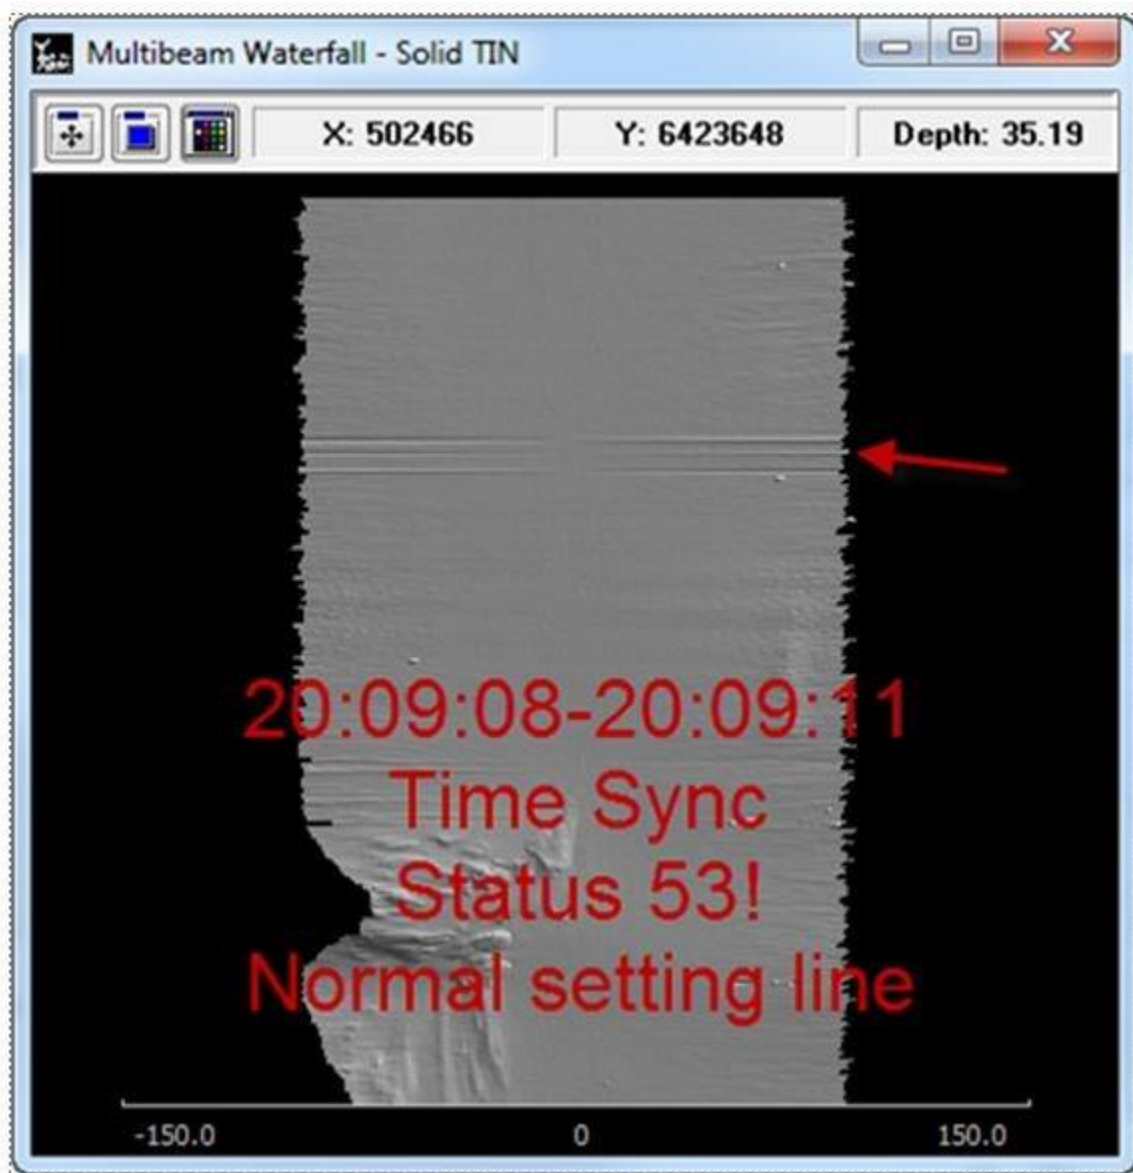


Figure 26: The “roll blowout” as seen during data acquisition in the waterfall display.

### B.1.1.2 Single Beam Echosounder

Single beam echosounder bathymetry was not acquired.

### B.1.1.3 Phase Measuring Bathymetric Sonar

Phase measuring bathymetric sonar bathymetry was not acquired.

## B.1.2 Imagery

### B.1.2.1 Side Scan Sonar

Side scan sonar imagery was not acquired.

### **B.1.2.2 Phase Measuring Bathymetric Sonar**

Phase measuring bathymetric sonar imagery was not acquired.

## **B.1.3 Sound Speed**

### **B.1.3.1 Sound Speed Profiles**

Rainier and her launches use the Sea-Bird SEACAT conductivity, temperature, and depth profiler (CTD) or the Rolls-Royce Moving Vessel Profiler (MVP) to acquire sound speed data.

All Rainier launches (2801, 2802, 2803, and 2804) are equipped with 24-volt electric winches attached to small swing-arm davits to deploy and recover Sea-Bird SEACAT profilers while the vessel is at rest. The rate at which the spool deploys line may be adjusted with a knob on the side of the winch which controls friction washers.

The NOS Hydrographic Surveys Specifications and Deliverables require a minimum of one cast every four hours. Casts were also conducted when changing survey areas, or when a change of conditions, such as a change in weather, tide, or current, would warrant additional sound velocity profiles. The launch crew also monitored the real-time display of the Reson SVP 71 for changes of 2 m/s or greater in the surface sound velocity indicative of the need for a new cast.

Velocipy software is used for both data processing and setting up Sea-Bird SEACAT instruments. Prior to deployment the SEACAT voltage is checked. The SBE 19plus should have a minimum of 9.5 volts and the SBE 19 should have a minimum of 7 volts. In the event of lower voltage readings, the instrument batteries were changed.

The site selected should be in the deepest portion of the project area expected to be surveyed. Before the instrument is placed in the water, the Hydrographer must ensure that the plastic tube covering the sensors has been removed.

When conducting SEACAT casts with the SBE 19, the 3-2-1 rule of thumb is followed. The instrument should be turned on and allowed to sit on deck for 3 minutes while the sensors settle and form baseline. The instrument is then set to soak just below the surface for 2 minutes. Finally the instrument is lowered at a rate of 1 meter/second.


When conducting SEACAT casts with the SBE 19plus, the instrument should be lowered and held just below the water's surface for about 1 minute to allow air to escape the salinity cell. After soaking the instrument, it should be lowered at a rate of 1 meter/second through the water column. In areas with lenses of fresh water or other complex sound speed variation near the surface, the instrument should be lowered slowly (in some cases, much less than 1 meter/second) through the first 5-10 meters of water in order to accurately sample the sound speed. After this initial decent, the instrument should proceed to drop at a rate of 1 meter/second.

The Moving Vessel Profiler (MVP) is an automated winch system that deploys a fish containing a sound

speed sensor by free fall. The fish is towed behind the survey vessel in a ready position that is marked by messengers attached to the tow cable. Ideally at survey speeds the fish is “flying” just above the depth of the sonar transducers. The specified depth deployed is selected by specifying a distance off the bottom (typically 10 meters). Once at the depth limit, the winch freefall is automatically stopped and the drag forces on the fish cause it to rise toward the surface due to the ship's forward motion. The cable slack is then pulled in by the winch to the towing position.

In the event of a particularly deep survey area or prior to the entire survey system being brought on-line, the MVP fish can be manually deployed while the ship is at rest using the hand-operated control box located on the winch. This method ensures that the maximum possible depth is obtained since the cable is deployed vertically. If necessary, during processing of later casts, the deep end of such a stationary cast can be tacked on to the end of shallower casts obtained while the ship is moving.

The fish can either be user-deployed or deployed automatically by the computer at a user defined time interval. Rainier uses the user-deployed method due to the danger of an automatic deployment taking place during a turn. Casts with the MVP are taken as often as every 15 minutes. This high frequency is due to the ease of collecting casts while losing no survey time stopping for a SEACAT cast. In addition there is also a need to better define the SV profile over larger horizontal distances covered since it is preferable to minimize turns while the MVP is deployed.

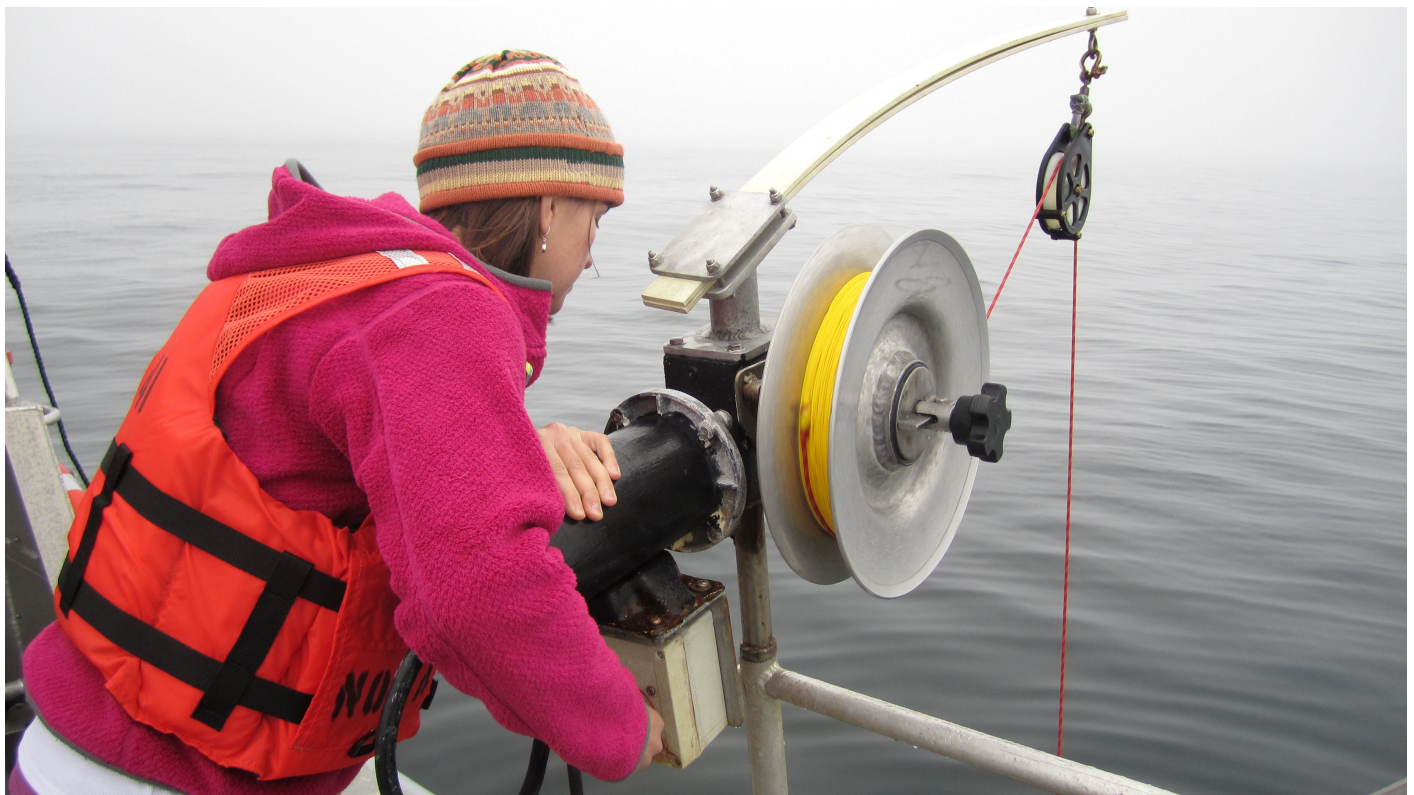

*Figure 27: The 24v electric SV winch mounted on all Rainier survey launches. Note the knob at the side of the spool which controls deployment speed.*

### **B.1.3.2 Surface Sound Speed**

Surface sound speed values are measured by a SVP 70 on Rainier and SVP 71 probes on all survey launches. These sound speed values are applied in real-time to all MBES systems to provide refraction corrections to flat-faced transducers.

## **B.1.4 Horizontal and Vertical Control**

### **B.1.4.1 Horizontal Control**

Rainier utilizes Post Processed Kinematic (PPK) methods for the horizontal positioning of bathymetric data. The exact method selected is based upon the availability, or lack thereof, of Continually Operating Reference Stations (CORS) near the project area. The three methods available in order of preference are 1) Smart Base, 2) Single Base, and finally 3) Precise Point Positioning (PPP).

Smart Base:

Smart Base is the preferred method when a minimum of four (six recommended) CORS stations are available for selection near the project area. In situations with a maximum baseline of 70 km, an optimal horizontal accuracy of 3-10 cm should be achieved.

Applanix POSPac software is used to produce a Smoothed Best Estimate of Trajectory (SBET) file. The SBET file consists of GPS position and attitude data corrected and integrated with inertial measurements and reference station correctors, exported into NAD83. The SBET is created using the Applanix proprietary “SmartBase” algorithm, which generates a Virtual Reference Station (VRS) on site from a network of established reference stations surrounding the project area, generally the Continually Operating Reference Station (CORS) network. Reference station data is downloaded with the POSPac MMS download tool and usually available within 24 hours. These SBET navigation and attitude files are applied to all lines in CARIS and superseded initial positioning and attitude data. For further details on the CORS network stations utilized in addition to processing methodology, refer to the HVCR of the appropriate project.

Single Base:

Due to the dearth of permanent GPS stations installed in the remote regions of Alaska a Smart Base solution utilizing multiple base stations is often not practicable. Single Base is the preferred method when there are not enough CORS stations to form a SmartBase network or when no CORS stations are available and Rainier personnel must establish a GPS base station. In a short baseline situation with a maximum baseline of 20-30 km to the control station, an optimal horizontal accuracy of <10 cm should be achieved.

The Single Base solution of processing SBETs requires the input of attitude data acquired by the POS/MV in addition to simultaneously collected base station data. Vessel kinematic data is post-processed using Applanix POSPac processing software, POSGNSS processing software and Single Base processing methods described in section B.2.4 of this report. These SBET navigation and attitude files are applied to all lines in CARIS and superseded initial positioning and attitude data. For further details on the CORS station(s) and/

or Rainier installed GPS base station(s) utilized in addition to processing methodology, refer to the HVCR of the appropriate project.

#### Precise Point Positioning:

Precise Point Positioning (PPP) is used as a last resort when Smart Base or Single Base is not available. This occurs when Rainier conducts survey operations far enough offshore that it is physically impossible to install a shore base station within the recommended 20km radius. Precise Point Positioning may also be used to cover data gaps and/or outages in data from a CORS station or a Rainier installed base station. When PPP is chosen, an optimal horizontal accuracy of 10-50 cm should be achieved.

#### Acquisition:

All real time position and attitude data are acquired using POSView and post processed using precise point positioning in POSpac MMS. For further details on individual processing methodology, refer to the HVCR of the appropriate project.

The Trimble NetR5 and NetR9 Global Navigation Satellite System (GNSS) reference station receivers used by Rainier collect data in raw .T01 or .T02 format. Data collection parameters are configured as per the “TRIMBLE NetR9 SETUP” document in Appendix IV of the FPM.

The POS/MV .000 files are collected individually by each launch daily, beginning at least five minutes before the collection of bathymetric data and ending at least five minutes after the conclusion of bathymetric data collection. Logging is started by opening the MV-POSView window and selecting “Ethernet Realtime...” from the Logging menu. In the Ethernet Realtime Output Control window only the following message groups are selected: 3, 7, 20, 102, 111 and 113. The Output Control rate is also set to ‘50 Hz’. It is also important not log through UTC Midnight on Saturdays, the end of the GPS week. In the event that a line would cross over UTC Midnight, Hypack/Hysweep logging and POS file logging is stopped and a new POS file with a new day number is started after UTC midnight.



*Figure 28: A Rainier base station installed in Kupreanof Strait, Kodiak Island, Alaska. Note the UHF antenna mounted on top of the 20 foot tower for extended range.*

### **B.1.4.2 Vertical Control**

All Rainier installed tide gauges conform to the data collection and transmission requirements as stated in section 4.2 of the Hydrographic Surveys Specifications and Deliverables (HSSD). Installation and documentation of the tide staff, benchmarks, bubbler orifice in addition to leveling requirements also conform to the HSSD as well as the User's Guide for GPS Observations At Tide and Water Level Station Bench Marks, Updated December 2009.

Requirements for the acquisition of water level data from subordinate tide gauge(s) is spelled out in the Hydrographic Survey Project Instructions. Most tide gauges assigned are subordinate "30-day" stations. As the name implies, data acquisition must be continuous for a 30-day minimum. Tidal data collection must begin at least 4 hours before the start of the hydrographic survey operations and continue 4 hours after the end of survey operations.

Each gauge installation at its most basic includes the tide gauge that is attached to a GOES antenna and a bubble orifice, a tide staff, and five benchmarks. For tide gauges, Rainier employs the CO-OPS supplied Portable Tide Gauge (PTG) system 9210B water level gauge as described in section A.6 of this report. Tide staffs consist of 2.5 meter long 2 x 4s with attached vitrified plastic scale and stainless steel staff stops. Benchmarks are standard sized NOS benchmarks made of red brass for superior weathering resistance.


Tide gauge sites assigned are either historic or new. If a historic gauge site is assigned, the Project Instructions package will include a written report of the gauge site and benchmark descriptions. Although there is no requirement to install the tide gauge and staff at their exact historic locations, every effort should be made to recover as many benchmarks as possible. All historic benchmarks must be reused for the tide station installation although replacement benchmarks may need to be installed to replace those missing. Some historic gauges have only three benchmarks installed, so two new marks need to be installed to bring the total up to the required five.

Instructions for new gauges include a proposed installation site, but this is not set in stone. Prior to actual installation, it is standard procedure to recon the immediate area and select the best potential site. After consultation with CO-OPS and if the new location is approved, the gauge is assigned a new seven-digit station identifier number.





*Figure 29: A Portable Tide Gauge (PTG) system with GOES and GPS antennae mounted on an aluminum tripod and a solar panel secured to the top of the gauge case.*

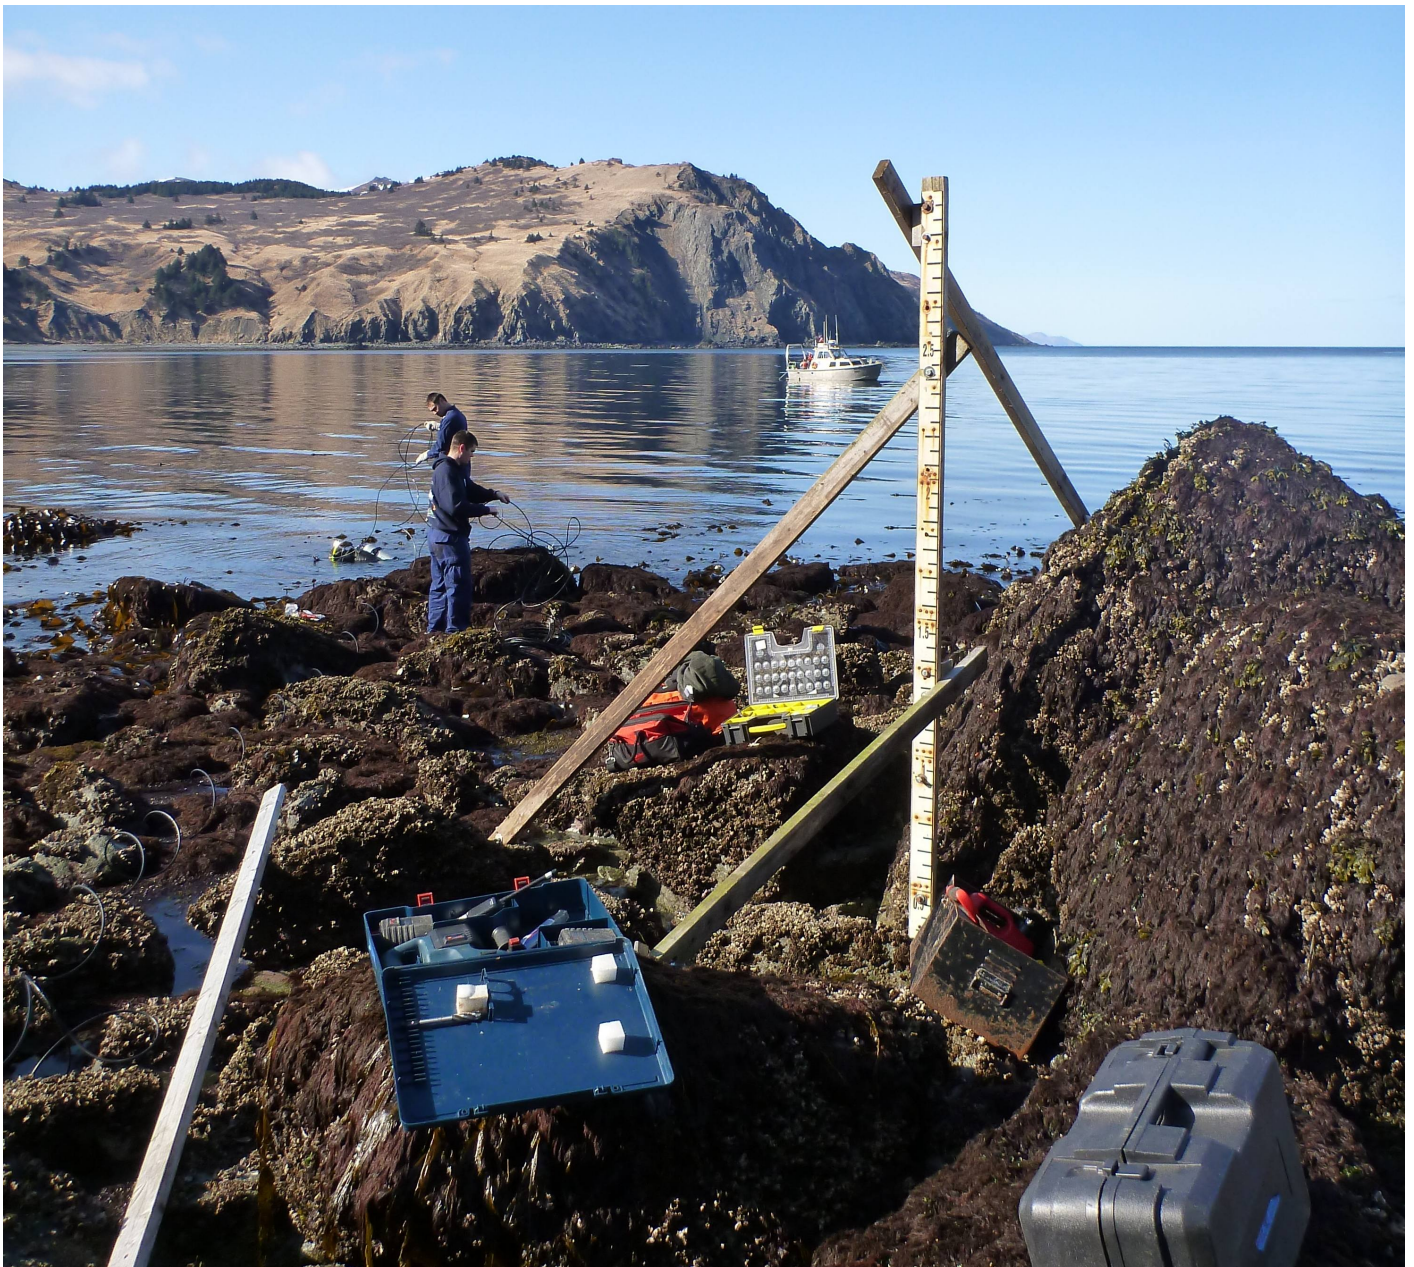

*Figure 30: An example of a typical Rainier tide staff.*

## **B.1.5 Feature Verification**

### Feature Data

Source shoreline data is typically supplied by N/CS31 in a single Composite Source file (CSF) in both S-57 .000 and .hob formats. Additionally, a Project Reference file (PRF) is supplied containing sheet limits, AWOIS items, and recommended bottom sample sites. The project-wide CSF file was trimmed to

each sheet's individual survey limits and saved as both HOB and S-57 .000 files by the survey managers. The .000 format is used for the real time acquisition display in Hypack on the survey launches. The HOB file was used in CARIS Notebook and printed to create paper boat sheets for reference and note-taking during shoreline verification operations. This process is described in detail in the "CARIS Notebook" section below.

Shoreline verification was conducted during daylight periods near MLLW. A line was run along the shore approximating the position of the Navigational Area Limit Line (NALL). Thick near-shore kelp often dictated the position of the NALL. In the absence of direction to the contrary, the NALL was the furthest offshore of the following:

- The 4m depth contour at MLLW.
- A line seaward of the MHW line by the ground distance equivalent to 0.8mm at the scale of the largest scale raster chart of the area.

This definition of the NALL is subject to modification by the Project Instructions, Chief of Party (Commanding Officer), or (in rare instances) Hydrographer-In-Charge of the survey launch.

Some likely additional reasons for modifying the position of the NALL included:

- Sea conditions such as kelp or breakers in which it was unsafe to approach shore to the specified distance or depth.
- Regular use of waters inshore of this limit by vessels navigating with NOAA nautical chart products. (This does not include skiffs or other very small craft navigating with local knowledge.)

As the approximate NALL line was run along the shore, the hydrographer both annotated the shoreline reference document and scanned the area for features to be addressed. All features with CARIS Notebook custom attribute "asgmt" populated with 'Assigned' offshore of the NALL were fully investigated. 'Assigned' features inshore of the NALL were verified or DP'd for height if exposed but launches did not navigate inshore of the NALL to either disprove or investigate potential submerged 'Assigned' features. Features were addressed in the following manner:

- Seaward of the NALL:
  - A feature found within 2mm at survey scale of the composite source position had its height/depth determined.
  - A feature outside 2mm at survey scale of the composite source position had its field position revised in addition to a heights/depth determination.
  - Features with any linear dimension greater than 1mm at survey scale were treated as an area and delineated.
  - New features not in the Composite Source file.
  - AWOIS items and other features specifically identified for investigation.
- Inshore of the NALL:
  - Navigationally significant features only, as defined below.

Navigationally Significant features were defined as the following:

- All features within the limits of safe navigation (i.e., offshore of the NALL).
- Features inshore of the NALL which:
  - are sufficiently prominent to provide a visual aid to navigation (landmarks). Note that rocks awash are almost never landmarks, but distinctive islets or other features visible at MHW can be useful for visual navigation.
  - significantly (a ground unit distance equivalent to 0.8mm at the scale of the largest scale chart of the area) deflect this limit. Common examples of these features include foul areas and large reef/ledge structures.
  - are man-made permanent features connected to the natural shoreline (such as piers and other mooring facilities) larger than the resolution specified for the survey. Seasonal features will be evaluated by the Command.
  - are man-made permanent features disconnected from the shoreline, such as stakes, pilings, and platforms, regardless of size.

Small, private mooring facilities (piers and buoys) suitable for pleasure craft were not generally considered navigationally significant. Areas with a high density of mooring buoys for these vessels were delineated, but the features themselves not individually positioned.

Terminology used for field annotation of the shoreline reference document during shoreline verification was as follows:

“Noted”

- The existence of a feature and its characteristics were confirmed from a distance, and its position appeared to be correct within the scale of the chart or source.
- Appropriate for features inshore of the limit of hydrography and not navigationally significant, significant features that require no further investigation, or features unsafe to approach to verify position within survey scale.
- Noted features were annotated on the shoreline reference document but carried no further forward in the processing pipeline. A "noted" annotation on a feature is not included in the H-Cell and adds little to PHB's current evaluation and verification process.

“ Verified ”

- The feature's position and characteristics were acquired and recorded either by directly occupying the site, or by applying a range and bearing offset to a known position. Positioning was generally by DGPS methods.
- Appropriate for navigationally significant features inshore of the limits of hydrography. Also appropriate for existing features that do not require a height (VALSOU or HEIGHT attribute).

“DP for Height”

- The feature's source position is correct, but height (VALSOU or HEIGHT attribute) was either unknown or incorrect. This position does not supersede that of the source data, so it is only necessary to approach the feature as closely as required to accurately estimate the height.
- Appropriate for source features found within 20m of their source positions, but with incorrect or missing height or depth data.

#### “New”

- The feature’s position and attributes (including height) were acquired and recorded either by directly occupying the site, or by applying a range and bearing offset to a known position. Positioning was generally by DGPS methods.
- Appropriate for items seaward of the NALL that are not present in the Composite Source.
- Items inshore of the NALL which are navigationally significant and are not present in source data.

#### “Not Seen”

- The feature was present in source data (chart, DCFF, etc.) but was not visually observed in the field. Full disproof search (see below) was not conducted.
- Appropriate for:
  - Features above MHW, the absence of which can be proven visually from a distance.
  - Source features inshore of the limit of hydrography which are not observed, but whose presence on or absence from the survey will not affect safe navigation.
  - Any feature from source which was not seen, but for which full disproof search (see below) is impractical or unsafe.

#### “Disproved”

- The feature was present in source data, but was not located after a full search. “Full Search” means SWMB, VBES, SSS, and/or Detached Position coverage of the area which conclusively shows that the item is not located at the position given to the accuracy and scale of the source document.

The primary purpose of detached positions (DPs) is to verify and define shoreline features (ex: rocks, reefs ledges, piles), disprove charted features, position navigational aids and landmarks (ex: buoys, beacons, lights), and mark positions of bottom samples. Point features were captured in the field as attributed S-57 objects in CARIS Notebook. Any line objects, such as small piers or foul areas were digitized directly into CARIS Notebook while in the field. Concurrent with the acquisition of these features, digital photographs were taken of most objects which were exposed above the waterline.

The survey vessel’s track may also be used to delineate area features, such as reefs, ledges, or foul areas. Where it is safe to approach these features to within the specified horizontal accuracy requirement, this method can produce a more accurate and efficient representation of large features than would be provided by multiple DPs on the extents.

On occasions when the conditions are right, a SWMB launch may end up surveying close to the inshore survey limits and end up collecting a significant number of soundings inshore of the NALL. Any additional soundings collected inshore of the NALL were processed as follows:

- “Good” seafloor is not rejected anywhere. Any bad soundings are cleaned out to make the surface represent the seafloor, but there is no cut-off of soundings shoaler than the 4-meter or 0-meter curves. Negative soundings are fine so long as they accurately represent the bottom.
- No launch is to go inside the NALL line trying for the 0-meter curve, or developing items that are found outside the survey limits (i.e. NALL line)
- For cultural features (pilings, piers, buoy's and buoy chains, etc.) that are above MLLW (i.e. negative

sounding) AND on the CSF HOB layer, all soundings on the cultural item are deleted. This technique will prevent the BASE surface from being pulled up on features already charted above MLLW in the HOB file.

- For cultural features that are below MLLW, the shoalest sounding is designated (which the BASE surface will honor) AND the feature is included on the field verified HOB file.
- For cultural features that are above MLLW and are not on the field verified HOB file, the least depth is flagged as "outstanding," but not included in the BASE surface and all other data on the object is rejected. In this case, the "outstanding" sounding is used as a basis for creating a new feature in the field verified HOB, but it will not affect the BASE surface. This is accomplished by using the option in BASE surface creation to not include outstanding soundings. Alternatively, in the case of area-type cultural features, all depths may be temporarily retained and the resultant DTM used to digitize the feature. Once digitization is complete, all soundings on the cultural item are deleted.
- Rocks and reefs are treated as "seafloor." No data is rejected on rocks, reefs or ledges, even above MLLW. The primary method of getting heights on rocks will remain "leveling" (aka eyeballing) during traditional shoreline, but if a least depth of a rock is obtained with SWMB, it will be designated and the height/depth will be used as the VALSOU in the CSF HOB. As previously stated, launches will not go inshore of the NALL line trying to get these data, but it will not be discarded if they are obtained. In cases where the echosounder data does not get the least depth, the soundings obtained will be left in the surface and a DP (or previously acquired comp source data) will be used for the feature.

Following acquisition, digital photos were renamed with an unique ID and moved into a single folder. Any required application of tide and SV corrections are performed in CARIS Notebook.

#### S-57 Attribution

With the advent of custom CARIS support files supplied by HSTP, Caris Notebook, Bathy DataBase, and Plot Composer now supports feature flags previously available only in Pydro. All feature flagging can now be accomplished in CARIS Notebook while Pydro is relegated to generating reports.

Features are selected for investigation by HSD OPS based on distance from MHW. Project Instructions require that "All features with attribute asgmt populated with 'Assigned' shall be verified even if they are inshore of NALL."

No Rainier launches ventured inshore of the NALL, even for assigned investigation items, when there was a question of safety or potential equipment damage. If the feature in question was exposed, time and height attributes were assigned while driving past. If the feature was not evident while driving the NALL during shoreline verification, a remark of "inshore of NALL not investigated" was made with a recommendation of retain as charted.

Feature attribution was completed for all 'Assigned' and any newly discovered items. Unassigned features were left untouched.

Submerged features, such as wrecks and submerged piles designated in CARIS may also be brought into

Notebook for attribution.

All features marked as “primary” were edited to have their object/attribute instances describe each feature as completely as possible. Object attributes assigned to each feature conform to direction located within both the Field & Processing Branch Features Encoding Guide v1.3 and the CARIS “IHO S-57/ENC Object and Attribute Catalogue”. S-57 attribution is not required for those features flagged as "secondary" nor for unassigned features.

NOAA specific attribution in Notebook includes “descrp” with a drop-down menu which is edited to reflect the hydrographer recommendations as follows:

- descrp - new -- A new feature was identified during survey operations. The hydrographer recommends adding the feature to the chart. Also, in cases in which the geographic extents/position of an existing object were modified; the newly proposed feature was characterized as "new", while the original feature was flagged as "delete".
- descrp - update -- The feature was found to be portrayed incorrectly on the chart. Update is also used in the case where the feature was found to be attributed incorrectly or insufficiently and is modified to reflect the additional or corrected attribution.
- descrp - delete -- The feature was disproved using approved search methods and guidelines. The hydrographer recommends removing it from the chart. Also, in cases in which the geographic extents and/or position of an existing object were modified; the newly proposed feature was characterized as "new", while the original feature was flagged as "delete".
- descrp - retain -- The feature was found during survey operations to be positioned correctly and no additional attribution was required. The hydrographer recommends retaining the feature as charted.
- descrp – not addressed -- The feature was not investigated during shoreline acquisition, typically because it was either inshore of the NALL or unsafe to approach. The hydrographer recommends retaining the feature as charted.

Features described as "new" and "update" are updated with the SORIND/SORDAT attribution of the current survey.

Features described as "delete", "retain", and "not addressed" have their SORIND/SORDAT attribution remain unchanged.



*Figure 31: Survey skiff RA7 collecting the along-shore buffer line using a Trimble GPS backpack system connected to a Toughbook computer.*

### **B.1.6 Bottom Sampling**

Typically headquarters provides the field unit with a number of recommended bottom sample sites included as part of the shoreline project reference file (PRF). These proposed sample sites, which are encoded as S57 springs, are examined by the command and potentially culled based on the actual depths found during survey operations or added to based on good anchorage positions located by the ship.

Samples are collected by launch using one of the two bottom samplers described in the equipment section of this report. Once obtained, samples are analyzed for sediment type and classified with S57 attribution using CARIS Notebook, with the most prevalent sediment type listed first. In the event that no sample is obtained after three attempts, the sample site NATSUR is characterized as “unknown”. Samples are then discarded after field analysis is complete.

### **B.1.7 Backscatter**

Current guidance from the Field Procedures Manual calls for field units to acquire and submit multibeam



backscatter data in snippet mode whenever feasible. Reson “snippets” imagery are recorded at acquisition and are present in the raw data, but not processed or analyzed. Snippet data contains the amplitude data of each individual sonar beam in a swath, but there are problems, well-documented in the hydrographic literature, that reduces the efficacy of processing these data.

When tuned to collect the optimal bathymetric data, Reson sonar systems tend to over-saturate the return signal and thus limit its value in terms of backscatter. In an attempt to alleviate this problem Saturation Monitor (SatMon) was developed by Glen Rice based on thesis work by Sam Greenaway with the goal of producing consistent and high quality backscatter data without adversely affecting the collection of bathymetric data. SatMon is a bundle of python code developed in-house as part of the Pydro software suite and is intended to aid the sonar operator in estimating the saturation state of the receiver of a Reson 7k series multibeam sonar.

SatMon is run simultaneously with the Reson data acquisition software during survey operations and displays “Beam vs Percent Nonlinear.” This plot displays by beam the received magnitude relative to the maximum allowable magnitude for the applied gain. While monitoring bottom detection quality with Reson, the sonar operator also makes every attempt to keep the saturation monitor histogram below the red line and also below the yellow line when possible. By adjusting Reson power the whole histogram can be raised and lowered. Adjusting absorption and spreading settings in Reson will help push up or down the outer beams.

Backscatter data are collected by default with the Rainier's EM710.

## **B.1.8 Other**

No additional data were acquired.

## **B.2 Data Processing**

### **B.2.1 Bathymetry**

#### **B.2.1.1 Multibeam Echosounder**

Following acquisition, multibeam sonar data were processed using the CARIS HIPS and SIPS Batch Processor. The batch processor runs a user defined script which accomplishes the following standard tasks without user intervention:

1. Convert the “raw” Reson or SIS data to the HDCS data format.
2. Load True Heave (referred to as Delayed Heave in CARIS)
3. Load predicted tides.

4. Load and apply sound velocity files.
5. “Merge” data to apply position, attitude, vessel offsets, and dynamic draft correctors to bathymetry and compute the corrected depth and position of each sounding.
6. Compute Total Propagated Uncertainty (TPU).
7. Filters may be applied to the data after checking with the sheet manager if specific data issues exist. If used, data is filtered according to the following criteria:

- Reject soundings with poor quality flags, (0 for Reson).
- Reject soundings with TPU greater than the horizontal and vertical error limits specified in the NOS Hydrographic Surveys Specifications and Deliverables:

Horizontal Error >  $\pm(5m + 5\%$  of depth)

Vertical Error >  $\pm\text{SQRT}(a^2+(b*d)^2)$  , where “a” and “b” are defined as

- in depth ranges 0-100m, a=0.500 b=0.013
- in depth ranges > 100m, a=1.000 b=0.023

8. Add data to the master “QC” field sheet encompassing the entire survey.

- “QC” Field Sheet naming convention: Hxxxxx\_QC (e.g., H12345\_QC)
- BASE surfaces are created in accordance with the depth ranges set forth in table below.

It has been the experience aboard Rainier that CUBE surfaces of differing resolutions that cover the same dataset may produce widely different results. In an effort to eliminate this problem, cube surface resolution values of 1, 2, 4, 8,16 and 32 meters were chosen. On occasion a 0.5m CUBE surface is utilized in areas of rocky or uneven bottom when the default surface does not well represent all of the shoal points. Since these resolution values are even multiples, all of the surfaces produced for a given field sheet will have the nodes of all surfaces co-located.

The following options are selected when CUBE surfaces were created:

- Surface Type – CUBE
- IHO S-44 Order – Order 1a
- Include status – check Accepted, Examined and Outstanding
- Disambiguation method - Density & Locale (this method selects the hypothesis that contains the greatest number of soundings and is also consistent with neighboring nodes).
- Advanced Configuration – As per the figure below and dependent upon the surface resolution.

After consultation with the sheet manager, preliminary data cleaning may be performed on “QC” field sheet. Each surface is masked to the appropriate depth range for its resolution using the attribute filter found in the “properties” of the depth layer. The Attribute Filter is enabled by selecting the check box. The filter is set by checking on the button and changing the expression to read “Depth >X AND Depth <Y” where X= min depth for the resolution and Y= max depth for the resolution. E.g. a 2 m resolution surface would get the expression: Depth >18 AND Depth <40.

Preliminary data cleaning is performed daily using “QC” field sheet CUBE surface as a guide for "directed

editing". Typically the night processing crew only cleans out the most blatant of fliers and blow-outs, leaving the final cleaning to the sheet manager. Depth, Standard Deviation, Hypothesis Strength and Hypothesis Count models derived from the boat-day surface are viewed with appropriate vertical exaggeration and a variety of sun illumination angles to highlight potential problem areas. Based on this analysis the most appropriate cleaning method is selected as follows:

- Subset Mode is the default tool selected due to its ability to quickly compare large numbers of soundings with adjacent or overlapping data for confirmation or rejection. Subset mode also excels with the assessment of possible features, disagreement between overlapping lines, and crossline comparison. The image designer can be used to visually enhance patterns and anomalies in CUBE surfaces, especially the standard deviation CUBE surface.
- Swath Editor is useful for burst noise, multipath, and other "gross fliers" which are specific to a particular line or lines, and most easily removed in this mode. Additionally, when it was felt that the quality of the data was reduced due to environmental conditions such as rough seas or extreme variance in sound velocity, data were filtered on a line by line basis to a lesser swath width to ensure data quality.
- Both modes (but particularly Swath Editor) are used as a training aid to help novices learn how the various sonars operate, and provide feedback to the acquisition process.

With the advent of CUBE-based processing, it has become possible to adjust the final bathymetric surface directly by selecting the correct hypothesis to use. Although this method is available, it is not "allowed" according to HSD and it is standard practice on *Rainier* to clean soundings in the traditional method until the CUBE algorithm selects the correct hypothesis.

Once all the data from all launches is cleaned based on the depth range to which they will be finalized, the "QC" field sheet CUBE surfaces are examined to ensure bottom coverage and plan additional lines or polygons to fill "holidays". In addition, the "QC" field sheet is used to compare adjacent lines and crosslines, for systematic errors such as tide or sound velocity errors, sensor error, sonar errors (consistent bad beams), vessel configuration problems, and noise. Any irregular patterns or problems are reported immediately to the FOO and the Survey Manager so that remedies can be found and applied before more data are acquired.

A coarse 4m resolution "Launch" BASE surface may also be maintained for use in the survey launches during data acquisition. The 4m resolution was selected to maintain smaller, easily transportable GeoTiff files.

- Naming convention is Hxxxxx\_4m\_DNxxx.
- The surface is created as a single resolution CUBE surface at 4m resolution.
- The CUBE surface is colored using a standardized custom *Rainier* generated CARIS Colour Range table.
- The color pallet selected is intended to aid swift navigation over previously surveyed areas in addition to highlighting shallow areas.

<b>Depth Range Filtering</b>	<b>CUBE Surface Resolution</b>	<b>BASE surface Advanced Options Configuration</b>
0-20 m	1 m	NOAA_1m
18-40 m	2 m	NOAA_2m
36-80 m	4 m	NOAA_4m
72-160 m	8 m	NOAA_8m
144-320m	16 m	NOAA_16m
288-> m	32 m	NOAA_32m

*Figure 32: Depth range vs. CUBE surface resolution.*

### **B.2.1.2 Single Beam Echosounder**

Single beam echosounder bathymetry was not processed.

### **B.2.1.3 Phase Measuring Bathymetric Sonar**

Phase measuring bathymetric sonar bathymetry was not processed.

### **B.2.1.4 Specific Data Processing Methods**

#### **B.2.1.4.1 Methods Used to Maintain Data Integrity**

see section B.2.1.1

#### **B.2.1.4.2 Methods Used to Generate Bathymetric Grids**

see section B.2.1.1

#### **B.2.1.4.3 Methods Used to Derive Final Depths**

<i>Methods Used</i>	Surface Computation Algorithms
<i>Description</i>	Rainier uses the CARIS CUBE BASE surface algorithms for the generation of all surfaces generated for final submission. The exact behavior of CUBE is determined by the values set in the CUBE parameters file, a xml file which can be selected by the user in the CARIS Tools --> Options --> Environment tab. The Hydrographic

Surveys Division (HSD) has created and provided a customized CUBE parameters file (CubeParams\_NOAA.xml) with new CUBE parameters that are required for each grid resolution. During the creation of CUBE surfaces, the user is given the option to select parameter configurations based upon surface resolution which have been tuned to optimize the performance of the CUBE algorithm. The advanced options configuration is manipulated based on the grid resolution of the CUBE surface being generated.

## **B.2.2 Imagery**

### **B.2.2.1 Side Scan Sonar**

Side scan sonar imagery was not processed.

### **B.2.2.2 Phase Measuring Bathymetric Sonar**

Phase measuring bathymetric sonar imagery was not processed.

### **B.2.2.3 Specific Data Processing Methods**

#### **B.2.2.3.1 Methods Used to Maintain Data Integrity**

Although Rainier currently has no side scan sonar systems in her inventory, the Reson 7125 systems aboard 2801, 2802, 2803 and 2804 acquire angle-independent pseudo SSS imagery. This SSS imagery is primarily used during processing of the multibeam sounding data to aid in determining whether anomalous soundings are true features or noise. It generally does not have sufficient resolution for small object detection, but the shape of objects and their strength of return can greatly increase the confidence in processing results.

#### **B.2.2.3.2 Methods Used to Achieve Object Detection and Accuracy Requirements**

n/a

#### **B.2.2.3.3 Methods Used to Verify Swath Coverage**

n/a

#### **B.2.2.3.4 Criteria Used for Contact Selection**

n/a

### **B.2.2.3.5 Compression Methods Used for Reviewing Imagery**

No compression methods were used for reviewing imagery.

## **B.2.3 Sound Speed**

### **B.2.3.1 Sound Speed Profiles**

Downloading and processing of sound speed data is performed using Velocipy, a part of the HSTP supplied Pydro program suite. Raw SV files are retained and archived for later submission to NGDC. Processed SVP files are archived and submitted to the hydrographic branch as part of the sheet submission package.

For Seacats:

- After a cast, the SBE Seacat is connected to the download computer with a serial cable.
- After starting Velocipy, “File/ Download from SBE” is selected from the dropdown menu. A window showing available casts is then displayed with checkboxes to select cast(s) for download.
- After download the user is then required to enter cast metadata. Empty slots for Project, Survey, NOAA Unit, Instrument, Username, Process Date, Draft, and Latitude and Longitude are given. While Velocipy still asks for metadata, this step can be skipped since the data isn't written to the output files.
- After entering metadata, the sound velocity graph is viewable by clicking on the SV tab in the Metadata window. The user can change the sound speed/depth units (X and Y buttons), zoom in (Magnifier tool), and take a look/edit cast points (+ button). Additional tabs display the Temperature and Table view.
- Casts are exported into CARIS SVP format files by selecting File/Export Selected Profiles. A File Export Settings window will pop up, allowing the user to point to the Caris/ SVP folder and if necessary append the current cast. After clicking OK, the Log Window should read ‘exported sound speed profile successfully’.
- To prepare for the next cast, SEACAT PreCast Setup is selected to clear all memory and initialize the profiler for the next cast.

For MVP:

- For the MVP, casts are typically processed as a group at the end of the day or survey watch.
- After starting Velocipy, “File/ Load Profiles” is selected from the dropdown menu. Navigate to the s12 file produced by the MVP and select file/s to process.
- After the files load, the user is then required to enter cast metadata. Empty slots for Project, Survey, NOAA Unit, Instrument, Username, Process Date, and Draft are given. Unlike the SBE Seacat, Latitude and Longitude are already populated.
- After entering metadata, the sound velocity graph is viewable by clicking on the SV tab in the Metadata window. The user can change the sound speed/depth units (X and Y buttons), zoom in (Magnifier tool), and take a look/edit cast points (+ button). Additional tabs display the Temperature, Salinity and Table view.
- Casts are exported into CARIS SVP format files by selecting “File/Export Selected Profiles”. A File Export Settings window will pop up, allowing the user to point to the Caris/ SVP folder and if necessary

append the current cast. After clicking OK, the Log Window should read ‘exported sound speed profile successfully’.

### B.2.3.1.1 Specific Data Processing Methods

#### B.2.3.1.1.1 Caris SVP File Concatenation Methods

CARIS SVP files are concatenated as follows:

PROJECT	LOCATION	CONCATENATION METHOD
S-M921-FARA-14	Offshore Washington and Oregon	Sheet
OPR-P136-RA-14	North Coast of Kodiak Island, Alaska	Sheet & Launches-Ship
OPR-P377-RA-14	South Alaska Peninsula, Alaska	Launches-Ship
OPR-N305-RA-14	Strait of Juan De Fuca, Washington	Launches-Ship

*Figure 33: CARIS SVP file concatenation method*

### B.2.3.2 Surface Sound Speed

Although no formal post-processing of surface sound speed is required, plotting changes of surface sound speed over an area surveyed can be useful as a troubleshooting tool. To that end ENS Damian Manda, formerly of the *Rainier* created a python script (`extractsv.py`). This tool takes single or multiple HSX files and allows the surface sound speed to be plotted over time as a launch collects data. The output is a geotiff file that may then be overlaid with survey data or charts using another program.

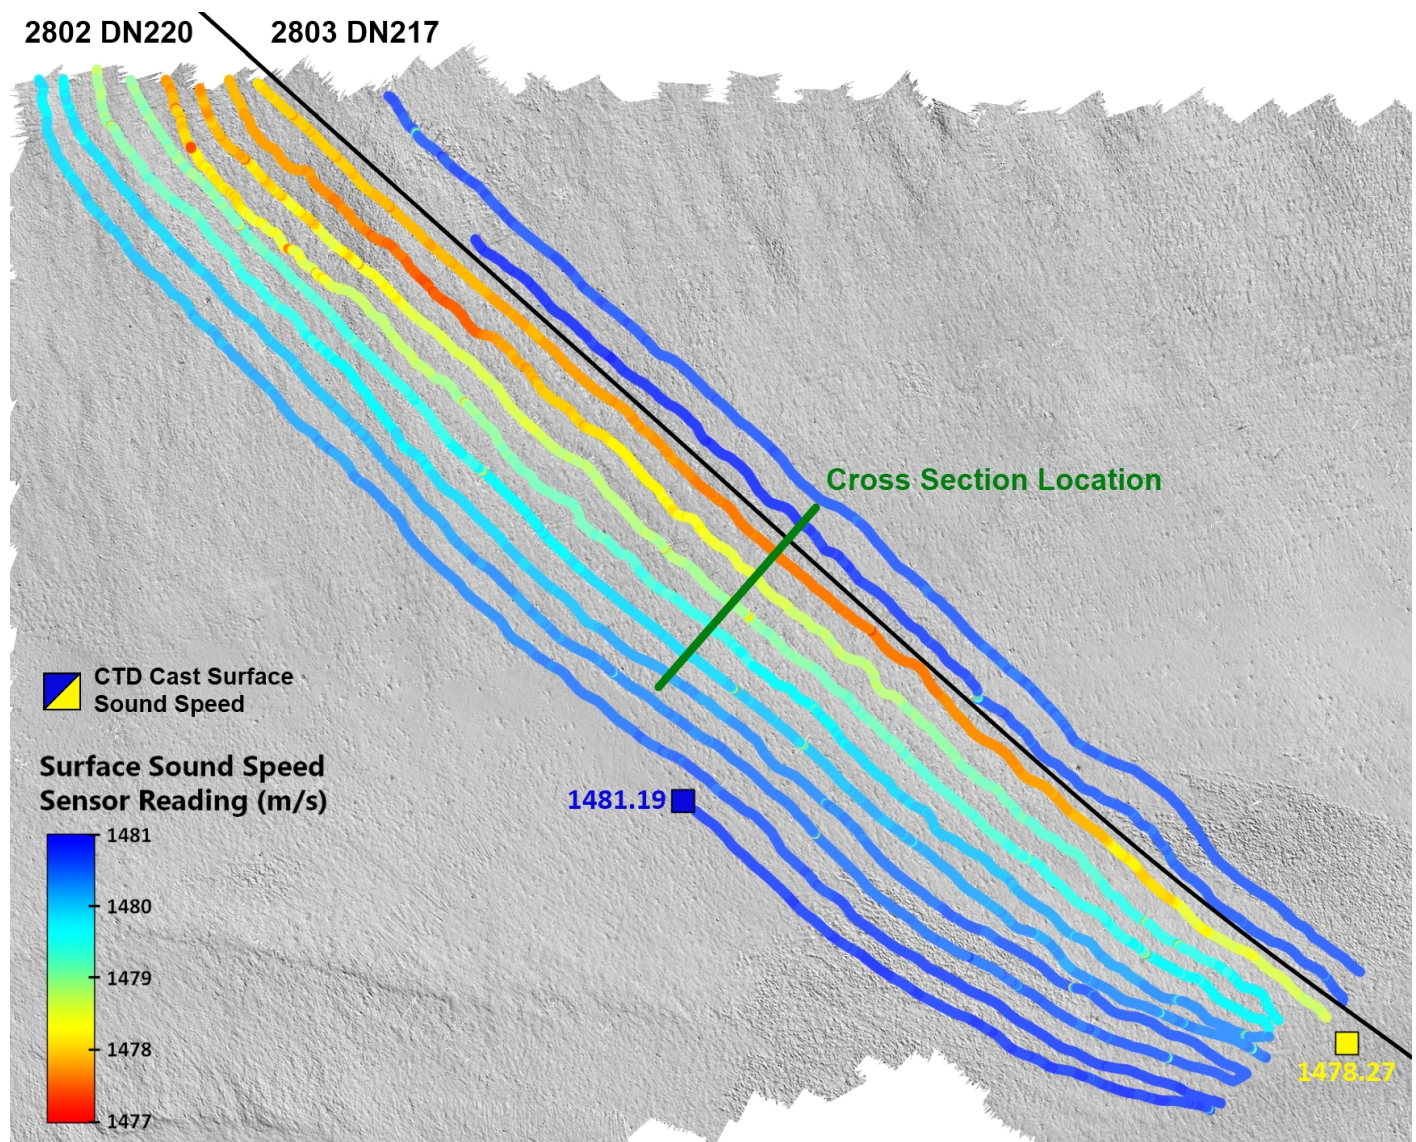


Figure 34: An example of a surface sound speed geotiff overlaid on a DTM.

## B.2.4 Horizontal and Vertical Control

### B.2.4.1 Horizontal Control

POSPac 000 and base station data processing conforms to the Ellipsoidally Referenced Surveys Standard Operating Procedure document in the Appendix IV of the FPM . By post processing the POSPac 000, GNSS and base station data, POSPac creates SBET (smoothed best estimate trajectory) files which are used by CARIS along with the corresponding POSPac 000 file to improve the data collected. Applying SBETs in CARIS HIPS increase the accuracies of attitude and navigation related data. Currently it is the responsibility of the HorCon project manager and the sheet manager to work together applying SBETs to the survey after post acquisition tasks are complete.



Processing raw .000 POSMV data from launches require input from nearby semi-permanent shore stations. POSPac has two options for handling shore stations, Single Baseline and SmartBase processing. SmartBase processing is the preferred method but Rainier must often install their own base station and use the single base station method due to the dearth of CORS stations in Alaska.

For the single base station method, the primary-reference baseline separation must be less than 20 km at the start and end of the mission and can occasionally grow to 100 km during the mission. For the SmartBase method, an optimal network consists of six to eight reference stations evenly distributed around the surveyed area and separated by 50 to 70 km. A minimum of four stations are required for Applanix SmartBase processing.

Initial base station processing requires:

- Processing RAW GPS base station data – When geographically possible, raw GPS data is downloaded daily from shore stations as (.T01/.T02) files. These files are converted into RINEX format using Trimble utility program “Convert to RINEX – TBC utility” v2.1.1.0. Three files are produced, files .YYg, .YYn, and .YYo.
- Obtaining Base Station OPUS Solution -- After creating RINEX files from the base station receiver raw file, the .YYo file is then submitted to OPUS in order to get a precise position solution. If bandwidth is an issue, as it usually is aboard the ship, the RINEX file may need to be decimated and zipped to get the file size smaller and achieve a reasonable upload time. A 3mb file usually takes about 3-5 minutes to upload on the ship’s Vsat.
- OPUS reference frame and format -- Once the RINEX file size is reasonable (under 7mb), go to the OPUS website at: <http://www.ngs.noaa.gov/OPUS>. At the OPUS site the user is given the option to choose the new IGS08 reference frame or the old ITRF00 reference frame. Until further testing and verification is done, Rainier continues to use the old ITRF00 reference frame. For Solution Formats, the extended solution + XML (DRAFT) is selected. Once processed, a NGS OPUS solution report is produced in .txt format. It is in this report that the NAD83 coordinates of the base station which are later entered into POSPac are found.
- Single Base Station Processing
  - 1) Open Applanix POSPac™ Mobile Mapping Suite and set up the project
  - 2) Load the Applanix 000 file (recorded on the launch)
  - 3) Load the satellite data logged by the base station (the .YYo file that corresponds to the day number being processed).
  - 4) Once the coordinate manager window opens, the true ITRF coordinates from the OPUS report is input. The same ITRF coordinates are used throughout the project and are checked against "new" OPUS solutions to maintain consistency.

- 5) Both the SBET (in ITRF format) and smrmsg error data files are created.
- Smart Base Processing
    - 1) Open Applanix POSPac™ Mobile Mapping Suite and set up the project
    - 2) Load the Applanix 000 file (recorded on the launch)
    - 3) Select the "Find Base Stations" option which will generate a list of nearby CORS stations and then click on the "Smart Select" button.
    - 4) POSPac will need the Internet to access and download the base station data it finds as the best option to import. It will need a minimum of 4 stations as well as adequate ephemeris data to continue. This process is done automatically.
    - 5) Once the base stations and ephemeris data have been downloaded, the Raw Data Check-In window will appear automatically, click OK. Once you click OK, POSPac will create a triangulated network of all the base stations it has chosen for processing.
    - 6) Next run the SmartBase Quality Check. POSPac will run the quality check to see if the data downloaded is good enough for processing and generate a Results Summary. If the data is inferior, it will recommend to Re-run the SmartBase Quality Check processor or that there is not enough adequate data to continue.
    - 7) Due to the remote locations Rainier surveys, sometimes there is not an optimal amount of data available. Occasionally you have to override the system and see if the SBET generated is up to spec. This is done by running the Applanix SmartBase processor.
    - 8) Once the Applanix SmartBase processor has finished, the outline of the triangulated network will be highlighted in yellow. This means that you are ready for processing and that the appropriate base stations have been designated and set.
  - Batch Processing -- Batch processing allows processing of multiple POS/MV .000 files from multiple vessels on a once per day per survey sheet basis.
  - PosPac SBET Quality Control -- Once the POSPac project has completed processing successfully, quality control of the SBETs (Smoothed Best Estimated Trajectories) is performed.
  - Exporting Custom SBET -- Once the QC is complete and the processing log updated, the next step is to export a custom SBET in NAD83. A custom SBET in NAD 83 is created since the DGPS beacons broadcast in NAD83 and the default SBET created by POSPac is in ITRF.

For both a Single Base or Smart Base solution, SBETs are applied in CARIS by loading both the SBET files and error data files in smrmsg format. For every SBET file generated during single base station processing there is an associated smrmsg file.

- 1) Process --> Load Attitude/Navigation data... Load the custom SBET files (NAD83). Import data for Navigation, Gyro, Pitch, Roll, and GPS Height are all selected for survey launches. Only Navigation and GPS Height are selected for the ship.
- 2) Process --> Load Error data... Load the smormsg error data file. Import data for Position RMS, Roll RMS, Pitch RMS, and Gyro RMS are selected for survey launches. Vertical RMS is not selected since HIPS will default to using the trueheave RMS values. Only Position RMS is selected for the ship.

In the event that no base station falls within the 20km limit as is often the case with offshore sheets, and a Precise Point Positioning (PPP) solution utilizing precise ephemeris data is used, SBET and RMS are loaded as follows.

- 1) Process --> Load Attitude/Navigation data... Load the custom SBET files (NAD83). Import data for Navigation and GPS Height are selected for survey launches and the ship.
- 2) Process --> Load Error data... Load the smormsg error data file. Import data for just the Position RMS, is selected for survey launches and the ship. Vertical RMS is not selected since HIPS will default to using the trueheave RMS values for the launches.

PROJECT	LOCATION	Ship Installed BASE Station
S-M921-FARA-14	Offshore Washington and Oregon	none
OPR-P136-RA-14	North Coast of Kodiak Island, Alaska	Whale Pass
OPR-P377-RA-14	South Alaska Peninsula, Alaska	none
OPR-N305-RA-14	Strait of Juan De Fuca, Washington	none

*Figure 35: 2014 Project base stations installed*

#### **B.2.4.2 Vertical Control**

All tide data is processed off of the ship by the Center for Operational Oceanographic Products and Services (CO-OPS). Although Rainier does not process any of the tidal water level data that she collects, preliminary and final data packages are submitted to CO-OPS. All Tide & Water Level Data Packages submitted conform to the requirements of section 5.2.2.4 of the FPM and section 4 of the HSSD.

To receive final water level correctors to apply to an individual hydrographic sheet, a Request for Approved Tides/Water Levels must be submitted to the Chief of Products and Services Branch, N/OPS3. This package includes an Abstract of Times of Hydrography and digital MID MIF files of the track lines from Pydro. Once this request has been received, CO-OPS has agreed to provide final water level correctors relative to the appropriate chart datum and final tidal zoning, as soon as possible. Final approved water levels are

applied to applicable data of all hydrographic surveys before data submission to PHB.

For the 2014 field season all surveys had their elevations referenced to the MLLW

PROJECT	LOCATION	REFERENCE FRAME
S-M921-FARA-14	Offshore Washington and Oregon	MLLW
OPR-P136-RA-14	North Coast of Kodiak Island, Alaska	MLLW
OPR-P377-RA-14	South Alaska Peninsula, Alaska	MLLW
OPR-N305-RA-14	Strait of Juan De Fuca, Washington	MLLW

*Figure 36: 2014 Project water level reference frames*

## B.2.5 Feature Verification

The composite source shoreline feature file created at HSD and delivered with the Project Instructions is to be used as the only shoreline data for use in the field. The composite source file is compiled from all available source shoreline files (i.e. ENC, Geographic Cells, lidar, RNC, and Prior Surveys) into a single file in an S-57 .000 format.

In preparation for shoreline verification, the Survey Manager copied the project wide composite source file and cropped it to include only items contained on their assigned sheet. This cropped file is then saved as a HOB file named HXXXXX\_Composite\_Source.hob. At this point, no further edits are ever made to this HOB file and it is retained as the “starting point” to any subsequent changes discovered during shoreline verification. A copy of the original source HOB file is created and called HXXXXX\_Final\_Features\_File.hob. It is to this final features HOB file that any edits are performed.

The Survey Manager creates a composite shoreline reference document, the paper representation of the shoreline that will be used to write observations in the field. The HXXXXX\_Composite\_Source.hob file may be color coded to highlight any assigned features by using the asgnmt=Assigned field. The resultant color coded shoreline is then sent directly to the plotter from Notebook. The HXXXXX\_Composite\_Source.hob is also saved in an S-57 .000 format which can be directly opened in Hypack for field reference and verification where necessary.

In the field, CARIS Notebook was used to acquire DPs and/or modify S-57 attribution of existing features. Edits and DPs were collected on the most current version of the HXXXXX\_Final\_Features\_File.hob file. An archival copy of the final features file is saved for each day of feature verification. Daily copies are produced in order to aid feature tracking and the eventual compilation of all features in the submission HXXXXX\_Final\_Features\_File.hob.

De-confliction of the composite source shoreline was conducted only on items specifically addressed in the field while conducting shoreline verification. As a general rule, nearly all features inshore of the NALL line are not investigated. All conflicting composite source features that are not addressed in the field were left unedited in the final features file HOB.

Composite source features offshore of the NALL which were DPed for height were also de-conflicted if multiple shoreline features were present representing the same item. The source item most closely representing the actual feature was flagged “Primary” and “retain” or “update” if edited for height while the other extraneous features were flagged “Secondary” and “delete” with a comment “removed due to deconfliction”. In the event that a DP was taken to reposition an incorrectly charted feature, all of the composite source features in the wrong position were “Secondary” and “delete”.

Primary and secondary flagged features are correlated using the NOAA custom attributes prkyid (Primary Key ID) and dbkyid (Database Key ID). The primary feature has its dbkyid populated with a unique number and any secondary features selected to be linked has its prkyid updated with the same number. The unique number assigned is typically the CARIS Feature Object ID (FOID).

For surveys where limited shoreline verification was performed, DPs and/or CARIS VBES/SWMB CUBE surfaces were used to help define kelp and foul areas. Any new line features were digitized in the HXXXXX\_Final\_Features\_File.hob file. If an area feature required modification, a copy of the feature was edited to reflect the current survey and characterized as "new" while the original feature was flagged as "delete". When objects were added or modified as “new”, the SORDAT and SORIND fields were updated. All features flagged as "delete" always maintain their original SORDAT and SORIND.

Investigation methods and results are described in CARIS Notebook under the S-57 attributes acronym “remrks”. In the event that charting confusion could result from just the “remrks” field, specific recommendations are described under the S-57 attributes acronym “recomd”. Any composite source features or shoreline not addressed during shoreline verification are left untouched.

All shoreline data is submitted as the edited final features file (HXXXXX\_Final\_Features\_File) in S-57 format (.000). The SORDAT and SORIND fields are filled in for any objects added to or modified in the final features file.

## Placeholder

*Figure 37: This figure can not be deleted*

### **B.2.6 Backscatter**

Although no formal processing of backscatter data were performed, backscatter data were periodically converted solely to spot check and ensure that it was being properly logged. No processed backscatter data is included with the data submission but all raw backscatter data are submitted directly to NGDC for

archival purposes.

## Placeholder

*Figure 38: This figure can not be deleted*

### **B.2.7 Other**

Initial data processing at the end of each survey day is the responsibility of the Night Processing Team, or Launch Crew if no Night Processing Team is assigned. The Night Processing Team is typically composed of two crewmembers, one with at least a year's experience, and one junior member in training. Daily processing produces a preliminary product in which all gross data problems have been identified and/or removed, and thus can be used by the Survey Team to plan the next day's operations. The Night Processors complete a data pass down log to inform the Survey Manager and FOO of any notable features or systematic problems in the day's data.

In addition, the Night Processing Team may be assigned to processing and QC checks of POSPac data. Final application of the POSPac data is the responsibility of the HorCon project manager and/or assistants. The HorCon Project Manager and the Sheet Manager work together to ensure SBETs were properly applying to the survey after post acquisition tasks are complete.

Final data processing and analysis is the responsibility of the Survey Team. While "ping-by-ping" data editing is not required, the Team will review the survey in its entirety to ensure that the final products reflect observed conditions to the standards set by the relevant OCS guidance. Bathymetric surfaces are reviewed with the best available correctors applied to ensure that all data quality problems are identified and resolved if possible, and all submerged features are accurately represented. Shoreline verification (if applicable) and feature data are reviewed in the context of this bathymetry. Survey documentation (including the Descriptive Report) is generated in conjunction with this review process.

## Placeholder

*Figure 39: This figure can not be deleted*

### **B.3 Quality Management**

Final review of the "QC" field sheet CUBE Surface is left to the Mentor or experienced Survey Manager

who inspects areas with questionable shaded depth models and/or high standard deviation to ensure that no actual features were cleaned out. The use of large subset tiles is encouraged to track coverage of problems areas.

On occasion, the resolution of the CUBE surface may not be sufficient to capture the high point of a feature. In less than 20m of water, any feature where the most probable accurate sounding was shoaler than the CUBE surface by greater than one half the allowable error under IHO S-44 Order 1 was considered inadequately captured by the CUBE surface. In greater than 20m of water, this allowable error was expanded to the full Order 1 error allowance at that depth. Although this may occur on irregular shoals or rock pinnacles, man-made features such as piles and wrecks are of particular concern. These features have very slender high points that extend far above the surrounding seafloor as well as the CUBE surface. To ensure that these features are properly represented, the shoalest point is flagged “designated” in CARIS.

During the “finalization” process, the CUBE surface is forced to honor all soundings which have been flagged “designated”. In the case of a survey where the high points of many features are not being captured by the CUBE surface, (i.e. a boulder field), the hydrographer may decide to produce higher resolution CUBE surfaces to ensure that these features are being honored. Any such deviations from standard procedures will be noted in that survey’s Descriptive Report.

At the time of this report, Coast Survey has not approved multiple resolution BASE surfaces as a final deliverable. Although these surfaces are acceptable for field use, the algorithm produces artifacts at the resolution steps that are unsuitable for a final product. To circumvent this problem, single resolution CUBE surfaces were generated to be “cookie cut” and then reassembled to create the final CUBE surface from which depths are derived. Multiple CUBE surfaces are gridded using different resolutions for different depth ranges as defined in section 5.2.2.2 of the HSSD.

Under ideal circumstances, gridding should be done at the finest resolution that the data density will support. This theoretical maximum resolution was historically defined as three times the beam footprint size for a particular echosounder and depth combination. Current guidance (HSSD 5.2.2.2) states that 95% of the nodes in a cube surface shall contain at least 5 soundings per node. This minimum density of 5 soundings per node has experimentally been shown to be adequate to represent the depth of the seafloor while not being strongly influenced by a single erroneous sounding.

In order to extract data density statistics from a given sheet, the function “Compute Statistics...” was selected for each finalized surface. Statistics were calculated on the Density attribute layer with a bin size of 0.05 selected. The resulting graph and text file provide the total count of nodes and count of nodes within each bin. From these values, it is elementary to compute the percent of nodes having greater than five soundings and ensuring that the 95% benchmark was met. If this benchmark was met, a simple statement to that effect was added to the DR. In the event of a deficiency, these results were documented within the DR for each individual survey.

To meet the required sounding density, Rainier adheres to the table of resolutions and depth ranges as defined in HSSD which are based on practical experience in “typical” survey areas, and a working knowledge of bottom coverage capabilities of each echo sounding system currently in use throughout the fleet. These resolutions are also based on assumed sonar system selections for each depth regime and practical data processing limitations. Deeper areas are gridded at a coarser resolution than shoaler areas

where the data density is greater.

With the advent of the CARIS CSAR framework and multi-threaded CUBE processing implemented in CARIS HIPS and SIPS, it is now practical to create a single field sheet that covers an entire survey. All resolution-specific CUBE surfaces are now created in a single sheet wide field sheet. The field sheet layout and CUBE surface resolutions are described for each survey in the Descriptive Report.

Each resolution-specific CUBE surface is named according to the following convention:

<Survey registry number>\_<Sounding Type>\_<units of resolution>\_Vertical Datum>

(EX: “H12345\_2m\_MLLW” is the two-meter resolution surface of survey H12345 referenced to MLLW )

Once the collection of CUBE surfaces accurately represent the surveyed bottom and it is certain that no further edits will be made, each CUBE surface is finalized using the resolution as defined in section 5.2.2.2 of the HSSD. All finalized CUBE surfaces are then combined at the coarsest resolution created for the data set to produce the final combined CUBE surface. The final combined CUBE surface is named by the following convention; Hxxxxx\_Final\_Combined.

The final CUBE surfaces are sun-illuminated from different angles and examined for coverage and as a final check for systematic errors such as tide, sound velocity, or attitude and/or timing errors. The final CUBE surface submitted in the field sheet serves to demonstrate that both SWMB coverage requirements are met and that systematic errors have been examined for quality-assurance purposes.

As a quality control (QC) measure, cross-lines with a linear nautical total of at least 4% of mainscheme multibeam lines were run on each survey. Then a CUBE surface was created using strictly the main scheme lines, while a second surface was created using only the crosslines. From these two surfaces, a surface difference was generated (at a 1 meter resolution). Statistics were then derived from the difference surface and documented within the Descriptive Report for each survey.

## **B.4 Uncertainty and Error Management**

Rainier’s primary bathymetric data review and quality control tool is the CARIS CUBE (Combined Uncertainty and Bathymetry Estimator) surface as implemented in CARIS HIPS. The CUBE algorithm generates a surface consisting of multiple hypotheses that represent the possible depths at any given position. The CUBE surface is a grid of estimation nodes where depth values are computed based on the horizontal and vertical uncertainty of each contributing sounding as follows:

- Soundings with a low vertical uncertainty are given more influence than soundings with high vertical uncertainty
- Soundings with a low horizontal uncertainty are given more influence than soundings with a high horizontal uncertainty.



- Soundings close to the node are given a greater weight than soundings further away from the node.

As soundings are propagated to a node, a hypothesis representing a possible depth value is developed for the node. If a sounding's value is not significantly different from the previous sounding then the same or modified hypothesis is used. If the value does change significantly, a new hypothesis is created. A node can contain more than one hypothesis. As node-to-node hypotheses are combined into multiple surfaces through methodical processing, a final surface that is the best representation of the bathymetry is created.

Any individual sounding's uncertainty, or Total Propagated Uncertainty (TPU), is derived from the assumed uncertainty in the echosounder measurement itself, as well as the contributing correctors from sound speed, water levels, position, and attitude. TPU values for tide and sound velocity must be entered for each vessel during TPU computation.

- Tide values measured uncertainty value error ranges from 0.01m to 0.05 m dependent upon the accuracy of the tide gauges used and the duration of their deployment. Rainier is using a value of 0.0 since the Tide Component Error Estimation section of the Hydrographic Survey Project Instructions now includes the estimated gauge measurement error in addition to the tidal datum computation error and tidal zoning error.

- Tide values zoning is unique for each project area and typically provided in Appendix II of the Hydrographic Survey Project Instructions, Water Level Instructions. In section 1.3.1.1 of the Water Level Instructions, Tide Component Error Estimation, the tidal error contribution to the total survey error budget is provided at the 95% confidence level, and includes the estimated gauge measurement error, tidal datum computation error, and tidal zoning error. Since this tidal error value is given for two sigma, the value must be divided by 1.96 before it can be entered into CARIS (which expects a one sigma value). If TCARI grids are assigned to the project area, this value is set at 0.0 since TCARI automatically calculates the error associated with water level interpolation and incorporates it into the residual/harmonic solutions.

- Measured sound speed value error ranges from 0.5 to 4 m/s, dependent on temporal/spatial variability. Although the FPM recommends a value of 4 m/s when 1 cast is taken every 4-hours, Rainier experience in the field suggests that a value of 3.0 m/s better models this error.

- Surface sound speed value is dependent on the manufacturer specifications of the unit utilized to measure surface SV values for refraction corrections to flat-faced transducers. The Reson SVP 71 fixed-mount sound velocity probe is affixed to launches 2801 2802, 2803 and 2804 to provide correctors for the flat face Reson 7125. A Reson SVP 70 is mounted on Rainier to provide correctors for the EM710. The Reson SVP 71 velocity probe has a published accuracy of 0.15 m/s while the SVP 70 has a published accuracy of 0.05 m/s.

All other error estimates are read from the Hydrographic Vessel File (HVF) and Device Model file. The HVF contains all offsets and system biases for the survey vessel and its systems, as well as error estimates for latency, sensor offset measurements, attitude and navigation measurements, and draft measurements. In addition, the HVF specifies which type of sonar system the vessel is using, referencing the appropriate entry from the Device Model file.

In addition to the usual a priori estimates of uncertainty, some real-time and post-processed uncertainty sources were also incorporated into the depth estimates of Rainier surveys. Real-time uncertainties from the Reson 7125 were recorded and applied in post-processing. Applanix TrueHeave files are recorded on all survey vessels, which include an estimate of the heave uncertainty, and are applied during post-processing. Finally, the post-processed uncertainties associated with vessel roll, pitch, gyro and navigation are applied in CARIS HIPS via an SBET RMS file generated in POSPac.

## **B.4.1 Total Propagated Uncertainty (TPU)**

### **B.4.1.1 TPU Calculation Methods**

There are two places in CARIS where the user directly defines uncertainty values for use in CARIS to calculate TPU values, in the HVF and the direct input of SV and tide values during the TPU computation.

### **B.4.1.2 Source of TPU Values**

TPU values for all motion, navigation position and timing values are taken directly from Appendix IV (Uncertainty values for use in CARIS with vessels equipped WITH an attitude sensor) of the Field Procedures Manual. All timing values were set to 0.005 seconds as outlined for setups with Ethernet connections and precise timing.

All offset values were chosen to be 0.010 meters based on the accuracy provided by professional surveys.

All MRU alignment values are derived from the patch test. The gyro value is taken directly from the standard deviation of the yaw values. The pitch/roll value is combined as one in the HVF and is computed as the square root of pitch standard deviation squared plus roll standard deviation squared.

The vessel speed uncertainty is defined as 0.03 m/s plus an average value (assumed to be 0.05 m/s) for currents for a total of 0.08 m/s . Vessel loading was determined by measuring the waterline of a single launch under a variety of fuel loading conditions (full, empty, and somewhere in between) and the standard deviation calculated. Vessel draft was determined by measuring the waterline 3 times from both the starboard and port side of each launch. The standard deviation was calculated individually for each side and the larger of these two values was selected for the HVF. Vessel delta draft was determined by measuring the standard deviation of the depth for each speed (RPM) in the dynamic draft determination. The largest of these values was selected for the HVF.

### **B.4.1.3 TPU Values**

<i>Vessel</i>	2801_Reson7125_HF_512
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz

<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
	<i>Navigation Position</i>	1.000 meters	
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
		<i>Pitch</i>	0.005 seconds
		<i>Roll</i>	0.005 seconds
	<i>Offsets</i>	<i>x</i>	0.010 meters
		<i>y</i>	0.010 meters
		<i>z</i>	0.010 meters
	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees
		<i>Pitch</i>	0.100 degrees
		<i>Roll</i>	0.100 degrees
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second
		<i>Loading</i>	0.025 meters
<i>Draft</i>		0.020 meters	
<i>Delta Draft</i>		0.010 meters	
<i>Vessel</i>	2801_Reson7125_LF_256		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz		
<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
<i>Navigation Position</i>	1.000 meters		

	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
		<i>Pitch</i>	0.005 seconds
		<i>Roll</i>	0.005 seconds
	<i>Offsets</i>	<i>x</i>	0.010 meters
		<i>y</i>	0.010 meters
		<i>z</i>	0.010 meters
	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees
		<i>Pitch</i>	0.100 degrees
		<i>Roll</i>	0.100 degrees
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second
		<i>Loading</i>	0.025 meters
		<i>Draft</i>	0.020 meters
		<i>Delta Draft</i>	0.010 meters
<i>Vessel</i>	2802_Reson7125_HF_512		
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz		
<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
	<i>Navigation Position</i>	1.000 meters	
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
<i>Pitch</i>		0.005 seconds	
<i>Roll</i>		0.005 seconds	
<i>Offsets</i>	<i>x</i>	0.010 meters	
	<i>y</i>	0.010 meters	
	<i>z</i>	0.010 meters	

	<table border="1"> <tbody> <tr> <td rowspan="3"><i>MRU Alignment</i></td> <td><i>Gyro</i></td> <td>0.200 degrees</td> </tr> <tr> <td><i>Pitch</i></td> <td>0.100 degrees</td> </tr> <tr> <td><i>Roll</i></td> <td>0.100 degrees</td> </tr> <tr> <td rowspan="4"><i>Vessel</i></td> <td><i>Speed</i></td> <td>0.080 meters/second</td> </tr> <tr> <td><i>Loading</i></td> <td>0.025 meters</td> </tr> <tr> <td><i>Draft</i></td> <td>0.020 meters</td> </tr> <tr> <td><i>Delta Draft</i></td> <td>0.010 meters</td> </tr> </tbody> </table>	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees	<i>Pitch</i>	0.100 degrees	<i>Roll</i>	0.100 degrees	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second	<i>Loading</i>	0.025 meters	<i>Draft</i>	0.020 meters	<i>Delta Draft</i>	0.010 meters																																
<i>MRU Alignment</i>	<i>Gyro</i>		0.200 degrees																																														
	<i>Pitch</i>		0.100 degrees																																														
	<i>Roll</i>	0.100 degrees																																															
<i>Vessel</i>	<i>Speed</i>	0.080 meters/second																																															
	<i>Loading</i>	0.025 meters																																															
	<i>Draft</i>	0.020 meters																																															
	<i>Delta Draft</i>	0.010 meters																																															
<i>Vessel</i>	2802_Reson7125_LF_256																																																
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz																																																
<i>TPU Standard Deviation Values</i>	<table border="1"> <tbody> <tr> <td rowspan="4"><i>Motion</i></td> <td><i>Gyro</i></td> <td>0.200 degrees</td> </tr> <tr> <td rowspan="2"><i>Heave</i></td> <td>5.000 % Amplitude</td> </tr> <tr> <td>0.050 meters</td> </tr> <tr> <td><i>Pitch</i></td> <td>0.020 degrees</td> </tr> <tr> <td><i>Roll</i></td> <td>0.020 degrees</td> </tr> <tr> <td><i>Navigation Position</i></td> <td>1.000 meters</td> </tr> <tr> <td rowspan="6"><i>Timing</i></td> <td><i>Transducer</i></td> <td>0.005 seconds</td> </tr> <tr> <td><i>Navigation</i></td> <td>0.005 seconds</td> </tr> <tr> <td><i>Gyro</i></td> <td>0.005 seconds</td> </tr> <tr> <td><i>Heave</i></td> <td>0.005 seconds</td> </tr> <tr> <td><i>Pitch</i></td> <td>0.005 seconds</td> </tr> <tr> <td><i>Roll</i></td> <td>0.005 seconds</td> </tr> <tr> <td rowspan="3"><i>Offsets</i></td> <td><i>x</i></td> <td>0.010 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.010 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.010 meters</td> </tr> <tr> <td rowspan="3"><i>MRU Alignment</i></td> <td><i>Gyro</i></td> <td>0.200 degrees</td> </tr> <tr> <td><i>Pitch</i></td> <td>0.100 degrees</td> </tr> <tr> <td><i>Roll</i></td> <td>0.100 degrees</td> </tr> <tr> <td rowspan="4"><i>Vessel</i></td> <td><i>Speed</i></td> <td>0.080 meters/second</td> </tr> <tr> <td><i>Loading</i></td> <td>0.025 meters</td> </tr> <tr> <td><i>Draft</i></td> <td>0.020 meters</td> </tr> <tr> <td><i>Delta Draft</i></td> <td>0.010 meters</td> </tr> </tbody> </table>	<i>Motion</i>	<i>Gyro</i>	0.200 degrees	<i>Heave</i>	5.000 % Amplitude	0.050 meters	<i>Pitch</i>	0.020 degrees	<i>Roll</i>	0.020 degrees	<i>Navigation Position</i>	1.000 meters	<i>Timing</i>	<i>Transducer</i>	0.005 seconds	<i>Navigation</i>	0.005 seconds	<i>Gyro</i>	0.005 seconds	<i>Heave</i>	0.005 seconds	<i>Pitch</i>	0.005 seconds	<i>Roll</i>	0.005 seconds	<i>Offsets</i>	<i>x</i>	0.010 meters	<i>y</i>	0.010 meters	<i>z</i>	0.010 meters	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees	<i>Pitch</i>	0.100 degrees	<i>Roll</i>	0.100 degrees	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second	<i>Loading</i>	0.025 meters	<i>Draft</i>	0.020 meters	<i>Delta Draft</i>	0.010 meters
	<i>Motion</i>		<i>Gyro</i>	0.200 degrees																																													
			<i>Heave</i>	5.000 % Amplitude																																													
				0.050 meters																																													
		<i>Pitch</i>	0.020 degrees																																														
	<i>Roll</i>	0.020 degrees																																															
	<i>Navigation Position</i>	1.000 meters																																															
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds																																														
		<i>Navigation</i>	0.005 seconds																																														
		<i>Gyro</i>	0.005 seconds																																														
<i>Heave</i>		0.005 seconds																																															
<i>Pitch</i>		0.005 seconds																																															
<i>Roll</i>		0.005 seconds																																															
<i>Offsets</i>	<i>x</i>	0.010 meters																																															
	<i>y</i>	0.010 meters																																															
	<i>z</i>	0.010 meters																																															
<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees																																															
	<i>Pitch</i>	0.100 degrees																																															
	<i>Roll</i>	0.100 degrees																																															
<i>Vessel</i>	<i>Speed</i>	0.080 meters/second																																															
	<i>Loading</i>	0.025 meters																																															
	<i>Draft</i>	0.020 meters																																															
	<i>Delta Draft</i>	0.010 meters																																															
<i>Vessel</i>	2803_Reson7125_HF_512																																																
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz																																																

<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
	<i>Navigation Position</i>	1.000 meters	
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
		<i>Pitch</i>	0.005 seconds
		<i>Roll</i>	0.005 seconds
	<i>Offsets</i>	<i>x</i>	0.010 meters
		<i>y</i>	0.010 meters
		<i>z</i>	0.010 meters
	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees
		<i>Pitch</i>	0.100 degrees
		<i>Roll</i>	0.100 degrees
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second
<i>Loading</i>		0.025 meters	
<i>Draft</i>		0.020 meters	
<i>Delta Draft</i>		0.010 meters	
<i>Vessel</i>	2803_Reson7125_LF_256		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz		
<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
<i>Navigation Position</i>	1.000 meters		

	<i>Timing</i>	<i>Transducer</i>	0.005 seconds	
		<i>Navigation</i>	0.005 seconds	
		<i>Gyro</i>	0.005 seconds	
		<i>Heave</i>	0.005 seconds	
		<i>Pitch</i>	0.005 seconds	
		<i>Roll</i>	0.005 seconds	
	<i>Offsets</i>	<i>x</i>	0.010 meters	
		<i>y</i>	0.010 meters	
		<i>z</i>	0.010 meters	
	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees	
		<i>Pitch</i>	0.100 degrees	
		<i>Roll</i>	0.100 degrees	
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second	
		<i>Loading</i>	0.025 meters	
		<i>Draft</i>	0.020 meters	
		<i>Delta Draft</i>	0.010 meters	
	<i>Vessel</i>	2804_Reson7125_HF_512		
	<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz		
	<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
			<i>Heave</i>	5.000 % Amplitude
0.050 meters				
<i>Pitch</i>			0.020 degrees	
<i>Roll</i>		0.020 degrees		
<i>Navigation Position</i>		1.000 meters		
<i>Timing</i>		<i>Transducer</i>	0.005 seconds	
		<i>Navigation</i>	0.005 seconds	
		<i>Gyro</i>	0.005 seconds	
		<i>Heave</i>	0.005 seconds	
		<i>Pitch</i>	0.005 seconds	
		<i>Roll</i>	0.005 seconds	
<i>Offsets</i>		<i>x</i>	0.010 meters	
	<i>y</i>	0.010 meters		
	<i>z</i>	0.010 meters		

	<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees
		<i>Pitch</i>	0.100 degrees
		<i>Roll</i>	0.100 degrees
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second
		<i>Loading</i>	0.025 meters
		<i>Draft</i>	0.020 meters
		<i>Delta Draft</i>	0.010 meters
<i>Vessel</i>	2804_Reson7125_LF_256		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz		
<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
	<i>Navigation Position</i>	1.000 meters	
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
		<i>Pitch</i>	0.005 seconds
		<i>Roll</i>	0.005 seconds
	<i>Offsets</i>	<i>x</i>	0.010 meters
		<i>y</i>	0.010 meters
		<i>z</i>	0.010 meters
<i>MRU Alignment</i>	<i>Gyro</i>	0.200 degrees	
	<i>Pitch</i>	0.100 degrees	
	<i>Roll</i>	0.100 degrees	
<i>Vessel</i>	<i>Speed</i>	0.080 meters/second	
	<i>Loading</i>	0.025 meters	
	<i>Draft</i>	0.020 meters	
	<i>Delta Draft</i>	0.010 meters	
<i>Vessel</i>	S221_Simrad-EM710_ICE		
<i>Echosounder</i>	Simrad EM710 0.5x1 100 kilohertz		



<i>TPU Standard Deviation Values</i>	<i>Motion</i>	<i>Gyro</i>	0.020 degrees
		<i>Heave</i>	5.000 % Amplitude
			0.050 meters
		<i>Pitch</i>	0.020 degrees
	<i>Roll</i>	0.020 degrees	
	<i>Navigation Position</i>	1.000 meters	
	<i>Timing</i>	<i>Transducer</i>	0.005 seconds
		<i>Navigation</i>	0.005 seconds
		<i>Gyro</i>	0.005 seconds
		<i>Heave</i>	0.005 seconds
		<i>Pitch</i>	0.005 seconds
		<i>Roll</i>	0.005 seconds
	<i>Offsets</i>	<i>x</i>	0.002 meters
		<i>y</i>	0.002 meters
		<i>z</i>	0.002 meters
	<i>MRU Alignment</i>	<i>Gyro</i>	0.047 degrees
		<i>Pitch</i>	0.032 degrees
		<i>Roll</i>	0.032 degrees
	<i>Vessel</i>	<i>Speed</i>	0.080 meters/second
		<i>Loading</i>	0.025 meters
		<i>Draft</i>	0.021 meters
		<i>Delta Draft</i>	0.010 meters

## B.4.2 Deviations

There were no deviations from the requirement to compute total propagated uncertainty.

## C Corrections To Echo Soundings

### C.1 Vessel Offsets and Layback

#### C.1.1 Vessel Offsets

##### C.1.1.1 Description of Correctors

Vessel offset correctors are the values used to describe the location of all hydrographic sensors in relation to a defined reference point. These values are needed to compute sensor lever arms needed to correct for vessel orientation and ultimately produce the final geographic position for every sounding collected.

### C.1.1.2 Methods and Procedures

For Rainier survey launches, all vessel offset values are stored in the CARIS HVF. The POS/MV's IMU is defined as Reference Point (RP). Ideally the RP should be as close as possible to the center of rotation for the vessel as feasible and this fact was taken into account when positioning the IMU. Since the IMU is the source for all launch heave, pitch, roll, gyro, and navigation values, all of these sensors have X-Y-Z values of 0,0,0. Only Transducer 1 and SVP 1, the sonar unit, requires non-zero offset values entered.

For Rainier the situation is much more complicated since problems with heave occur if the RP is defined as the IMU. Due to this the RP was put at EM710 transmit transducer and the offset values spread out between the Kongsberg SIS ship file, the POS/MV, and the CARIS HVF. In SIS the offsets entered account for the offset between the EM710 transmitter and receiver. In the POS/MV the offsets entered account for offsets between the EM710 transmitter to the IMU along with the EM710 transmitter to the port antenna. Offsets in the CARIS HVF also account for the offset between the EM710 transmitter and receiver but is entered only in SVP 2 so that SV files are properly applied.

The CARIS HVF is maintained for Rainier, required for application of SV and dynamic draft correctors. For this HVF, all vessel offset values have been set to 0,0,0 to avoid double-correction. The only exceptions to this are the SVP 2 offset values (and waterline discussed in section C.2.1) that are required for SV application.

All actual offset values were surveyed and verified as described in section A.1 of this report.

### C.1.1.3 Vessel Offset Correctors

<i>Vessel</i>	2801_Reson7125_HF_512		
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz		
<i>Date</i>	2014-02-01		
<i>Offsets</i>	<i>MRU to Transducer</i>	<i>x</i>	-0.004 meters
		<i>y</i>	0.072 meters
		<i>z</i>	0.491 meters
		<i>x2</i>	
		<i>y2</i>	
		<i>z2</i>	

	<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.004 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.072 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.491 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	-0.004 meters	<i>y</i>	0.072 meters	<i>z</i>	0.491 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>														
<i>Nav to Transducer</i>	<i>x</i>		-0.004 meters																													
	<i>y</i>		0.072 meters																													
	<i>z</i>		0.491 meters																													
	<i>x2</i>																															
	<i>y2</i>																															
	<i>z2</i>																															
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees																														
	<i>Roll2</i>																															
<i>Vessel</i>	2801_Reson7125_LF_256																															
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz																															
<i>Date</i>	2014-02-01																															
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>-0.004 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.075 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.491 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.004 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.075 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.491 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	-0.004 meters	<i>y</i>	0.075 meters	<i>z</i>	0.491 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Nav to Transducer</i>	<i>x</i>	-0.004 meters	<i>y</i>	0.075 meters	<i>z</i>	0.491 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>	
	<i>MRU to Transducer</i>		<i>x</i>	-0.004 meters																												
			<i>y</i>	0.075 meters																												
<i>z</i>			0.491 meters																													
<i>x2</i>																																
<i>y2</i>																																
<i>z2</i>																																
<i>Nav to Transducer</i>	<i>x</i>	-0.004 meters																														
	<i>y</i>	0.075 meters																														
	<i>z</i>	0.491 meters																														
	<i>x2</i>																															
	<i>y2</i>																															
	<i>z2</i>																															
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees																														
	<i>Roll2</i>																															
<i>Vessel</i>	2802_Reson7125_HF_512																															
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz																															
<i>Date</i>	2014-02-01																															
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>-0.060 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.060 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.409 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	-0.060 meters	<i>y</i>	0.060 meters	<i>z</i>	0.409 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>																			
<i>MRU to Transducer</i>	<i>x</i>		-0.060 meters																													
	<i>y</i>		0.060 meters																													
	<i>z</i>		0.409 meters																													
	<i>x2</i>																															
	<i>y2</i>																															
	<i>z2</i>																															

	<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.060 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.060 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.409 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	-0.060 meters	<i>y</i>	0.060 meters	<i>z</i>	0.409 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>	
<i>Nav to Transducer</i>	<i>x</i>		-0.060 meters																
	<i>y</i>		0.060 meters																
	<i>z</i>		0.409 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees																	
	<i>Roll2</i>																		
<i>Vessel</i>	2802_Reson7125_LF_256																		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz																		
<i>Date</i>	2014-02-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>-0.060 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.060 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.409 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	-0.060 meters	<i>y</i>	0.060 meters	<i>z</i>	0.409 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
	<i>MRU to Transducer</i>		<i>x</i>	-0.060 meters															
			<i>y</i>	0.060 meters															
<i>z</i>			0.409 meters																
<i>x2</i>																			
<i>y2</i>																			
<i>z2</i>																			
<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.060 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.060 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.409 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	-0.060 meters	<i>y</i>	0.060 meters	<i>z</i>	0.409 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>							
<i>Nav to Transducer</i>		<i>x</i>	-0.060 meters																
		<i>y</i>	0.060 meters																
		<i>z</i>	0.409 meters																
		<i>x2</i>																	
		<i>y2</i>																	
	<i>z2</i>																		
<table border="1"> <tbody> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>															
<i>Transducer Roll</i>		<i>Roll</i>	0.000 degrees																
	<i>Roll2</i>																		
<i>Vessel</i>	2803_Reson7125_HF_512																		
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz																		
<i>Date</i>	2014-02-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>-0.023 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.064 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.471 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	-0.023 meters	<i>y</i>	0.064 meters	<i>z</i>	0.471 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
<i>MRU to Transducer</i>	<i>x</i>		-0.023 meters																
	<i>y</i>		0.064 meters																
	<i>z</i>		0.471 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		

	<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.023 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.064 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.471 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	-0.023 meters	<i>y</i>	0.064 meters	<i>z</i>	0.471 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>	
<i>Nav to Transducer</i>	<i>x</i>		-0.023 meters																
	<i>y</i>		0.064 meters																
	<i>z</i>		0.471 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees																	
	<i>Roll2</i>																		
<i>Vessel</i>	2803_Reson7125_LF_256																		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz																		
<i>Date</i>	2014-02-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>-0.023 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.067 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.471 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	-0.023 meters	<i>y</i>	0.067 meters	<i>z</i>	0.471 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
	<i>MRU to Transducer</i>		<i>x</i>	-0.023 meters															
			<i>y</i>	0.067 meters															
<i>z</i>			0.471 meters																
<i>x2</i>																			
<i>y2</i>																			
<i>z2</i>																			
<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>-0.023 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.067 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.471 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	-0.023 meters	<i>y</i>	0.067 meters	<i>z</i>	0.471 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>							
<i>Nav to Transducer</i>		<i>x</i>	-0.023 meters																
		<i>y</i>	0.067 meters																
		<i>z</i>	0.471 meters																
		<i>x2</i>																	
		<i>y2</i>																	
	<i>z2</i>																		
<table border="1"> <tbody> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>															
<i>Transducer Roll</i>		<i>Roll</i>	0.000 degrees																
	<i>Roll2</i>																		
<i>Vessel</i>	2804_Reson7125_HF_512																		
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz																		
<i>Date</i>	2014-02-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>0.040 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.070 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.395 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	0.040 meters	<i>y</i>	0.070 meters	<i>z</i>	0.395 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
<i>MRU to Transducer</i>	<i>x</i>		0.040 meters																
	<i>y</i>		0.070 meters																
	<i>z</i>		0.395 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		

	<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>0.040 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.070 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.395 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	0.040 meters	<i>y</i>	0.070 meters	<i>z</i>	0.395 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>		<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>	
<i>Nav to Transducer</i>	<i>x</i>		0.040 meters																
	<i>y</i>		0.070 meters																
	<i>z</i>		0.395 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees																	
	<i>Roll2</i>																		
<i>Vessel</i>	2804_Reson7125_LF_256																		
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz																		
<i>Date</i>	2014-02-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>0.040 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.070 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.395 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	0.040 meters	<i>y</i>	0.070 meters	<i>z</i>	0.395 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
	<i>MRU to Transducer</i>		<i>x</i>	0.040 meters															
			<i>y</i>	0.070 meters															
<i>z</i>			0.395 meters																
<i>x2</i>																			
<i>y2</i>																			
<i>z2</i>																			
<table border="1"> <tbody> <tr> <td rowspan="6"><i>Nav to Transducer</i></td> <td><i>x</i></td> <td>0.040 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.070 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.395 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>Nav to Transducer</i>	<i>x</i>	0.040 meters	<i>y</i>	0.070 meters	<i>z</i>	0.395 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>							
<i>Nav to Transducer</i>		<i>x</i>	0.040 meters																
		<i>y</i>	0.070 meters																
		<i>z</i>	0.395 meters																
		<i>x2</i>																	
		<i>y2</i>																	
	<i>z2</i>																		
<table border="1"> <tbody> <tr> <td rowspan="2"><i>Transducer Roll</i></td> <td><i>Roll</i></td> <td>0.000 degrees</td> </tr> <tr> <td><i>Roll2</i></td> <td></td> </tr> </tbody> </table>	<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees	<i>Roll2</i>															
<i>Transducer Roll</i>		<i>Roll</i>	0.000 degrees																
	<i>Roll2</i>																		
<i>Vessel</i>	S221_Simrad-EM710_ICE																		
<i>Echosounder</i>	Kongsberg Simrad EM710 0.5x1 100 kilohertz																		
<i>Date</i>	2014-01-01																		
<i>Offsets</i>	<table border="1"> <tbody> <tr> <td rowspan="6"><i>MRU to Transducer</i></td> <td><i>x</i></td> <td>0.000 meters</td> </tr> <tr> <td><i>y</i></td> <td>0.000 meters</td> </tr> <tr> <td><i>z</i></td> <td>0.000 meters</td> </tr> <tr> <td><i>x2</i></td> <td></td> </tr> <tr> <td><i>y2</i></td> <td></td> </tr> <tr> <td><i>z2</i></td> <td></td> </tr> </tbody> </table>	<i>MRU to Transducer</i>	<i>x</i>	0.000 meters	<i>y</i>	0.000 meters	<i>z</i>	0.000 meters	<i>x2</i>		<i>y2</i>		<i>z2</i>						
<i>MRU to Transducer</i>	<i>x</i>		0.000 meters																
	<i>y</i>		0.000 meters																
	<i>z</i>		0.000 meters																
	<i>x2</i>																		
	<i>y2</i>																		
	<i>z2</i>																		

<i>Nav to Transducer</i>	<i>x</i>	0.000 meters
	<i>y</i>	0.000 meters
	<i>z</i>	0.000 meters
	<i>x2</i>	
	<i>y2</i>	
	<i>z2</i>	
<i>Transducer Roll</i>	<i>Roll</i>	0.000 degrees
	<i>Roll2</i>	

## C.1.2 Layback

Layback correctors were not applied.

## C.2 Static and Dynamic Draft

### C.2.1 Static Draft

#### C.2.1.1 Description of Correctors

Static draft correctors are the *z*-values used to describe the difference between the measured waterline on the hull and the reference point while the vessel is at rest. Since the distance between the reference point and transducers is known, it is elementary to derive the difference between the water line and the transducer. This value is required to correct for the draft of the transducer when computing the corrected water depths.

#### C.2.1.2 Methods and Procedures

For Rainier survey launches, all static draft corrector values are stored in the CARIS HVF as the waterline value. This value is measured during the HSRR, as described in section A.1. of this report, and used for the entire field season. It is assumed that this value remains relatively unchanged since little difference in draft has been seen under various fuel loading conditions.

For Rainier, static draft corrector values are entered in the Kongsberg SIS Installation Parameters window. Unlike survey launches, loading conditions on the ship, particularly fuel and launches, does have a significant influence on static draft. To compensate, during the Kongsberg start up procedure static draft values are measured as described in section A.1 of this report. In addition to being entered into the SIS Installation Parameters window, waterline values are also entered in the CARIS HVF. This Waterline value in CARIS will only be used during Sound Velocity Correction. The Apply switch is also set to “No”. If it is set to “Yes”, the waterline value will be applied twice, once in SIS and again in Merge.

### C.2.2 Dynamic Draft

### **C.2.2.1 Description of Correctors**

The purpose of the dynamic draft and settlement & squat measurements (DDSSM) is to correlate a vessel's speed through the water with the vertical rise/fall of the vessel's Inertial Navigation System (INS) reference point (typically chosen to be coincident with Inertial Measurement Unit, IMU). Since Rainier's launches lack a method of accurately logging speed through the water, the GPS-based speed over ground (SOG) is used as a proxy. Consequently, the presence of currents introduce errors into the DDSSM that must be mitigated by careful planning of data acquisition methods. Ideally, this test would be conducted in an area with no current, chop, or swell.

Historically, Rainier has performed DDSSM using the ellipsoidally-referenced method in Lake Washington, which is free of tidal effects, currents, and significant wave action. After the move to Newport, Oregon, this was no longer an option. Experiments using the ellipsoidally-referenced method in both open waters of the Pacific Ocean and in the Yaquina River with daily currents up to 3 knots produced poor to unusable results. The best results are obtained by timing data acquisition to coincide with slack current but even these values were suspect. Further testing determined that the echosounder method using multibeam produced the best possible results in this environment. Due to all of these difficulties, the decision was made to determine the 2014 DDSSM out in the Alaska project area after the field season began.

### **C.2.2.2 Methods and Procedures**

DDSSM for all four Rainier launches were determined in May of 2014 in Kupreanof Strait on the north coast of Kodiak Island, Alaska. After seeing minor vertical offsets in areas with strong currents, further analysis of the 2014 dynamic draft curves brought into question the results obtained for launches 2801 and 2803. These two launches collected new DDSSM in August while the ship was alongside in Kodiak. The results obtained differed from those collected in May and also compared favorably with the historic values. These new dynamic draft values were backdated and applied to all data collected during the 2014 field season.

In the cases of both the May and August testing, the ellipsoidally-referenced method as described in section 1.4.2.1.2.1 of the Field Procedures Manual was the procedure used in the field. To reduce the effect of any potential current, reciprocal lines were run at each RPM step in order to get an average speed over ground for each RPM. This average speed over ground was assumed to equal the vessel's speed through the water.

DDSSM for Rainier was determined on May 1, 2013 using the ellipsoidally-referenced method just outside of Birch Bay, Puget Sound, Washington. To reduce the effect of any potential current, reciprocal lines were run at each RPM step in order to get an average speed over ground for each RPM. This average speed was used to estimate the vessel's speed through the water.

Dynamic draft and vessel offsets corrector values are stored in the HIPS Vessel Files (HVF's). Survey platforms which mount more than one acquisition system or use sonar systems with multiple frequencies have a separate HVF associated with each individual acquisition method. Each of these HVF's contains sensor offset and dynamic draft correctors that pertain to this single acquisition system. Sensor offset and dynamic draft correctors were applied to bathymetric data in CARIS during post-processing.

### **C.2.2.3 Dynamic Draft Correctors**



<i>Vessel</i>	2801	
<i>Date</i>	2014-02-01	
<i>Dynamic Draft Table</i>	<i>Speed</i>	<i>Draft</i>
	0.0	0.00
	0.5	0.00
	1.0	0.01
	1.5	0.03
	2.0	0.05
	2.5	0.06
	3.0	0.08
	3.5	0.08
	4.0	0.08
	4.5	0.07
	5.0	0.04
	5.5	-0.01
	6.0	-0.07
	6.5	-0.16
7.0	-0.27	
<i>Vessel</i>	2802	
<i>Date</i>	2014-02-01	
<i>Dynamic Draft Table</i>	<i>Speed</i>	<i>Draft</i>
	0.0	0.00
	0.5	-0.41
	1.0	-0.35
	1.5	-0.01
	2.0	0.00
	2.5	0.02
	3.0	0.03
	3.5	0.04
	4.0	0.04
	4.5	0.03
	5.0	0.02
	5.5	-0.01
6.0	-0.04	

	<i>Speed</i>	<i>Draft</i>
	6.5	-0.08
	7.0	-0.12
	7.5	-0.16
<i>Vessel</i>	2803	
<i>Date</i>	2014-02-01	
<i>Dynamic Draft Table</i>	<i>Speed</i>	<i>Draft</i>
	0.0	0.00
	0.5	-0.02
	1.0	-0.02
	1.5	-0.01
	2.0	0.01
	2.5	0.03
	3.0	0.05
	3.5	0.06
	4.0	0.06
	4.5	0.05
	5.0	0.03
	5.5	-0.01
	6.0	-0.07
	6.5	-0.16
7.0	-0.26	
<i>Vessel</i>	2804	
<i>Date</i>	2014-02-01	
<i>Dynamic Draft Table</i>	<i>Speed</i>	<i>Draft</i>
	0.0	0.00
	0.5	-0.02
	1.0	-0.02
	1.5	0.00
	2.0	0.02
	2.5	0.05
	3.0	0.06
	3.5	0.07
	4.0	0.06

	<i>Speed</i>	<i>Draft</i>
	4.5	0.03
	5.0	-0.01
	5.5	-0.07
	6.0	-0.14
	6.5	-0.22
	7.0	-0.30
<i>Vessel</i>	S221	
<i>Date</i>	2014-01-01	
	<i>Speed</i>	<i>Draft</i>
<i>Dynamic Draft Table</i>	0.0	0.00
	0.5	0.02
	1.0	0.03
	1.5	0.04
	2.0	0.04
	2.5	0.05
	3.0	0.07
	3.5	0.08
	4.0	0.11
	4.5	0.14
	5.0	0.17
	5.5	0.20
	6.0	0.23
	6.5	0.25
	7.0	0.26

## C.3 System Alignment

### C.3.1 Description of Correctors

For Rainier (S221):

As part of the upgrade to ice-hardened transducers for Rainier's EM710 system, Kongsberg service engineers attended the sea acceptance trials. As part of these trials, Rainier conducted MBES calibration tests for the Kongsberg EM710 installed on board. In spite of the Kongsberg multibeam system working on multiple frequencies (70-100 kHz), only one patch test is required since the system has only one transducer. The calibration procedure used follows that outlined in section 1.5.5.1 of the Field Procedures Manual.

Timing, pitch and yaw bias was determined using a steep slope. Roll bias was determined using the standard flat bottom method.

For survey launches 2802 & 2804 (SeaBat 7125 SV2):

As part of the annual HSRR, Rainier conducted MBES calibration tests for each individual multibeam system on all survey launches. Although the Sea Bat 7125 SV2 multibeam system is a dual frequency system, it uses the same transducer for both frequencies and therefore the test values obtained for one frequency should match those of the other frequency. In practice this was found not to be the case and individual roll bias values were determined for launch 2804. The procedure used follows that outline in section 1.5.5.1 of the Field Procedures Manual. Timing bias was determined using the induced roll method. Pitch and yaw bias was determined using a target on the seafloor. And finally, roll bias was determined using the standard flat bottom method.

For survey launches 2801 & 2803 (Sea Bat 7125-B):

As part of the annual HSRR, Rainier conducted MBES calibration tests for each individual multibeam system on all survey launches. The Sea Bat 7125-B multibeam system is a dual frequency system utilizing a separate transducer for each frequency and thus requiring an individual test for each frequency. The procedure used follows that outline in section 1.5.5.1 of the Field Procedures Manual. Timing bias was determined using the induced roll method. Pitch and yaw bias was determined using a target on the seafloor. And finally, roll bias was determined using the standard flat bottom method.

### **C.3.2 Methods and Procedures**

For Rainier (S221):

Data acquisition and control of the Kongsberg EM710 is handled by the program Seafloor Information System (SIS). Since the Kongsberg EM710 is a beam-steered, flat-faced transducer system, SIS needs to know the orientation of the system components to perform the necessary beam-steering calculations. Since the installation survey includes measured angular bias values of the transducers, these values are entered into SIS prior to running the patch test.

At the conclusion of the patch test, data was converted in CARIS HIPS version using an HVF file with heave, pitch, roll and timing values set to zero. Water levels, the most recent dynamic draft, and sound velocity were applied and the data merged before cleaning via Swath Editor. Biases were determined using the CARIS HIPS Calibration tool by four individual testers. The multiple values determined for each bias by individual testers were examined by a reviewer, and obvious outliers rejected before an average was determined. This average value was then applied to the bias in question and applied to the data before moving on to the next bias determination. Bias values were determined in the following order; timing, pitch, roll, and finally yaw. These averaged values were then summed with the corresponding surveyed values already entered into SIS and established as the final correctors. These final correctors were entered into SIS while the values entered in the CARIS HVF remained blank.

In addition to average values, standard deviation was also determined for each bias. These values were then used to adjust the Timing (s), MRU Roll/Pitch, and MRU Gyro uncertainties under TPU values in the HVF.

Subsequent survey operations revealed a slight roll-bias value remained with the Kongsberg EM710 data. The value of this bias was determined by examination of the affected data using the CARIS HIPS Calibration tool and entered into the CARIS HVF file.

For all survey launches:

Data was converted in CARIS HIPS version using an HVF file with heave, pitch, roll and timing values set to zero. True heave, water levels, the most recent dynamic draft, and sound velocity were applied and the data merged before cleaning via Swath Editor. Biases were determined using the CARIS HIPS Calibration tool by at least 5 individual testers. The multiple values determined for each bias by individual testers were examined by a reviewer, and obvious outliers rejected before an average was determined. This average value was then applied to the bias in question and applied to the data before moving on to the next bias determination. Bias values were determined in the following order; timing, pitch, roll, and finally yaw. These averaged values were established as the final correctors and were added to the CARIS HVF.

In addition to average values, standard deviation was also determined for each bias. These values were then used to adjust the Timing (s), MRU Roll/Pitch, and MRU Gyro uncertainties under TPU values in the HVF.

### C.3.3 System Alignment Correctors

<i>Vessel</i>	2801_Reson7125_HF_512	
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz	
<i>Date</i>	2014-02-01	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.736 degrees
	<i>Roll</i>	-0.235 degrees
	<i>Yaw</i>	1.042 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2801_Reson7125_LF_256	
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz	
<i>Date</i>	2014-02-01	

<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.392 degrees
	<i>Roll</i>	-0.729 degrees
	<i>Yaw</i>	0.853 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2802_Reson7125_HF_512	
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz	
<i>Date</i>	2014-02-01	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-2.603 degrees
	<i>Roll</i>	-0.199 degrees
	<i>Yaw</i>	1.303 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2802_Reson7125_LF_256	
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz	
<i>Date</i>	2014-02-01	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-2.603 degrees
	<i>Roll</i>	-0.199 degrees
	<i>Yaw</i>	1.303 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2803_Reson7125_HF_512	
<i>Echosounder</i>	Reson SeaBat 7125 SeaBat 7125 (400kHz 512 Beams) 400 kilohertz	
<i>Date</i>	2014-02-01	

<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.978 degrees
	<i>Roll</i>	0.002 degrees
	<i>Yaw</i>	0.063 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2803_Reson7125_LF_256	
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz	
<i>Date</i>	2014-02-01	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	0.568 degrees
	<i>Roll</i>	0.017 degrees
	<i>Yaw</i>	0.380 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	2804_Reson7125_HF_512	
<i>Echosounder</i>	Reson SeaBat 7125 (400kHz 512 Beams) 400 kilohertz	
<i>Date</i>	2014-02-01	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.862 degrees
	<i>Roll</i>	0.854 degrees
	<i>Yaw</i>	-0.758 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds

### C.3.4 System Alignment Correctors

<i>Vessel</i>	2804_Reson7125_LF_256
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz
<i>Date</i>	2014-02-01

<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.862 degrees
	<i>Roll</i>	0.854 degrees
	<i>Yaw</i>	-0.758 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 microseconds

### C.3.5 System Alignment Correctors

<i>Vessel</i>	2804_Reson7125_LF_256	
<i>Echosounder</i>	Reson SeaBat 7125 (200kHz 256 Beams) 200 kilohertz	
<i>Date</i>	2014-05-07	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	-0.862 degrees
	<i>Roll</i>	0.962 degrees
	<i>Yaw</i>	-0.758 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	S221_Simrad-EM710_ICE (CARIS HVF)	
<i>Echosounder</i>	Simrad EM710 (0.5x1) 100 kilohertz	
<i>Date</i>	2014-07-21	
<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	0.000 degrees
	<i>Roll</i>	0.095 degrees
	<i>Yaw</i>	0.000 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds
<i>Vessel</i>	S221_Simrad-EM710_ICE (SIS)	
<i>Echosounder</i>	Simrad EM710 (0.5x1) 100 megahertz	
<i>Date</i>	2014-07-21	



<i>Patch Test Values</i>	<i>Navigation Time Correction</i>	0.000 seconds
	<i>Pitch</i>	0.255 degrees
	<i>Roll</i>	-0.308 degrees
	<i>Yaw</i>	0.035 degrees
	<i>Pitch Time Correction</i>	0.000 seconds
	<i>Roll Time Correction</i>	0.000 seconds
	<i>Yaw Time Correction</i>	0.000 seconds
	<i>Heave Time Correction</i>	0.000 seconds

## C.4 Positioning and Attitude

### C.4.1 Description of Correctors

Heave, pitch, roll and heading, including attitude biases and navigation timing errors.

### C.4.2 Methods and Procedures

Attitude and Heave data were measured with the sensors described in Section A, and applied in post-processing during SVP Correct and Merge in CARIS HIPS.

Rainier and all of her SWMB equipped survey launches utilize a heave filter integration method known as “TrueHeave” as described in Section 3 of the OCS Field Procedures Manual. This dramatically reduces the filter settling time as compared to the traditional heave filter, almost completely eliminating the need for steadying up on lines before logging can begin.

TrueHeave data were logged throughout the survey day, independent of line changes. A new POS file need be created only in the event that the acquisition computer crashes. Every “POS” file is named in such a manner to be easily identifiable with the applicable year, DN and VN (ex: 2011\_285\_2801.000). TrueHeave files are transferred to the “POSMV” folder of the CARIS preprocessed data drive (ex: H:\OPR-O190-A-11\H12289\POSMV\2801(RA-4)\DN265 contains TrueHeave data acquired by vessel 2801 on day number 265 for sheet H12289) for later submission to the PHB. In the event of computer crashes, multiple POS files have their names appended with “A”, “B”, and so on in the order they were collected. After regular CARIS data conversion, the TrueHeave file was separately loaded into HIPS, replacing the unfiltered heave values recorded in the raw data. TrueHeave is actually applied to the data, if the checkbox is marked, during the sound velocity correction process.

It is standard procedure to begin logging the POS/MV Applanix .000 file at least 5 minutes before starting bathymetric data acquisition and letting it run for at least 5 minutes afterward. Although the filter that produces the true heave values by looking at a long series of data to create a baseline needs only 3 minutes before and after the acquisition of bathymetric data, SBET processing which uses the same .000 file requires logging for 5 minutes before and after bathymetric acquisition.

It is important not log the POS/MV Applanix .000 file through UTC midnight on Saturdays. At this time the GPS seconds of the week reset. Neither POSpac nor CARIS are able to use this data and the result is a holiday in the coverage data. Hypack/Hysweep and POS/MV file logging must be stopped before UTC midnight. After UTC midnight a new POS file is started with the new day number.

Timing and attitude biases were determined in accordance with Section 1 of the Field Procedures Manual, and are described in section “C” of this report.

All Rainier survey launch offsets, dynamic draft correctors, and system bias values are contained in CARIS HIPS Vessel Files (HVF's) and were created using the program Vessel Editor in CARIS. These offsets and biases are applied to the sounding data during processing in CARIS.

Due to the workaround procedures affecting the Kongsberg EM710 implementation aboard Rainier as detailed section B.1.1.1 of this report, offsets, dynamic draft correctors, and system bias values are spread out between the ship's HVF, SIS configuration and POS/MV configuration.

## **C.5 Tides and Water Levels**

### **C.5.1 Description of Correctors**

Water level correctors are typically applied to Rainier hydrographic data by one of two methods; 1) discrete zones by way of a CO-OPS supplied zone definition file (.zdf) or by 2) TCARI, the Tidal Constituent And Residual Interpolator by way of a CO-OPS supplied TCARI grid file (.tc).

Depending on vertical control requirements, CO-OPS may require the installation of subordinate tide gauge(s) in the project area. If subordinate tide gauge(s) are used, station packages are sent to CO-OPS following installation, performance of bracketing levels, and removal as required by Section 4.6.1 of NOAA HSSD.

Upon completion of sheet, Pydro is used to generate a request for final tides which includes a times of hydrography abstract and mid/mif tracklines. This request is submitted via email to Final.Tides@noaa.gov with the project number and sheet number in the subject line of the email. Once CO-OPS receives this request, a review of the times of hydrography, final tracklines, and six-minute water level data from all applicable water level gauges is conducted.

After this review if there are no issues, CO-OPS will send a notice indicating that the tidal zoning scheme (.zdf or .tc) sent with the project instructions has been approved for final zoning. If there are discrepancies, CO-OPS will make the appropriate adjustments and forward a revised tidal zoning scheme to the ship for final processing.

#### **DISCRETE ZONES**

For daily processing, soundings are reduced to Mean Lower-Low Water (MLLW) using predicted water levels files supplied with the project instructions. The predicted water level data are applied to the survey depths in CARIS using height ratio and time correctors from a preliminary CO-OPS provided

zone definition file. No real-time tide or water level corrections of soundings took place in during data acquisition.

After the conclusion of data acquisition, CO-OPS will either accept preliminary zoning as the final zoning or supply a revised zoning file. Verified six-minute water level data is downloaded for the operating station(s) providing water level reducers for the project as listed in section 1.3.1 of the Water Level Instructions. Once all required water levels are downloaded, they are loaded from the main menu in CARIS HIPS, Process > Load Tide... and the zdf file is selected.

## TCARI

To reduced soundings to Mean Lower-Low Water (MLLW), the TCARI grid file sent from CO-OPS is loaded into Pydro. Once in Pydro the TCARI grid may be examined along with the list of tide stations that affect it. TCARI utilizes all tide stations in the project area (historical and currently operating) for harmonic constants and datums. Only those stations selected in the residual column are used for residuals. Residuals are the difference between observed water levels and predicted water levels due to non-tidal components such as meteorological effects. The TCARI Project Instructions sent for each project list the stations required for residuals that must be downloaded from the CO-OPS website.

For initial daily processing, soundings were reduced to Mean Lower-Low Water (MLLW) using predicted water levels from the preliminary TCARI file supplied with the project instructions. Applying tides with the TCARI file by itself without loading any water level data simply applies predicted tides without any of the residual correctors that observed water levels would provide.

After the conclusion of data acquisition, verified six-minute water level data for operating stations supplying residuals as listed in section 1.3.6 of the Water Level Instructions are downloaded on the MLLW datum in meters and UTC. TCARI tides are loaded and applied directly to CARIS HDCS data using Pydro. Once all required water levels are downloaded, they are loaded from the main menu bar, Tides > Load WL Data. Tide reducers are generated for HDCS bathymetry from the main tool bar, Tides > CARIS TCARI Tide > Load TCARI Tide in HIPS PVDLs. At this time HDCS data is selected by project, vessel, and day with individual lines selected with the Descend/Confirm button. TCARI then creates new "Tide", "TideLineSegments", and "TideTmIDX" files for each line of bathymetry. Once TCARI created the new tide files, the lines were re-merged in CARIS to force the changes to take effect.

TCARI automatically calculates the error associated with water level interpolation. This error is incorporated into the residual/harmonic solutions and included in the Total Propagated Error (TPE) for the survey. Although the uncertainty values input into TCARI model are 2-sigma, Pydro automatically supplies 1-sigma values to CARIS when computing uncertainty.

### **C.5.2 Methods and Procedures**

After the conclusion of data acquisition, water levels were applied to the soundings of each individual project as follows:

OPR-P136-RA-14, North Coast of Kodiak Island, Alaska

Preliminary water levels are generated using height ratio and time correctors from the CO-OPS supplied zone definition file P136RA2014CORP.zdf and verified observed water levels from NWLON stations Seldovia, AK (945-5500) and Kodiak, AK (945-7292). In addition, 30-day subordinate stations installed at Uzkosti (945-7376), Nachalni (945-7407), West Raspberry Island (945-7535), and Terror Bay (945-7493) are required to provide tidal datums, water level reducers, refinement to final zoning, and harmonic constituents.

#### OPR-P377-RA-14, South Alaska Peninsula, Alaska

Preliminary water levels are generated using height ratio and time correctors from the CO-OPS supplied zone definition file P377RA2013CORP.zdf and verified observed water levels from King Cove (945-9881). No subordinate stations were required for project OPR-P377-RA-14.

#### OPR-N305-RA-14, Strait of Juan de Fuca, Washington

Preliminary water levels are generated using height ratio and time correctors from the CO-OPS supplied zone definition file N305RA2014CORP.zdf and verified observed water levels from Friday Harbor (944-9880) and Port Townsend (944-4900). No subordinate stations were required for project OPR-N305-RA-14.

## **C.6 Sound Speed**

### **C.6.1 Sound Speed Profiles**

#### **C.6.1.1 Description of Correctors**

Sound velocity profiles for Rainier survey launches were acquired with SeaBird Electronics SeaCat SBE19 and SBE 19Plus Conductivity, Temperature, and Depth (CTD) profilers or with the Brooke Ocean Moving Vessel Profiler MVP30. For ship acquisition, sound velocity profiles were acquired with the Brooke Ocean Moving Vessel Profiler MVP200. All Rainier launches (2801, 2802, 2803, and 2804) are equipped with 24-volt electric winches attached to small swing-arm davits to deploy and recover SV profilers while the vessel is at rest.

#### **C.6.1.2 Methods and Procedures**

For both the individual SeaCat profilers, the launch mounted MVP-30, and Rainier's MVP-200, sound velocity profiles for CARIS were computed from raw pressure, temperature, and conductivity measurements using the program Velocipy. Velocipy was supplied to Rainier by the NOS Hydrographic Systems and Technology Programs N/CS11 (HSTP). Velocipy generated sound velocity profiles for CARIS in the .SVP format.

For survey launches, the speed of sound through the water was determined by a minimum of one cast for every four hours of SWMB acquisition, as strongly recommended in the NOS Hydrographic Surveys Specifications and Deliverables manual. Casts were conducted more frequently when changing survey areas, or when it was felt that conditions, such as a change in weather, tide, or current, would warrant additional

sound velocity profiles. Additionally, drastic changes in the surface sound velocity indicative of the need for a new cast were determined by observation of the real-time display of the Reson SVP 71 mounted on all Rainier SWMB launches.

While conducting survey operations on a launch with the MVP30 mounted, casts may be taken as often as every 15 minutes. This increased frequency is in part due to the ease of acquiring casts without losing time by stopping to take a static cast.

While conducting survey operations with the ship and the MVP200, the frequency of casts were determined with the aid of the program “CastTime” developed at the University of New Hampshire’s Center for Coastal and Ocean Mapping / Joint Hydrographic Center. This tool monitors oceanographic variability in real-time based on sound speed data acquired by the MVP200. From this information, CastTime provides recommendations for optimal water-column sampling intervals. As a result, ship personnel are no longer required to subjectively take casts based on some arbitrary time interval. Rather an improvement in sounding accuracy is realized with a sampling interval based on constant monitoring of oceanographic variability. In addition CastTime also prevent needless overworking of the underway profiler, saving on wear and tear maintenance costs for the MVP200 system.

When CastTime determines the need for a cast, the user is notified. After the first two casts are acquired at the configured initial sampling interval, the time of next cast is based purely on the real-time oceanographic variability and comparison to the previous cast. Each time a cast is acquired by the MVP and sent to CastTime, the data is sent automatically to SVP Editor where the profile can be viewed and edited. After any edits the cast is extended using climatological data from the World Ocean Atlas. This edited, extended cast is then sent directly to the SIS acquisition computer.

SIS also monitors changes in the surface sound speed vs. the value obtained with the last cast in real-time. The user is then warned for the need of a new cast by highlighting both the “SV Profile” and “SV Used” numerical displays in yellow with a difference greater than 3 m/s and red for a difference greater than 5 m/s.

Processed MVP casts sent directly to the Kongsberg EM710 are applied to all subsequent SWMB data. This method has the drawback that the MVP cast taken prior to the collection of the SWMB data will always be applied rather than the SV cast that is geographically closest. This shortcoming may be circumvented by post applying SV data to all EM710 data in CARIS HIPS/SIPS.

All sound velocity profiles for CARIS, both CTD and MVP, are concatenated into a vessel-wide file in order of ascending time/date and saved in the appropriate vessel subdirectory of each sheet’s SVP folder. At the discretion of each individual sheet manager, a sheet-wide concatenated containing all sound velocity profiles may be generated and saved in the root of each sheet’s SVP folder. These concatenated file(s) are then applied to all HDCS data acquired, including that of the EM710, with the option “Nearest in distance within time (4 Hours)” selected under the “Profile Selection Method”.

On occasion, SV issues seen in the sounding data as characteristic “smiles” and “frowns” may force the Hydrographer to deviate from this standard. Refer to individual Descriptive Reports for further information regarding the application of sound velocity correctors specific to each survey.

## **C.6.2 Surface Sound Speed**

### **C.6.2.1 Description of Correctors**

All multibeam systems utilized on aboard Rainier require a sound velocity probe to be interfaced with the sonar acquisition unit for use in projector steering computations. During all survey operations, surface sound velocity probes are on at all times. In the event of a velocity probe failure, survey operations immediately cease until the failure is corrected.

### **C.6.2.2 Methods and Procedures**

The Reson 7125-B SWMB systems utilized on vessels 2801 and 2803 require a sound velocity probe to be interfaced with the sonar acquisition unit for use in projector beam steering computations. A Reson SVP 71 surface sound velocity probe is utilized to feed real time SV values directly into the 7-P Sonar Processing Unit.

The Reson 7125 SV2 SWMB systems utilized on vessels 2802 and 2804 require a sound velocity probe to be interfaced with the sonar acquisition unit for use in projector beam steering computations. A Reson SVP 71 surface sound velocity probe is utilized to feed real time SV values directly into the 7-P Sonar Processing Unit.

The Kongsberg EM 710 multibeam systems utilized on aboard Rainier requires a sound velocity probe to be interfaced with the sonar acquisition unit for use in projector steering computations. A Reson SVP 70 surface sound velocity probe is utilized to feed real time SV values directly into the acquisition computer for use in beam steering calculations. Rainier's MVP is also interfaced to send cast information directly to the SIS acquisition computer. SIS monitors changes in the surface sound speed vs. the value obtained with the last cast in real-time. The user is then warned for the need of a new cast by highlighting both the "SV Profile" and "SV Used" numerical displays in yellow with a difference greater than 3 m/s and red for a difference greater than 5 m/s.

#### **D. APPROVAL**

As Chief of Party, I have ensured that standard field surveying and processing procedures were followed during the 2014 field season. All operations were conducted in accordance with the Office of Coast Survey Field Procedures Manual (April 2014 edition), NOS Hydrographic Surveys Specifications and Deliverables (April 2014 edition), and all Hydrographic Technical Directives issued through the dates of data acquisition. All departures from these standard practices are described in this Data Acquisition and Processing Report and/or the relevant Descriptive Reports.

I acknowledge that all of the information contained in this report is complete and accurate to the best of my knowledge.

Approved and Forwarded:

\_\_\_\_\_  
Edward J. Van Den Ameele, CDR/NOAA  
Commanding Officer  
NOAA Ship *Rainier*

In addition, the following individual was also responsible for overseeing data acquisition and processing of this project:

Chief Survey Technician:

\_\_\_\_\_  
James B. Jacobson  
Chief Survey Technician  
NOAA Ship *Rainier*

Field Operations Officer:

\_\_\_\_\_  
Adam Pfundt, LTJG/NOAA  
Field Operations Officer  
NOAA Ship *Rainier*

