		NOAA FORM 76-35A				
	NATIONAL	U.S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION NATIONAL OCEAN SERVICE				
	DESCRIPTIVE REPORT					
439		Hydrographic/Lidar Survey N/A H11439				
		LOCALITY				
	State	Alaska				
	General Locality	Southwest Alaska Peninsula Pavlof Islands and Vicintiy				
	Sublocality	Outer Iliasik Island to Goloi Island				
		2005				
		CHIEF OF PARTY Darren Stephenson, Tenix LADS				
	DATE	LIBRARY & ARCHIVES				
	1					

U.S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION	REGISTRY No				
HYDROGRAPHIC TITLE SHEET	H11439				
<b>INSTRUCTIONS</b> – The Hydrographic Sheet should be accompanied by this form, filled in as completely as possible, when the sheet is forwarded to the Office.	FIELD No: N/A				
State <u>Alaska</u> General Locality <u>Southwest Alaska Peninsula, Pavlof Islands</u>					
Sub-Locality Outer Iliasik Island to Goloi Island					
Scale 1:10,000 Date of Survey Apri	l 29 to August 12, 2005				
Instructions dated April 18, 2005 and June 17, 2005 Project No. OPR	-P184-KRL-05				
Vessel Tenix LADS Aircraft, VH - LCL					
,					
Chief of party D.J. Stephenson					
Surveyed by M. J. Sinclair, S.R. Ramsey, M.S. Hawkins, T.M. Farrow, J.K.	Young, B.C. McWilliam, et al				
Soundings by Laser Airborne Depth Sounder					
SAR by Toshi Wozumi Compilation by Katie I	Dosor				
	(CSC1				
Soundings compiled in Fathoms and Tenths					
REMARKS: All times are UTC. UTM Projection 4					
The purpose of this survey is to provide contemporary surveys to update Nati	onal Ocean Service (NOS)				
nautical charts. All separates are filed with the hydrographic data. Revisions					
generated during office processing. Page numbering may be interrupted or non sequential.					

### DESCRIPTIVE REPORT TO ACCOMPANY

### HYDROGRAPHIC SURVEY H11439

### SCALE 1:10,000, SURVEYED IN 2005

### TENIX LADS AIRCRAFT, VH-LCL

### TENIX LADS, INC. (TLI)

### MARK SINCLAIR, HYDROGRAPHER

**PROJECT<sup>1</sup>Original:Project Number:** OPR-P184-KRL-05**Original:Date of Instructions:** April 18, 2005 and June 17, 2005**Task Ord** 

**Original:** DG 133C-03-CQ-0011 **Task Order:** T0007

#### **Date of Supplemental Instructions:**

- May 7, 2003 email regarding meeting with PHB, NOAA and November 24, 2004 e-mail regarding SOW revision.
- Modification to Task Order 7 dated June 17, 2005.
- Email dated September 21, 2006 regarding locality name.
- Email dated August 2, 2006 regarding sheet limits.
- Email dated October 5, 2006 regarding the name of Iliasik.

Sheet Number: D Registry Number: H11439

# PURPOSE

To provide NOAA with modern, accurate hydrographic survey data with which to update the nautical charts of the assigned area.

# A. AREA SURVEYED

The LADS Mk II aircraft operated out of Sand Point Airport from April 29 to August 12, 2005. During this period twenty-four survey sorties were flown under Task Order 7 OPR-P184-KRL-05, Southwest Alaska Peninsula, Pavlof Islands, AK. Survey operations covered six smooth sheets. This Descriptive Report describes Sheet D, which covers Outer Iliasik Island to Goloi Island (see Figure 1 and Figure 2).

During the processing of the data all sheet limits were re-aligned and adjusted slightly. This is explained in part in Figures 1 and 2 and in supplemental correspondence in Appendix V.

During this period survey operations were also conducted in the Shumagin Islands under OPR-P183-KRL-05, and five forward deployments were made to Sitka for operations in the

Approaches to Sitka Sound under OPR-O112-KRL-05. These other surveys are reported separately.

Environmental factors such as wind strength and direction, cloud cover, high ground and water clarity influenced the area of data acquisition on a daily basis. See section B.2 Quality.

The planned and actual linear miles sounded for the areas are provided at Appendix III. The sheet limits are as follows for Sheet D:

	Latitude (NAD 83)	Longitude (NAD 83)
NW corner	55°.12057624	161°.97340387
NE corner	55°.12062841	161°.85428394
SW corner	55°.00607952	161°.97308753
SE corner	55°.00612758	161°.85430740


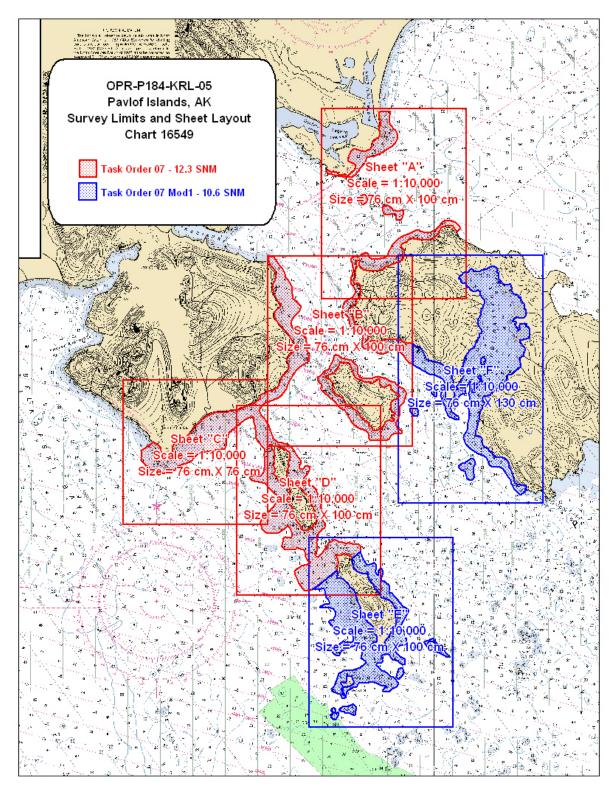


Figure 1 - Survey Area for Task Order 7 OPR-P184-KRL-05 including the modification



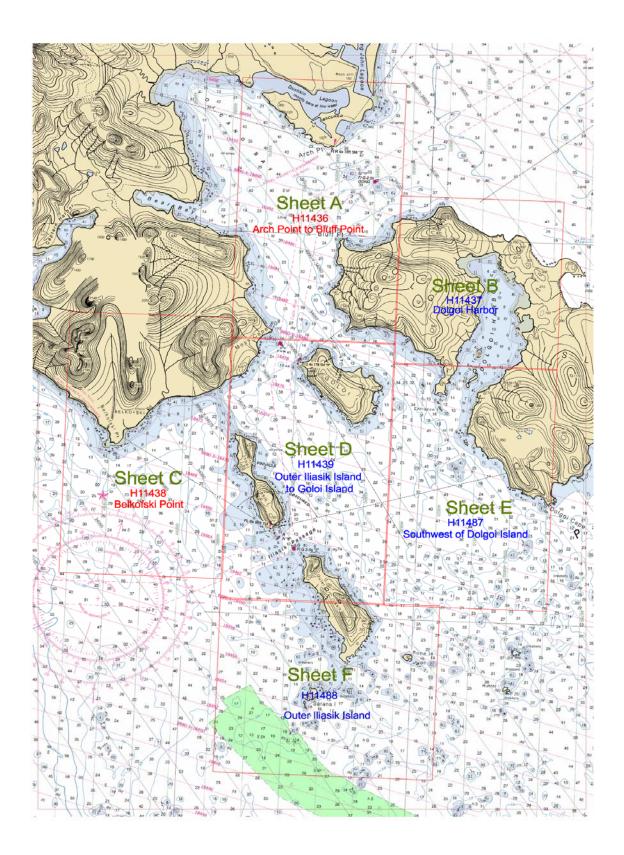

# **B.** ACQUISITION AND PROCESSING

Refer to the Data Acquisition and Processing Report for a detailed description of the equipment, processing and quality control procedures. A general description and items specific to this survey are discussed in the following sections.

### **B.1 EQUIPMENT**

Data collection was conducted using the LADS Mk II Airborne System, data processing using the LADS Mk II Ground System and data visualization, quality control and final products using Caris HIPS 5.3, GMT/VTK, Terramodel and MicroStation version 8.

A protype Digital Imagery capture system was installed at the commencement of this survey, which allowed digital images from the downward looking video to be captured.

### B.1.1 Airborne System

The LADS Mk II Airborne System (AS) consists of a Dash 8-200 series aircraft, which has a transit speed of 250 knots at altitudes of up to 25,000 feet and an endurance of up to eight hours. Survey operations are conducted from heights between 1,200 and 2,200 feet at ground speeds between 140 and 175 knots. The aircraft is fitted with a Nd: YAG laser which is eye safe in accordance with ANSI Z136.1-2000, American National Standard for Safe Use of Lasers. The laser operates at 900 Hertz from a stabilized platform to provide 5x5 or 4x4 meter laser spot spacing in the main line sounding mode of operation. These two modes of data capture resolution require an over ground aircraft speed of 175 and 140 knots respectively. The electro-mechanical scanner also provides examination modes of sounding with laser spot spacings of 3x3 and 2x2 meters and swath widths of 100 and 50 meters respectively.

Green laser pulses are scanned beneath the aircraft in a rectilinear pattern. The pulses are reflected from the land, sea surface, within the water column and from the seabed. The green returned laser energy is captured by the green receiver and then digitized and logged onto digital linear tape. An infra-red beam is also directed vertically beneath the aircraft. The height of the aircraft is determined by the infra-red laser return, which is supplemented by the inertial height from the Attitude and Heading Reference System and GPS height. The LADS Mk II system can operate by day and night. The depth penetration of the system may be improved at night by removing the daylight filter from the receiving optics. Survey operations may be restricted at night by elevations in or near the survey area, which may invoke civil aviation lowest safe altitude rules. Real-time positioning is obtained by either an Ashtech GG24 GPS receiver providing autonomous GPS or Fugro OmniStar WADGPS where coverage is available. Ashtech Z12 GPS receivers are also provided as part of the Airborne System and Ground Systems to log KGPS data on the aircraft and at a locally established GPS base station.

### B.1.2 Ground System

The LADS Mk II Ground System (GS) 'Forrest' was used to conduct data processing in the field. Forrest consists of a portable Compaq Alpha ES40 Series 3 processor server with 1 GB EEC RAM, 764 GB disk space, digital linear tape (DLT) drives and magazines, digital audio tape (DAT) drive, CD ROM drive and is networked to up to 12 Compaq 1.5 GHz PCs and a HP 800ps Design Jet Plotter, printers and QC workstations. Forrest was transported to the deployment site. Quality control checks and editing of the data were also conducted on Ground System Forrest. GS 'Forrest' was destroyed by hurricane Katrina at the Biloxi office on August 29, 2005 and was replaced by GS 'Katrina'.

The GS supports survey planning, data processing, quality control and data export. The GS component also includes a KGPS base station, which provides independent post-processed position and height data. A comprehensive description of the GS is provided in the Data Acquisition and Processing Report.

# **B.2 QUALITY**

#### B.2.1 Data Density

The survey area was sounded at 4x4 meter laser spot spacing with main lines of sounding spaced at 80 meters, which provided the required 200% coverage.

At the sea surface the footprint of the laser beam is approximately 2.5 meters in diameter. As the beam passes through the water column it slowly diverges due to scattering. It should be noted that at 4x4 meter laser spot spacing there is a gap of between 1 to 1.5 meters between the illuminated area of adjacent soundings at the sea surface. There is a possibility that small objects in shallow water along the coastline may fall between consecutive 4x4 meter soundings and not be detected.

### B.2.2 Water Clarity

The water clarity in the survey area was generally good for laser survey; however, it did vary from poor to excellent and this required close management and extra lines to be planned. Water depths up to 30 meters were achieved in the survey area, however in general good coverage was achieved to maximum depths of 15 to 20 meters.

#### B.2.3 Data Management

The database is identified as follows:

Database Name	<b>General Locality</b>	Sheet(s)
05_7Pavlof	Pavlof Islands	D

A detailed table of databases and line numbers is presented in the Data Acquisition and Processing Report.

### B.2.4 Data Acquisition

Survey operations were planned when suitable weather conditions prevailed. The first survey sortie was flown on April 29, 2005. Survey sorties were conducted when there was minimal low cloud in the survey area and this generally occurred if the wind was below 20 knots from the west to the north. In general the aircraft departed at 1400 hours local time. The final survey sortie was conducted on August 12, 2005.

Several survey sorties were conducted in the early morning during low water spring tides to enable data acquisition over exposed rocks in kelp.

### B.2.5 Sea Conditions - Sea State, Waves, Swell, White Water

The sea state ranged from 1 to 3 throughout the survey and was generally state 2. This did not affect data quality except where significant white water occurred around rocks in exposed areas of the headlands. White water creates saturated surface pulses; where this occurred the soundings have been edited and the area reflown on a calm day.

The areas surveyed for this smooth sheet for the majority were protected and calm seas were experienced on occasions. Under such calm conditions the sea may become glassy which degrades the sea surface model. Long period swell was not significant during the survey and an allowance has been made in the assessment of accuracy.

### B.2.6 Kelp

Kelp is one of the factors that increases the complexity of a particular survey area. It is one of the reasons why 200% coverage is recommended in these areas. Kelp reduces the survey coverage achieved by lidar resulting in an increased amount of boatwork. Additional boatwork recommendations are outlined in section D.1.4 Additional Boatwork Inside Lidar Area and D.1.5. Chart Comparison Spreadsheet. Large areas of kelp exist in the survey area. Kelp also increases the amount of data processing required as more points need to be assessed and reviewed by the surveyors validating, checking, conducting quality control and approving the data.

Kelp areas can be recognized in the data by the following indications:

- Mid water column pulses, frequently with low amplitude and poorly defined leading edges.
- Returns from the seabed are highly attenuated.
- Soundings in shallow water are very sparse.
- Soundings do not correlate with overlapping data from adjacent lines.

Kelp areas appear as gaps in the data on the coverage plot. In such areas of partial coverage kelp symbols have been inserted on the smooth sheet.

Rocks detected by the system in kelp areas may be difficult to discriminate as rock or kelp returns. Where it is undetermined whether the return is from rock or kelp, a recommendation for additional boatwork is given in section D.1.5 Chart Comparison Spreadsheet.

### B.2.7 Nature of the Seabed

The seabed throughout the smooth sheet is quite regular, especially in the less exposed areas. Around Goloi Island the seabed is quite regular and good lidar coverage exists around the majority of the island. The seabed drops off quickly around the two sand spits. The southeast coast is more irregular with a number of headlands and exposed rocks and kelp. The coastline to the south of Moss Cape is quite regular with a large shallow bank extending out to the east. The seabed around Inner Iliasik Island and the northern part of Outer Iliasik Island is relatively shallow with good lidar coverage. Rock outcrops exist along the more exposed western coastlines of the islands. Many drying rocks and kelp areas are present along the coastlines.

### B.2.8 Topography

The LADS Mk II system can measure topographic heights up to 50 meters elevation, subject to the depth / topographic logging window selected. For this survey, a 20-meter topographic height logging window was selected. As a result, the coastline was surveyed and elevations up to 20 meters were measured. Above 20 meters elevation, no coverage has been achieved. On the smooth sheet the height of islets is shown in () and provided in feet above MHW. Maximum heights up to approximately 70 feet are shown as a result of the 20-meter topographic logging window.

#### B.2.9 Datums

Upon the completion of each flight the GPS data logged on the aircraft and at the base station was processed to determine the post-processed KGPS position and height of the aircraft. This data is used in the calculation of the sea surface datum.

### B.2.10 Wind

Survey operations were conducted in wind strengths of up to 20 knots during the survey. In general the wind strength during the time of survey was around 10 knots from the west to northeast. The high ridges on the peninsula to the north of the survey area caused uplift and high levels of turbulence. The wind direction also influenced the formation of low cloud and sea fog. Turbulence, low cloud and sea fog influenced the choice of survey area during sortie operations.

### B.2.11 Cloud

Low cloud was a significant factor. The wind direction affected the cloud base in the survey area. For example, in southerly or easterly conditions a low cloud base was experienced. The effects of low cloud were managed as follows:

- a. Being located in Sand Point allowed close monitoring of the current weather conditions as the survey area was only 100 km west of Sand Point. Two internet sites proved to be invaluable for forecasting the weather. An aviation site, <u>http://adds.aviationweather.gov/</u>, provided METAR data, actual wind speed and direction, cloud base and satellite cloud data. The observations were updated every 20 minutes. A NOAA weather site, <u>http://pafc.arh.noaa.gov/</u>, provided aviation and general weather.
- b. Diversion to the alternate survey area in southeast Alaska under project OPR-O112-KRL-05 occurred during prolonged poor conditions on the Alaska Peninsula.

### B.2.12 Effects of High Ground

The majority of the survey lines were flown at 2200ft especially when in close proximity to the high ground on the Peninsula. Once away from the high ground the majority of the survey operations were conducted at either 1600ft or 1800ft. The proximity of high ground to the aircraft caused severe turbulence under certain conditions. This occurred on a number of occasions when flying or operating close to the Pavlof volcano to the north of the survey area.

#### B.2.13 Receiver Gain

Changes in gain levels in the Airborne System automatically accommodate for changes in the sea surface, water column and seabed conditions. In some areas, after long over land passages, low gain levels were initially set on passing back over the water. Where this has been identified in the data these lines were reflown from the opposite direction to improve the coverage.

#### B.2.14 Raw Laser Waveforms

The raw laser waveform returns from seabed areas that were covered with kelp, are considerably attenuated. In order to detect the seabed in such areas, the threshold in the GS was lowered to detect pulses with low signal-to-noise ratios. This enabled the seabed to be detected but also resulted in increased data validation times. In some areas of kelp the seabed was completely obscured and either no signal was detected (NBD - No Bottom Determined) or noise was detected by the system.

#### B.2.15 Data Processing

The data was processed at the operating site in Sand Point on the return from each sortie. Final validation and checking were conducted at this site and Biloxi, MS. The quality control of the data was done independently in Adelaide, South Australia and the final approval was conducted in Biloxi, MS.

#### B.2.16 Progress Sketches

Progress sketches were provided to NOAA on a bi-weekly basis, copies of which can be found in Appendix III.

### **B.3 DATA FORMATS**

Data is provided in the following formats:

- Hard copy preliminary smooth sheet. Depths in decimal fathoms and heights in feet.
- Digital preliminary smooth sheet. Produced in MicroStation version 8 and saved as MicroStation version 7 .dgn file. Note contour B-splines have been re-parameterized for compatibility with MicroStation 95 used by NOAA.
- Edited data set. An ASCII file of 3 meter clashed data, which is a subset of all accepted data. Depths are in meters.
- Preliminary smooth sheet data. An ASCII file of all soundings on the smooth sheet. Depths are in meters.
- Caris compatible data. LADS soundings and waveforms, which can be imported into Caris HIPS.
- Accepted mission runs plot.
- Coverage plots and sun illuminated images. Provided in GEOTIFF format.
- Tidal Data provided in ASCII, xls and CSV formats.
- Digital georeferenced image in .tif/tfw formats.

Refer to the Data Acquisition and Processing Report for specific details.

### **B.4 BENCHMARKS**

Depth benchmark areas from the 2003 lidar survey in the Shumagin Islands and Vicinity (H11147 A – I & L – N) were used to check the performance of the LADS Mk II system for the H11439 survey. Five benchmarks were used; two are in Popof Strait and three lie on a line south of Korovin Island. These benchmarks were surveyed to check the LADS Mk II system accuracy.

Center coordinates for the benchmark areas are as follows:

Benchmark Name	Nominal Depth	Easting (NAD 83)	Northing (NAD 83)
BM_1	14.5 m	404 100	6 135 080
BM_2	5 m	403 087	6 133 148

Sand Point Benchmark Line

Korovin Benchmark Line

Benchmark Name	Nominal Depth	Easting (NAD 83)	Northing (NAD 83)
BM_3	4 m	420 620	6 141 390
BM_4	12 m	420 330	6 140 920
BM_5	18 m	420 090	6 140 363

#### **Table 1 – Benchmarks**

Either one or both benchmark lines were flown during each sortie. The total number of benchmarks compared during the survey was 22. The tidal model in use for the comparison of benchmarks was the same as the tidal model used to reduce the benchmarks during the 2003 survey. Benchmark comparisons were conducted after the application of tides. Comparison summaries are provided in the Separates.

The LADS data is compared against the gridded benchmark surface in the GS and statistics are generated which include the number of points compared, the mean depth difference (MDD) and the standard deviation (SD) between the data sets. The benchmark comparison function compares the data against the benchmark surface, and as this data is unedited it may contain noise normally removed during the validation process which is flagged as the shoalest and deepest differences.

#### *B.4.1 Mean Depth Differences (MDD) and Standard Deviation (SD)*

The benchmarks were flown independently of the database being surveyed at the time. The averages of the mean depth differences and standard deviation for each benchmark run are as follows:

GS ID	BM Name	Nominal Depth	MDD	SD
1	BM_1	14.5 m	0.05 +/- 0.13	0.15+/-0.05
2	BM_2	5 m	0.07 +/- 0.03	0.11 +/- 0.02

#### N. Popov Straight Benchmarks

#### Korovin Benchmarks

GS ID	BM Name	Nominal Depth	Average MDD	SD
3	BM_3	4 m	-0.02 +/- 0.01	0.26 +/- 0.06
5	BM_4	12 m	0.24 +/- 0.06	0.17 +/- 0.01
5	BM_5	18 m	0.31 +/- 0.11	0.15 +/- 0.01

#### Table 2 – Benchmark Results

These results are within expected tolerances and show that the LADS Mk II depth performance was within specifications. There are higher than expected MDD for BM\_4 and

BM\_5. However, these results compare well with the 2003 and 2004 surveys and indicate that the LADS Mk II system operated correctly during the survey.

### **B.5** CROSSLINES

Six crosslines were flown in the OPR-P184-KRL-05 survey area, one of which is on Sheet D (H11439). The crosslines were planned to cover where the seabed was reasonably flat. The crossline areas identified to conduct crossline comparisons were selected based on data coverage, nature of the seabed and angle of intersection. This minimizes the apparent differences in depths due to minor positional differences in steeper areas of seabed.

The crossline was sounded at 4x4 meter laser spot spacing throughout the survey area as follows:

Line 1203.0.1 51 crossline intersections. Along the southwest coast of Goloi Island

#### *B.5.1 Mean Depth Differences (MDD) and Standard Deviation (SD)*

The averages of the mean depth differences and standard deviation for each crossline are as follows:

Run No.	Comparisons	Mean Confidence	Average MDD	Average SD
1203.0.1	77884	5.1	-0.02 +/- 0.09	0.31 +/- 0.26


#### Table 3 – Crossline Comparison Results

Crossline comparison details are provided in Appendix V of the Separates.

All depth comparison results are consistent with IHO Order-1 depth accuracy.

#### **B.6 ANALYSIS OF RESULTS**

A sounding histogram has been produced of the column and occurrence of each sounding shown on the smooth sheet. It is noted that there is a slightly lower yield from columns close to nadir which is usual. Due to the 80 meter line spacing and 200 meter swath width, the middle sounding columns are covered by overlapping lines on both sides, and so is effectively covered at 300% compared with 200% for the outer columns. This generally results in a slightly lower yield from columns close to nadir and near the edges of the scan. There is a slightly higher yield in columns 1, 2 and 48 than expected, however this is not considered to be material. The graph shows that there are no significant scan angle biases on the data.

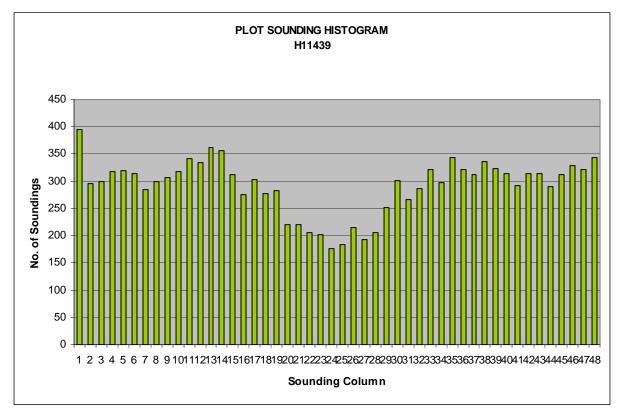

Graph 1 – Sounding Histogram of Smooth Sheet H11439

### **B.7 POSITION CHECKS**

Two independent positioning systems were used during the survey. Real-time positions were determined by autonomous GPS. A post-processed KGPS position was also determined relative to a local GPS base station that was established on the rooftop of the Popof Pizza Building at the processing facility in Sand Point. The post-processed KGPS positions were applied to each sounding during post-processing.

Position checks were conducted prior to, during and following data collection as follows:

- a. DGPS Site Confirmation. A 24-hour certification was conducted of the local GPS base station established at the processing facility on the roof at the Popof Pizza building at Sand Point.
- b. Static Position Check. Prior to commencing data collection the coordinates of the aircraft GPS antenna were determined relative to three marks, which were surveyed on the tarmac at Sand Point Airport. Data was then logged by each LADS Mk II positioning system enabling the positions to be checked against the known surveyed points. The accuracy of the KGPS solution during the static position check was 0.179 meters (95% confidence). The results and details of the static position check are enclosed in the Vertical and Horizontal Control Report.
- c. Dynamic Position Check. During each sortie GPS data was logged on the aircraft and at the local GPS base station. This provided a check between the real-time GPS and post-processed positions. The mean difference between the real-time and post-processed position was 2.381 meters, with an average standard deviation of 0.323 meters. Details are provided in the Vertical and Horizontal Control Report.
- d. Navigation Position Check. Navigation checks were also conducted over the local GPS base station on the roof of the processing facility. This enabled the known position of the structure to be checked against the image on the downward looking video. This provided a gross error check of position. The mean error was 2.82 meters with a standard deviation of 2.43 meters. Details are provided in the Separates.
- e. Position Confidence. The position quality was also monitored by checking a postprocessed position confidence (C3), which is determined from the AS platform error, GPS error and residual errors between the actual GPS positions and aircraft position as determined from the line of best fit. No position anomalies were detected.

The position checks were within the expected tolerances and showed that the positioning systems were functioning correctly.

#### **B.8 CORRECTIONS TO SOUNDINGS**

Refer to the Data Acquisition and Processing Report for a description of corrections to soundings, which demonstrates that corrections to the soundings were being applied correctly.

There were no deviations from the corrections described therein.

# C. VERTICAL AND HORIZONTAL CONTROL

Refer to the Vertical and Horizontal Control Report for a detailed description of the vertical and horizontal control used during this survey. A summary of vertical and horizontal control for the survey follows.

### C.1 VERTICAL CONTROL

Vertical control for the survey was based on the Mean Lower Low Water tidal datum (MLLW). The operating National Water Level Observation Network (NWLON) station at Sand Point, AK (945-9450) established vertical control for the LADS depth benchmark areas and for datum determination at the subordinate tide station installed at Dolgoi Harbor, Dolgoi Island. The Dolgoi Harbor tide station served as vertical control for the survey areas around the Pavlof Islands.

Station details are as follows:

		WGS84		
Gauge	Location	Latitude	Longitude	
945-9758	Dolgoi Harbor, Dolgoi Island	55° 07.2' N	161° 47.5' W	

Table 4 – Dolgoi Harbor Tide Gauge

# C.2 ZONING

NOAA initially supplied tide zones that cover the extent of the survey, with time and range correctors relative to the Sand Point tide station. These were superseded by the final tide zoning computed by JOA once the tide gauges at Dolgoi Island were recovered. The initial and final tide zones are as follows:

Tide Zone	<b>GS Identifier</b>	Time Corrector	<b>Range Corrector</b>	<b>Reference Station</b>
SWA193A	1	+0 minutes	x1.02	945-9450
SWA204A	2	+0 minutes	x1.00	945-9450
SWA205	3	+6 minutes	x0.94	945-9450
SWA218	4	+6 minutes	x0.91	945-9450
D1	5	+0 minutes	x1.00	945-9758

#### Table 5 – Tide Zones

An analysis of simultaneous tides at Sand Point and Dolgoi Harbor for the period May 1, 2005 to July 31, 2005 enabled JOA to compute final datum for the Dolgoi Harbor tide station. Full

details of this analysis can be found in the Dolgoi Harbor Tide Station Report prepared by JOA dated December 16, 2005.

This report has been supplied digitally on the USB hard drive in the tides directory in PDF format and sent to CO-OPS.

The final tide zone for H11439 is tide zone D1, details are provided in A.3.3 of the Vertical and Horizontal Control Report.

An analysis of crossline and overlaps of the mainlines of soundings concluded that the proposed final tide zoning was adequate and therefore the proposed final tide zoning correctors have been considered to be the final tide zoning correctors for the survey.

The derived value at Dolgoi Harbor tide station for the difference between MLLW and MHW is 1.865m. From the final tide zoning a range factor 1.00 was used for H11439, Sheet D to determine a MHW of 1.865m or 1.020 fathoms.

The final tides were supplied by John Oswald and Associates. The final verified tide data was checked against predicted tides to ensure there were no meteorological effects at the tide gauge. The corrected gauge data was smoothed using a fifth order polynomial of five hours length and then supplied to Tenix LADS, Inc. for the application of tides.

For final processing, the time and amplitude correctors were applied to the tidal data delivered by JOA. Soundings were then reduced to MLLW using these corrected tides.

#### C.3 HORIZONTAL CONTROL

Data collection and processing were conducted on the Airborne and Ground Systems in World Geodetic System (WGS84) on Universal Transverse Mercator (Northern Hemisphere) projection UTM (N) in Zone 4, Central Meridian 159° West. All units are in meters. This data was post-processed and all soundings are relative to the North American Datum 1983 (NAD 83).

#### C.3.1 LADS Local GPS Base Station – Sand Point

Real-time positions were determined using an Ashtech GG24 GPS receiver. A local GPS base station was coordinated by John Oswald and Associates on the roof of the Popof Pizza Building at the processing facility, Sand Point, AK on March 28 - 29, 2004.

The derived NAD83 coordinates for the local GPS base station, are:

NAD 83		UTM (N) Zone 4		
Latitude (N)	Longitude (W)	Easting (m)	Northing (m)	Ellipsoidal Height (m)
55° 20' 42.544"	160° 28' 53.447"	406 048.735	6 134 199.851	72.980

#### Table 6 – GPS Base Station

Post-processed KGPS positions were determined off-line using data logged at the local GPS base station and on the aircraft. This data was processed through Ashtech PNAV software to calculate both a DGPS and KGPS position solution. The post processed KGPS positions were then imported into the GS and applied to all soundings. This provided increased sounding position accuracy and horizontal redundancy.

The local GPS base station site was checked for obstructions and multipath over a 24-hour period on April 30 and May 1, 2005. The results outlined in the Vertical and Horizontal Control Report reveal that the local GPS base station site is free from site specific problems such as multipath and obstructions.

On April 28, 2005 static position checks of the LADS Mk II positioning systems were undertaken using a three-point control network established at the Sand Point Airport. The results outlined in the Vertical and Horizontal Control Report revealed no gross errors and that all positioning systems functioned correctly.

During each sortie, GPS data was logged both on the aircraft and at the local GPS base station, which enabled a post-processed KGPS position solution to be determined. These positions were then compared to the position determined by the real-time positioning system. This dynamic positioning check provided quality control of the positioning systems and the positional differences were within tolerance for the survey. These differences are tabulated in the Vertical and Horizontal Control Report.

Navigation position checks were conducted over the local GPS base station during each sortie when suitable weather conditions prevailed. Following each sortie the logged aircraft position was processed against the downward looking video record to determine the difference in position at the time of overflight. This provided a gross error check on the aircraft positioning.

The tabulated results are presented in the Vertical and Horizontal Control Report and revealed that the positioning systems functioned to within expectations.

# D. RESULTS AND RECOMMENDATIONS

Recommendations for charting action for smooth sheet H11439 is provided in sections D.1.1 to D.1.7 below.

In the vicinity of steep coastline some contours on the smooth sheet appear unsupported by the smooth sheet soundings. Particularly around the MLLW depth curve, additional soundings were added from a 15m-clashed dataset. The 15m-clashed dataset was imported into MicroStation Layers "15m\_DPT" and "15m\_DRY". Where an additional sounding was deemed necessary for the smooth sheet, one would be selected from either the 15m\_DPT or 15m\_DRY MicroStation Layer and placed on the "ADD\_DPT" or "ADD\_DRY" MicroStation Layer respectively. The "ADD\_DPT" and "ADD\_DRY" MicroStation Layer swere created in order to track soundings that were added to the smooth sheet from the 15m-clash dataset. These are provided in an additional file found with the smooth sheet plot scale clashed data.

# D.1 CHART COMPARISON - SMOOTH SHEET H11439 D

H11439 was compared to:

Preliminary Chart 16549 15<sup>th</sup> Edition July 2003, at scale 1:80,000. Corrected through NM July 26, 2003 and through LNM July 8, 2003.

This chart was downloaded from the NOAA Office of Coast Survey – NOAA Raster Navigational Charts download website (<u>http://chartmaker.ncd.noaa.gov/mcd/Raster/Index.htm</u>) on April 10, 2006.

Recommendations for charting action are described in section D.1.2 Charted Depths and Features and in the Chart Comparison Spreadsheet under section D.1.5.

### D.1.1 Dangers to Navigation

For the H11439 survey twenty nine dangers to navigation have been reported and are presented in Appendix 1.

- Item number 1 is a drying rock in kelp at the seaward extent of a rock ledge located approximately 150m west of the coastline of Inner Iliasik Island. Kelp patches exist to seaward of this drying rock.
- Item number 2 is a drying rock in kelp at the seaward extent of a rock ledge, located approximately 150m west of the coastline of Inner Iliasik Island. Kelp patches exist to seaward of this drying rock.
- Item number 3 is a possible drying rock in kelp at the seaward extent of a rock ledge approximately 200 meters off the west coast of Inner Iliasik Island. This item requires further investigation by boat if possible to confirm the drying nature of the feature amongst the kelp.

- Item number 4 is an islet amongst kelp lying at the seaward extent of a rock ledge approximately 120 meters off the west coast of Inner Iliasik Island.
- Item number 5 is a 6.4 Rk on a shoal between a charted 10 and 12 fathom approximately 1150 meters west of Inner Iliasik Island.
- Item number 6 is a 5.7 Rk located 240 meters east of a charted 6 <sup>1</sup>/<sub>4</sub> approximately 600 meters south of the south coast of Inner Iliasik Island. This rock lies just to the north of Iliasik Passage.
- Item number 7 is a rock on a shoal lying approximately 1000 meters off the southwest coast of Inner Iliasik Island and at the northwest entrance to Iliasik Passage.
- Item number 8 is a possible 8.1 Rk in kelp located approximately 1050 meters northeast of Inner Iliasik Island. This feature requires further investigation by boat if possible to determine the least depth.
- Item number 9 is a possible 4.0 Rk in kelp located approximately 900 meters off the northeast coast of Inner Iliasik Island at the entrance to a sheltered bay connecting the two parts of Inner Iliasik Island. This feature requires further examination by boat if possible to determine the least depth.
- Item number 10 is a 8.0 Rk on a shoal located approximately 1500 meters east of the east coast of Inner Iliasik Island.
- Item number 11 is a possible 6.2 Rk on a kelp covered ridge located between a charted 8 and 6 <sup>1</sup>/<sub>2</sub>. The ridge is approximately 1500 meters east of the coast of the southern part of Inner Iliasik Island. Survey coverage has been obtained over both the charted 8 and 6 <sup>1</sup>/<sub>2</sub>. This feature requires further examination to determine the least depth.
- Item number 12 is a 4.6 Rk on a shoal located adjacent to a charted 5 <sup>3</sup>/<sub>4</sub>. A number of rocks exist in the area. This area is located approximately 1800 meters west of the north coast of Outer Iliasik Island.
- Item number 13 is an 8.6 Rk located approximately 1600 meters west of the north coast of Outer Iliasik Island. Many rocks and shoals exist in this vicinity.
- Item number 14 is a possible 3.1 Rk in kelp situated at the seaward extent of a bank approximately 400 meters west of the northwest coast of Outer Iliasik Island. This feature requires further examination by boat to determine the least depth.
- Item number 15 is a 1.2 Rk in kelp on a ridge approximately 200 meters off the northwest coast of Outer Iliasik Island. The ridge extends to the south.
- Item number 16 is a possible 1.8 Rk in kelp. This feature is at the seaward extent of a kelp area approximately 150 meters off the west coast of Outer Iliasik Island. This requires further examination by boat if possible.
- Item number 17 is a 4.7 Rk located between a charted 8 and 6 ¼ at the southwest approach to Iliasik Passage. A number of similar features exist in the vicinity and this feature is approximately 1000 meters west of the northern part of Outer Iliasik Island.
- Item number 18 is a possible 0.8 Rk in kelp located on a charted 4 <sup>1</sup>/<sub>4</sub> at the southwest entrance to Iliasik Passage. This feature is approximately 650 meters west of the northwest coast of Outer Iliasik Island.
- Item number 19 is a possible 4.1 Rk in kelp approximately 300 meters off the coast of the Alaska Peninsula, south of Moss Cape. This feature requires further examination by boat to determine the least depth.
- Item number 20 is an islet amongst kelp, at the seaward extent of a ledge approximately 180 meters off the coast of the Alaskan Peninsula, south of Moss Cape.

- Item number 21 is a 1.9 possible Rk in kelp located at the seaward extent of a bank approximately 650 meters southeast of Moss Cape. This feature is approximately 100 meters east of a navigation buoy. This feature requires further examination to determine the least depth.
- Item number 22 is a 2.9 Rk on a ridge approximately 200 meters off the west coast of Goloi Island.
- Item number 23 is a 5.5 possible Rk in kelp approximately 350 meters south of the south coast of Goloi Island. This feature requires further examination by boat to determine the least depth.
- Item number 24 is a 4.6 possible Rk in kelp at the seaward extent of a large kelp area approximately 350 meters off the southeast coast of Goloi Island. This feature requires further examination by boat to determine the least depth.
- Item number 25 is a 3.7 possible Rk in kelp on a charted 8 approximately 850 meters off the southeast coast of Goloi Island. This feature requires further examination by boat to determine the least depth.
- Item number 26 is a 7.6 possible Rk in kelp on a charted 11 approximately 250 meters off the southeast coast of Goloi Island. This feature requires further examination by boat to determine the least depth.
- Item number 27 is a possible 9.2 Rk in sparse data to seaward of a charted 11, approximately 600 meters off the east coast of Goloi Island. This feature requires further examination by boat to determine the least depth.
- Item number 28 is a (-3) drying rock at the seaward extent of a rock ledge approximately 150 meters off the east coast of Goloi Island.
- Item number 29 is a 2.4 possible Rk in kelp at the entrance to a bay approximately 300 meters off the northeast coast of Goloi Island.

### D.1.2 Charted Depths and Features

Source data for the chart in this area was acquired between 1900-1939. Only partial bottom coverage was obtained. The area surveyed is represented on the smooth sheet in considerably more detail than is currently shown on the chart. In particular, the position of the coastline, islets, drying rocks and rocks are more accurately portrayed on the smooth sheet.

The following general recommendations are relevant:

- a. Coastline. The charted coastline is highly generalized. The surveyed coastline differs from the charted position by up to 100 meters throughout the smooth sheet. The main difference occurs at random intervals along the coastline. It is recommended that the coastline on the chart be amended to match the smooth sheet.
- b. Inshore Islets. A number of islets have been surveyed close to the coastline. Many of these are not shown on the chart, as the charted coastline is highly generalized. In particular, along the southwest coast of Inner Iliasik Island a number of charted islets have been surveyed up to 150 meters from the charted position. It is recommended that the chart be amended to match the smooth sheet. Where significant these islets are detailed in the Chart Comparison Spreadsheet D.1.5.

c. Rocks. A number of rocks and drying rocks have been surveyed along the coastline that are not shown on the chart due to the unsurveyed nature of the area. It is recommended that the chart be amended to match the smooth sheet. Where significant, these rocks are detailed in the Chart Comparison Spreadsheet D.1.5.

In addition to the general recommendations above, some 186 significant differences between the chart and the smooth sheet have also been identified. Specific recommendations for these differences are described in the Chart Comparison Spreadsheet. An expanded version of the spreadsheet is included digitally on the survey report CD. The digital .xls version contains information that may be useful for planning of boat sounding and easy to download into other survey packages and has the file name H11439\_V1\_ChartComp.xls.

The chart comparison was conducted by reviewing the chart, the lidar coverage plot, the digital orthophoto mosaic and the lidar smooth sheet. For each item identified, screen dumps of the Local Area Display and Raw Waveform Display were extracted from the LADS Mk II Ground System. These have been reviewed in order to make the following assessments:

- a. Type of Feature
- b. Kelp Area
- c. Further Examination Recommended
- d. Charting Recommendation
- e. Remarks

Each chart comparison was categorized as follows:

- 1. New shoal found
- 2. Charted shoal disproved / not found

The fields in the Chart Comparison Spreadsheet have been developed from experience learned and feedback received from previous lidar surveys in Alaska, witnessing survey operations on NOAA ship Rainier and from meetings at PHB and UNH. They have been designed for ease of use and to minimize double handling of data and transcription. Continued feedback is welcomed in order to develop these formats in order to achieve further efficiencies in data handling.

#### D.1.3 AWOIS

No AWOIS were assigned to this Task Order.

#### D.1.4 Additional Boatwork Inside Lidar Area

A number of significant soundings have been reviewed that were uncertain. For example, some isolated rocks in kelp were detected that were difficult to correctly classify as either rock

or kelp. In circumstances where it was difficult to correctly classify a particular sounding, a recommendation for investigation by boat for 65 uncertain soundings has been made in the chart comparison spreadsheet. An expanded version of the spreadsheet is included digitally on the USB hard drive. The digital .xls version contains information that may be useful for planning of boat sounding and is readily downloaded into other survey packages.

### D.1.5 Chart Comparison Spreadsheet

				CHART	ED			S	U <b>RVEYED</b>					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
1	D1	1				8.92	4.9	55° 4' 34.7296"	161° 58' 15.8164"	Rk	N	N		Note: Charted -1 drying rock 140m SE confirmed, charted -3 drying rock 240m S confirmed.
2	D2	2	Drying Rk	55° 4' 30"	161° 58' 7"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
3	D3	1				-1.50	-5	55° 4' 16.7074"	161° 57' 59.1872"	Drying Rk	Y	N	Insert	Note: -6 drying rock 100m NNE.
4	D4	1					-0	55° 4' 4.2162"	161° 58' 0.3778"	Drying Rk	Y	N	Insert	Note: Charted -4 drying rock 170m N confirmed.
5	D5	1				-0.56	-2	55° 3' 59.7782"	161° 57' 55.8162"	Drying Rk	Y	N	Insert	
6	D6	1				-1.15	-4	55° 3' 55.1343"	161° 57' 56.2489"	Drying Rk	Y	N	Insert	
7	D7	2	Islet	55° 3' 51"	161° 58' 1"						Y	N	Remove	Not detected by lidar, not observed in downward looking video.
8	D8	1				-10.50	(29)	55° 3' 47.9807"	161° 57' 55.9015"	Islet	N	N	Insert	Note: Islet 45m S.
9	D9	2	3	55° 3' 46"	161° 58' 3"	0.66	cov 2 ft	55° 3' 45.7754"	161° 57' 59.5798"	Drying Rk	Y	N	Insert	See Danger to Navigation Report. Item No.1

				CHART	ED		1	SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
10	D10	2	Drying Rk	55° 3' 43"	161° 57' 49"					Drying Shelf	N	N	Remove	Charted drying rock surveyed as drying shelf.
11	D11	2	Drying Rk	55° 3' 41"	161° 57' 54"	1.04	0.5	55° 3' 39.6368"	161° 57' 57.2098"	Rk	Y	Y	N/A	Possible Rk in kelp.
12	D12	1				-0.39	-1	55° 3' 36.0738"	161° 57' 51.7241"	Drying Rk	Y	N	Insert	Note: 0.6 Rk 35m SW. See Danger to Navigation Report. Item No.2
13	D13	1				-0.81	-3	55° 3' 35.6216"	161° 57' 44.7612"	Drying Rk	Y	N	Insert	
14	D14	1				-1.39	-5	55° 3' 9.6155"	161° 57' 12.4919"	Drying Rk	Y	N	Insert	Note: Charted -4 drying rock 250m N confirmed.
15	D15	2	Drying Rk	55° 3' 3"	161° 57' 14"	1.54	0.8	55° 3' 3.5043"	161° 57' 19.0631"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: Charted -1 drying rock 130m SE confirmed, 1.0 Rk 50m N.
16	D16	1				0.78	cov 2 ft	55° 2' 59.8184"	161° 57' 22.0263"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: 0.5 Rk 70m SE. See Danger to Navigation Report. Item No.3
17	D17	1				-0.94	-3	55° 2' 54.459"	161° 57' 15.5577"	Drying Rk	Y	N	Insert	Note: Many drying rocks in vicinity.
18	D18	1				11.88	6.5	55° 2' 40.9641"	161° 57' 55.481"	Rk	N	N	Insert	Note: 7.3 Rk 250m NE, 7.8 Rk 225m S.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
19	D19	1				10.32	5.6	55° 2' 41.8014"	161° 57' 25.4132"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 5.9 Rk 110m S.
20	D20	2	Islet	55° 2' 44"	161° 57' 4"	-0.69	-2	55° 2' 45.1033"	161° 57' 2.6691"	Drying Rk	N	N	Replace	
21	D21	1				-19.71	(59)	55° 2' 39.5518"	161° 57' 1.6555"	Islet	N	N	Insert	See Danger to Navigation Report. Item No.4
22	D22	1				-0.58	-2	55° 2' 36.6279"	161° 57' 1.2567"	Drying Rk	Y	N	Insert	Note: 2 drying rocks to E.
23	D23	1				11.81	6.4	55° 2' 15.6538"	161° 57' 48.6038"	Rk	N	N	Insert	See Danger to Navigation Report. Item No.5
24	D24	1				1.22	0.6	55° 2' 30.0394"	161° 56' 56.8746"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: Islet 100m ENE, 0.5 Rk 75m SE.
25	D25	1				-7.06	(17)	55° 2' 25.5768"	161° 56' 47.1998"	Islet	Y	N	Insert	Note: -5 drying rock 90m NW.
26	D26	1				0.19	-0	55° 2' 21.1685"	161° 56' 44.47"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp.
27	D27	2	Rk	55° 2' 18"	161° 56' 46"						N	N	Remove	Not detected by lidar.
28	D28	2	Rk	55° 2' 17"	161° 56' 42"	0.42	cov 1 ft	55° 2' 16.0827"	161° 56' 42.4596"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: 2 islets to E.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
29	D29	1				-1.78	-6	55° 2' 8.7269"	161° 56' 34.6817"	Drying Rk	Y	N	Insert	Note: Charted islet 50m NNW confirmed, 0.8 Rk 45m W.
30	D30	1				9.27	5.0	55° 2' 2.6378"	161° 56' 35.3762"	Rk	N	N	Insert	Note: 6.1 Rk 170m S.
31	D31	1				11.10	6.0	55° 1' 56.6505"	161° 56' 45.5695"	Rk	N	N	Insert	Note: 6.8 Rk 105m N.
32	D32	1				10.52	5.7	55° 1' 54.0544"	161° 56' 27.7679"	Rk	N	N	Insert	Note: 6.6 Rk 160m SW. See Danger to Navigation Report. Item No.6
33	D33	1				13.84	7.5	55° 1' 56.6084"	161° 57' 11.9824"	Rk	N	N	Insert	
34	D34	1				14.01	7.6	55° 2' 3.6043"	161° 57' 27.7071"	Rk	N	N	Insert	See Danger to Navigation Report. Item No.7
35	D35	1				15.32	8.3	55° 1' 41.7993"	161° 56' 56.0845"	Rk	N	N	Insert	
36	D36	1				6.14	3.3	55° 2' 1.7399"	161° 56' 18.2582"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 5.8 Rk 100m WSW.
37	D37	2	3 <sup>1</sup> / <sub>2</sub>	55° 2' 4"	161° 56' 6"	1.60	0.9	55° 2' 3.5314"	161° 56' 9.3177"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: Charted -6 drying rock 130m N confirmed, many drying rocks to N, 2.3 Rk 65m SW.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
38	D38	2	Islet	55° 2' 12"	161° 56' 13"	-1.43	-5	55° 2' 11.5576"	161° 56' 12.1384"	Drying Rk	N	N	Replace	Note: -5 drying rock 50m SW.
39	D39	1				13.84	7.5	55° 2' 4.2988"	161° 55' 48.9204"	Rk	N	N	Insert	
40	D40	2	Drying Rk	55° 2' 27"	161° 55' 43"	-4.90	(10)	55° 2' 27.0714"	161° 55' 45.2949"	Islet	Y	N		Note: Many charted drying rocks in vicinity confirmed.
41	D41	2	Islet	55° 2' 31"	161° 55' 46"	-0.49	-2	55° 2' 32.1279"	161° 55' 46.1501"	Drying Rk	Y	N	Replace	
42	D42	2	Islet	55° 2' 45"	161° 55' 47"	-1.91	-6	55° 2' 45.464"	161° 55' 50.4642"	Drying Rk	Y	N	Replace	Note: Islet 95m NW.
43	D43	1				-0.63	-2	55° 2' 50.2026"	161° 55' 50.3926"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: Charted -5 drying rock 180m NNW confirmed, -5 drying rock 50m SW, cov 1 ft drying rock 75m N.
44	D44	1				11.59	6.3	55° 2' 59.569"	161° 55' 44.6571"	Rk	N	N	Insert	
45	D45	1				-5.45	(12)	55° 3' 6.4837"	161° 56' 3.6747"	Islet	Y	N	Insert	Note: cov 2 ft drying rock 55m N.
46	D46	2	Islet	55° 3' 11"	161° 56' 8"						Y	N	Remove	Not detected by lidar, not observed in downward looking video.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
47	D47	1				0.83	cov 2 ft	55° 3' 17.4786"	161° 56' 11.5349"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: Charted cov 1 ft drying rock 150m NW confirmed, 6.0 Rk 200m E.
48	D48	1				9.19	5.0	55° 3' 26.1493"	161° 56' 8.3754"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 4.9 Rk 130m S.
49	D49	1				14.79	8.1	55° 3' 30.1316"	161° 55' 58.7423"	Rk	N	N	Insert	Note: 7.3 Rk 170m W.
50	D50	1				16.57	9.0	55° 3' 40.6584"	161° 55' 51.0785"	Rk	N	N	Insert	
51	D51	1				15.69	8.1	55° 3' 43.2147"	161° 55' 42.0364"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.8
52	D52	2	6 <sup>1</sup> / <sub>4</sub>	55° 3' 60"	161° 56' 19"	7.44	4.0	55° 3' 58.1458"	161° 56' 19.3927"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.9
53	D53	1				14.52	7.9	55° 3' 52.6256"	161° 56' 17.3114"	Rk	N	N	Insert	Note: 7.6 Rk 180m WNW.
54	D54	1				14.76	8.0	55° 4' 0.6483"	161° 55' 47.3623"	Rk	N	N	Insert	See Danger to Navigation Report. Item No.10
55	D55	1				14.11	7.7	55° 3' 42.2295"	161° 56' 30.1083"	Drying Rk	N	N	Insert	
56	D56	1				-1.45	-5	55° 3' 54.9801"	161° 57' 7.5073"	Drying Rk	N	N	Insert	Note: Charted Pinnacle 55m SW confirmed.

				CHART	ED		1	SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
57	D57	1				-1.81	-6	55° 4' 2.2227"	161° 57' 4.4099"	Drying Rk	Y	N	Insert	
58	D58	1				-1.71	-6	55° 4' 12.2993"	161° 57' 5.1186"	Drying Rk	Y	N	Insert	Note: Islet 50m NNW, -5 drying rock 110m SSW.
59	D59	1				12.02	6.6	55° 4' 19.7273"	161° 56' 52.0908"	Rk	Y	Y	N/A	Possible Rk in kelp.
60	D60	1				-3.28	(5)	55° 4' 18.4442"	161° 57' 6.142"	Islet	Y	N	Insert	
61	D61	1				-0.31	-1	55° 4' 25.3196"	161° 57' 5.0382"	Drying Rk	Y	N	Insert	Note: -5 drying rock 80m WNW.
62	D62	1				-0.83	-3	55° 4' 29.5886"	161° 57' 13.2112"	Drying Rk	Y	N	Insert	Note: -1 drying rock 30m S.
63	D63	2	12	55° 3' 10"	161° 54' 40"	14.70	8.0	55° 3' 10.2281"	161° 54' 46.5454"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 8.4 Rk 150m NW, 8.5 Rk 220m NW.
64	D64	1				16.02	8.7	55° 3' 11.5136"	161° 54' 36.1758"	Rk	Y	Y	N/A	Possible Rk in kelp.
65	D65	1				11.38	6.2	55° 3' 8.2133"	161° 54' 30.9069"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.11
66	D66	1				13.04	7.1	55° 1' 45.5371"	161° 56' 10.4378"	Rk	N	N	Insert	Note: 7.4 Rk 250m NE.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
67	D67	2	11	55° 1' 19"	161° 56' 35"	15.28	8.3	55° 1' 16.4328"	161° 56' 31.7074"	Rk	N	N	Replace	
68	D68	1				14.36	7.8	55° 1' 9.5892"	161° 56' 50.2255"	Rk	N	N	Insert	
69	D69	1				17.48	9.5	55° 0' 40.9958"	161° 57' 27.7771"	Rk	N	N	Insert	Note: 9.2 Rk 280m NW.
70	D70	2				8.45	4.6	55° 0' 48.386"	161° 56' 39.7731"	Rk	N	N	Insert	See Danger to Navigation Report. Item No.12
71	D71	1	5 <sup>3</sup> / <sub>4</sub>	55° 0' 46"	161° 56' 33"	9.01	4.9	55° 0' 43.4921"	161° 56' 36.1944"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 5.9 Rk 145m ESE.
72	D72	1				10.93	6.0	55° 0' 37.9543"	161° 56' 31.5655"	Rk	N	N	Insert	
73	D73	1				15.75	8.6	55° 0' 25.3511"	161° 56' 13.4682"	Rk	N	N	Insert	Note: 7.7 Rk 250m N. See Danger to Navigation Report. Item No.13
74	D74	1				17.65	9.6	55° 0' 26.98"	161° 55' 46.197"	Rk	N	N	Insert	Note: 7.2 Rk 220m SW.
75	D75	1				5.70	3.1	55° 0' 26.6301"	161° 54' 31.3123"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 3.2 Rk 140m E. See Danger to Navigation Report. Item No.14
76	D76	1				5.80	3.1	55° 0' 24.5562"	161° 54' 29.227"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 3.4 Rk 110m E.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
77	D77	2	4 <sup>1</sup> / <sub>2</sub>	55° 0' 31"	161° 54' 18"	5.55	3.0	55° 0' 30.148"	161° 54' 22.7222"	Rk	Y	Y	N/A	Possible Rk in kelp.
78	D78	2	Drying Rk	55° 0' 31"	161° 54' 10"					Drying Shelf	N	N	Remove	Not detected by lidar, not observed on downward looking video.
79	D79	1				1.54	0.8	55° 0' 34.7366"	161° 54' 22.7155"	Rk	Y	Y	N/A	Possible Rk in kelp.
80	D80	1				2.26	1.2	55° 0' 37.65"	161° 54' 28.9545"	Rk	Y	N	Insert	See Danger to Navigation Report. Item No.15
81	D81	1				-2.13	-7	55° 0' 48.5554"	161° 54' 44.954"	Drying Rk	N	N	Insert	Note: Charted -5 drying rock 215m ESE confirmed, many drying rocks in vicinity.
82	D82	1				3.31	1.8	55° 0' 45.5454"	161° 54' 53.0166"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.16
83	D83	2	Drying Rk	55° 0' 47"	161° 55' 18"	-3.25	(5)	55° 0' 46.2482"	161° 55' 19.8912"	Islet	N	N	Replace	Note: Charted -8 drying rock 250m W confirmed, -1 drying rock 60m W, cov 2 ft drying rock 50m SSE.
84	D84	1				3.66	2.0	55° 0' 51.5335"	161° 55' 24.6221"	Rk	Y	Y	N/A	Possible Rk in kelp.
85	D85	1				10.01	5.4	55° 0' 43.9078"	161° 55' 51.2048"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 5.0 Rk 165m WNW.
86	D86	1				15.06	8.2	55° 1' 2.2471"	161° 56' 23.0652"	Rk	N	N	Insert	

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
87	D87	1				11.72	6.4	55° 1' 4.8032"	161° 56' 7.4742"	Rk	N	N	Insert	Note: 7.4 Rk 140m NW.
88	D88	2	4 <sup>1</sup> / <sub>2</sub>	55° 1' 4"	161° 55' 55"	9.03	4.9	55° 1' 5.7569"	161° 55' 51.5016"	Rk	N	N	Replace	Note: 5.7 Rk 180m NE.
89	D89	1				8.65	4.7	55° 1' 12.3473"	161° 55' 52.0135"	Rk	N	N	Insert	Note: 6.0 Rk 110m WNW. See Danger to Navigation Report. Item No.17
90	D90	2	4 <sup>1</sup> / <sub>4</sub>	55° 1' 16"	161° 55' 27"	1.50	0.8	55° 1' 15.0587"	161° 55' 28.7486"	Rk	Y	Y	N/A	Possible Rk in kelp Note: 1.0 Rk 40m WSW, 5.8 Rk 180m WSW. See Danger to Navigation Report. Item No.18
91	D91	1					3.5	55° 1' 0.1846"	161° 55' 13.5623"	Rk	N	N	Insert	Note: Charted -2 drying rock 170m NW confirmed.
92	D92	1				2.14	1.1	55° 0' 56.1533"	161° 54' 58.1082"	Rk	N	N	Insert	
93	D93	1				-1.63	-6	55° 1' 8.4612"	161° 54' 52.4861"	Drying Rk	Y	N	Insert	
94	D94	1				8.77	4.8	55° 1' 13.0747"	161° 55' 8.9314"	Rk	N	N	Insert	
95	D95	2	4 <sup>1</sup> / <sub>4</sub>	55° 1' 20"	161° 54' 57"	5.22	2.8	55° 1' 21.558"	161° 54' 53.5404"	Rk	Y	Y	N/A	Possible Rk in kelp.
96	D96	1				-2.32	-8	55° 1' 23.2331"	161° 54' 43.5924"	Drying Rk	Y	N	Insert	Note: -6 drying rock 100m N.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
97	D97	1				8.85	4.8	55° 1' 29.6823"	161° 55' 21.4886"	Rk	N	N	Insert	Note: 4.7 Rk 195m ESE, 5.0 Rk 90m SE.
98	D98	2	8	55° 1' 28"	161° 55' 34"	12.28	6.7	55° 1' 27.9327"	161° 55' 32.6623"	Slope	N	N	Remove	
99	D99	1				7.06	3.8	55° 1' 41.7286"	161° 54' 22.611"	Rk	N	N	Insert	
100	D100	1				8.68	4.7	55° 1' 42.6375"	161° 53' 56.5368"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 3.6 Rk 170m SW.
101	D101	1				-1.82	-6	55° 1' 36.9157"	161° 53' 53.7533"	Drying Rk	Y	N	Insert	Note: -8 drying rock 70m SSW, -0 drying rock 170m SSW, 0.4 Rk 140m WSW.
102	D102	1				0.18	-0	55° 1' 23.5841"	161° 53' 53.8651"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: -0 drying rock 175m NNW.
103	D103	1				-0.16	-1	55° 1' 17.4339"	161° 53' 53.9975"	Drying Rk	Y	N	Insert	
104	D104	1				-1.10	-4	55° 1' 9.4756"	161° 53' 47.2374"	Drying Rk	Y	N	Insert	
105	D105	1				-1.69	-6	55° 1' 6.6951"	161° 53' 33.8274"	Drying Rk	Y	N	Insert	Note: Islet 110m WSW, -1 drying rock 50m S.
106	D106	1				-0.27	-1	55° 1' 5.1294"	161° 53' 21.8764"	Drying Rk	Y	N	Insert	Note: Charted islet 60m E confirmed, islet 35m ESE, -7 drying rock 60m SW.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
107	D107	1				6.92	3.8	55° 1' 9.8031"	161° 53' 9.9203"	Rk	Y	Y	N/A	Possible Rk in kelp.
108	D108	2	Drying Rk	55° 1' 1"	161° 53' 12"	-4.16	(8)	55° 1' 0.6771"	161° 53' 16.4972"	Islet	N	N	Replace	Note: Islet 25m SW, -6 drying rock 80m N.
109	D109	2	8	55° 1' 15"	161° 52' 60"	13.42	7.3	55° 1' 13.357"	161° 52' 58.4587"	Rk	Y	Y	N/A	Possible Rk in kelp.
110	D110	2	Rk	55° 0' 52"	161° 53' 3"	0.57	cov 2 ft	55° 0' 50.1352"	161° 53' 0.9893"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: Many charted rocks in vicinity surveyed as drying shelf.
111	D111	2	Rk	55° 0' 49"	161° 53' 0"	0.57	cov 2 ft	55° 0' 47.3788"	161° 52' 57.1699"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp.
112	D114	2	Rk	55° 0' 45"	161° 53' 2"	-3.52	(6)	55° 0' 44.3953"	161° 53' 4.0869"	Islet	N	N	Replace	
113	D115	1				3.16	1.7	55° 0' 42.3804"	161° 52' 46.6706"	Rk	Y	Y	N/A	Possible Rk in kelp.
114	D116	2	Islet	55° 0' 35"	161° 52' 43"	1.50	0.8	55° 0' 36.3672"	161° 52' 45.3554"	Rk	Y	Y	N/A	Possible Rk in kelp.
115	D118	1				-1.72	-6	55° 0' 31.9348"	161° 52' 40.5431"	Drying Rk	N	N	Insert	Note: Islet 60m WSW, -6 drying rock 40m ENE.
116	D119	2	7	55° 0' 41"	161° 52' 29"	9.24	5	55° 0' 38.907"	161° 52' 29.4756"	Slope	Y	Y	N/A	Possible kelp on slope.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
117	D120	2				5.37	2.9	55° 0' 23.5902"	161° 52' 21.1981"	Rk	Y	Y	N/A	Possible Rk in kelp.
118	D121	2	9	55° 5' 56"	161° 58' 20"	13.07	7.1	55° 5' 56.3955"	161° 58' 20.945"	Slope	N	N	Remove	
119	D122	1				15.24	8.3	55° 5' 56.6262"	161° 57' 54.4188"	Rk	N	N	Insert	
120	D123	1				-1.00	-3	55° 6' 7.2731"	161° 58' 22.5669"	Drying Rk	N	Y	Insert	Note: -5 drying rock 200m NE.
121	D124	1				11.53	6.3	55° 6' 6.0701"	161° 58' 3.9698"	Rk	N	N	Insert	
122	D125	1				14.25	7.8	55° 6' 6.3113"	161° 57' 39.5289"	Rk	N	N	Insert	
123	D126	1				-1.67	-6	55° 6' 14.3362"	161° 57' 47.3653"	Drying Rk	Y	N	Insert	Note: 3 charted drying rocks to W confirmed.
124	D127	2	Drying Rk	<sup>8</sup> 55° 6' 17"	161° 57' 44"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
125	D128	1				-2.33	-8	55° 6' 39.5925"	161° 57' 21.0845"	Drying Rk	Y	N	Insert	
126	D129	2	Drying Rk	<sup>2</sup> 55° 6' 46"	161° 57' 13"	-4.50	-9	55° 6' 46.0455"	161° 57' 13.9969"	Islet	Y	N	Replace	

				CHART	ED			SU	J <b>RVEYED</b>					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
127	D130	1				6.03	3.3	55° 6' 49.222"	161° 57' 2.6174"	Rk	Y	Y	N/A	Possible Rk in kelp.
128	D131	2	Drying Rk	55° 6' 51"	161° 57' 10"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
129	D132	1				-1.45	-5	55° 6' 56.9512"	161° 57' 7.774"	Drying Rk	Y	N	Insert	Note: Charted -6 drying rock 125m S confirmed.
130	D133	2	6	55° 6' 52"	161° 56' 59"	6.60	3.6	55° 6' 54.7122"	161° 56' 59.3536"	Rk	Y	Y	N/A	Possible Rk in kelp.
131	D134	- 1				7.48	4.1	55° 6' 55.5387"	161° 56' 53.0573"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.19
132	D135	2	Drying Rk	55° 7' 4"	161° 57' 9"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
133	D136	2	Drying Rk	55° 7' 8"	161° 57' 7"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
134	D137	1				-2.84	(3)	55° 7' 8.5848"	161° 56' 59.7488"	Islet	N	N	Insert	Note: Islet 25m W, -7 drying rock 25m NE, -4 drying rock 45m N. See Danger to Navigation Report. Item No.20
135	D138	2	3 <sup>1</sup> / <sub>4</sub>	55° 7' 6"	161° 56' 23"	3.46	1.9	55° 7' 7.4602"	161° 56' 23.2017"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.21
136	D139	2	2	55° 7' 5"	161° 54' 37"	0.50	0.2	55° 7' 4.6484"	161° 54' 38.7525"	Slope	Y	Y	N/A	Possible kelp on slope.

Shoal Categories 1-New Shoal Found 2-Charted Shoal Disproved / Not Found

				CHART	ED			SU	J <b>RVEYED</b>					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
137	D140	1				-1.21	-4	55° 6' 47.1553"	161° 54' 54.861"	Drying Rk	Y	N	Insert	Note: -5 drying rock 30m ENE.
138	D141	1				1.93	1.0	55° 6' 29.4008"	161° 55' 21.0524"	Rk	Y	Y	N/A	Possible Rk in kelp.
139	D142	2	Drying Rk	55° 6' 13"	161° 55' 26"						N	N	Remove	Not detected by lidar, not observed on downward looking video.
140	D143				161° 55' 20"	2.84	1.5	55° 6' 11.059"	161° 55' 19.5335"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 2 charted islets to SE confirmed.
141	D144	1				-0.74	-3	55° 6' 4.8228"	161° 54' 54.8624"	Drying Rk	Y	N	Insert	Note: Many drying rocks in vicinity.
142	D145	1				-0.49	-2	55° 6' 1.1478"	161° 54' 41.7576"	Drying Rk	Y	N	Insert	
143	D146	1				-1.04	-4	55° 5' 56.826"	161° 54' 34.0833"	Drying Rk	Y	N	Insert	Note: Islet 45m SE.
144	D147	1				-0.49	-2	55° 5' 45.1987"	161° 54' 20.3709"	Drying Rk	Y	N	Insert	Note: Charted islet 100m W confirmed.
145	D148	2	3 <sup>1</sup> / <sub>2</sub>	55° 5' 44"	161° 54' 14"	1.53	0.8	55° 5' 43.7486"	161° 54' 15.0268"	Slope	Y	N	Remove	
146	D149	1				5.41	2.9	55° 5' 37.4095"	161° 54' 20.3897"	Shoal	Y	N	Insert	Note: Shoal extends 175m NW. See Danger to Navigation Report. Item No.22

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
147	D150	1				-0.68	-2	55° 5' 40.7616"	161° 54' 2.8023"	Drying Rk	Y	N	Insert	
148	D151	1				10.90	5.9	55° 5' 27.5661"	161° 53' 57.0642"	Rk	N	N	Insert	
149	D152	1				-1.15	-4	55° 5' 26.9626"	161° 53' 39.9628"	Drying Rk	Y	N	Insert	Note: Charted -0 drying rock 100m SSE confirmed, islet 35m N.
150	D153	1				-0.67	-2	55° 5' 20.4963"	161° 53' 29.0262"	Drying Rk	Y	N	Insert	Note: Charted -7 drying rock 75m NW confirmed, 0.7 Rk 65m W.
151	D154	2	3 <sup>1</sup> / <sub>4</sub>	55° 5' 14"	161° 53' 23"	3.85	2.1	55° 5' 13.237"	161° 53' 19.2996"	Rk	Y	Y		Possible Rk in kelp. Note: Islet 90m E, 4.0 Rk 80m W.
152	D155	1				7.15	3.9	55° 5' 6.3577"	161° 53' 13.5678"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 2 islets to N, -1 drying rock 100m NE, -3 drying rock 160m E.
153	D156	2	Islet	55° 5' 2"	161° 52' 60"	-2.05	-7	55° 5' 2.3366"	161° 52' 57.3"	Drying Rk	Y	N	Replace	Note: -0 drying rock 50m NE.
154	D157	1				10.14	5.5	55° 4' 53.8398"	161° 52' 56.9078"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 6.4 Rk 140m NW. See Danger to Navigation Report. Item No.23
155	D158	1				12.55	6.8	55° 4' 49.8189"	161° 52' 48.2487"	Rk	Y	Y	N/A	Possible Rk in kelp.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
156	D159	1				8.71	4.7	55° 4' 54.5147"	161° 52' 43.6524"	Rk	Y	Y	N/A	Possible Rk in kelp.
157	D160	1				6.43	3.5	55° 4' 59.7033"	161° 52' 31.4149"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 6.4 Rk 140m SE.
158	D161	1				-1.19	-4	55° 5' 6.2117"	161° 52' 42.8944"	Drying Rk	Y	N	Insert	Note: Islet 65m WNW, many drying rocks in vicinity.
159	D162	1				8.55	4.6	55° 5' 3.5698"	161° 52' 14.9531"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 6.2 Rk 155m ESE. See Danger to Navigation Report. Item No.24
160	D163	2	6	55° 5' 9"	161° 52' 15"	7.36	4.0	55° 5' 8.7839"	161° 52' 11.2542"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 7.1 Rk 135m SE.
161	D164	2	8	55° 5' 2"	161° 51' 52"	6.72	3.7	55° 5' 0.9889"	161° 51' 48.5238"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.25
162	D165	1				13.24	7.2	55° 4' 59.0606"	161° 51' 41.9633"	Rk	Y	Y	N/A	Possible Rk in kelp.
163	D166	1				-1.18	-4	55° 5' 19.3669"	161° 52' 12.699"	Drying Rk	Y	N	Insert	
164	D167	1				12.48	6.8	55° 5' 18.5304"	161° 51' 57.5059"	Rk	N	N	Insert	
165	D168	2	11	55° 5' 22"	161° 51' 44"	14.01	7.6	55° 5' 21.6657"	161° 51' 42.604"	Rk	Y	Y	N/A	Possible Rk in kelp. Note: 8.0 Rk 65m ENE.

Shoal Categories 1-New Shoal Found 2-Charted Shoal Disproved / Not Found

				CHART	ED		1	SU	JRVEYED					
Sequence No	Shoal No	Category	Charted Depth (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
														See Danger to Navigation Report. Item No.26
166	D169	2	Drying Rk	55° 5' 26"	161° 52' 2"	-6.64	(16)	55° 5' 25.823"	161° 51' 58.8854"	Islet	Y	N	Replace	
167	D170	2	Drying Rk	55° 5' 31"	161° 51' 59"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
168	D171	2	13	55° 5' 37"	161° 51' 33"	21.39	11.7	55° 5' 37.3375"	161° 51' 32.5581"	Slope	N	N	Remove	
169	D172	1				16.86	9.2	55° 5' 37.2393"	161° 51' 21.4155"	Rk	N	Y	N/A	Sparse lidar coverage in deep water. See Danger to Navigation Report. Item No.27
170	D173	2	9	55° 5' 40"	161° 51' 53"	8.88	4.8	55° 5' 38.9122"	161° 51' 56.2519"	Slope	Y	N	Remove	
171	D174	1				-0.96	-3	55° 5' 52.2165"	161° 51' 47.6337"	Drying Rk	Y	N	Insert	Note: -4 drying rock 150m W. See Danger to Navigation Report. Item No.28
172	D175	2	Drying Rk	55° 5' 56"	161° 51' 55"					Drying Shelf	Y	N	Remove	Charted drying rock surveyed as drying shelf.
173	D176	2	Drying Rk	55° 5' 58"	161° 51' 46"	-3.61	(6)	55° 5' 56.7219"	161° 51' 48.247"	Islet	Y	N	Replace	
174	D177	1				7.26	3.9	55° 5' 57.0547"	161° 51' 40.5946"	Rk	Y	Y	N/A	Possible Rk in kelp.

				CHART	ED			SU	JRVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
175	D178	1				-0.31	-1	55° 6' 10.2792"	161° 51' 52.937"	Drying Rk	Y	Y	N/A	Possible drying rock in kelp. Note: Many drying rocks in vicinity.
176	D179	1				-0.52	-2	55° 6' 15.671"	161° 52' 6.7039"	Drying Rk	Y	N	Insert	
177	D180	1				4.40	2.4	55° 6' 29.5697"	161° 52' 24.1648"	Rk	Y	Y	N/A	Possible Rk in kelp. See Danger to Navigation Report. Item No.29
178	D181	1				-2.75	(3)	55° 2' 34.7168"	161° 55' 47.4201"	Islet	Y	N	Insert	
179	D182	1				-10.56	(29)	55° 2' 40.888"	161° 55' 49.1036"	Islet	Y	N	Insert	
180	D183	2	5 <sup>1</sup> / <sub>4</sub>	55° 4' 13"	161° 56' 56"	6.94	3.8	55° 4' 12.9992"	161° 56' 59.3736"	Slope	Y	N	Remove	
181	D184	1				2.92	1.6	55° 4' 46.2614"	161° 57' 51.0803"	Rk	Y	Y	N/A	Possible Rk in kelp.
182	D185	2	1 <sup>1</sup> / <sub>2</sub>	55° 0' 50"	161° 55' 1"	1.96	1.0	55° 0' 46.8666"	161° 55' 1.7712"	Rk	Y	Y	N/A	Possible Rk in kelp.
183	D186	1				19.51	10.6	55° 7' 12.2583"	161° 55' 9.5142"	Rk	N	N	Insert	
184	D187	1				1.70	0.9	55° 6' 29.6767"	161° 55' 30.3063"	Rk	Y	Y	N/A	Possible Rk in kelp.

				CHART	ED			SU	URVEYED					
Sequence No	Shoal No	Category	<b>Charted Depth</b> (fms)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Surveyed Depth (meters)	Surveyed Depth (decimal fms / whole feet / (feet) above MHW)	NAD 83 Latitude N (DMS)	NAD 83 Longitude W (DMS)	Type of Feature	Kelp Area	Further Examination Recommended	Charting Recommendation	Remarks All items covered by 4x4m laser spot spacing at 200% lidar coverage.
185	D188	1				-0.03	-0	55° 6' 8.0217"	161° 55' 9.0246"	Drying Rk	Y	N	Insert	
186	D189	1				-4.23	(8)	55° 6' 25.8111"	161° 53' 14.9336"	Islet	Y	N	Insert	

## D.1.6 Features Requiring Investigation

During the validation, checking and approving stages of the data processing a spreadsheet of the features requiring investigation was compiled. The list from this spreadsheet was then compared to the chart comparisons and DtoNs reported and their significance evaluated. Sixty additional soundings were identified for further investigation and are presented in the following table. The full spreadsheet is also provided in Excel format with the digital data (H11439\_V2\_Features\_Inv.xls). Where these areas correlate with a feature listed in the Chart Comparison Spreadsheet, a reference has been made to the shoal number. The kelp areas are described under five general sections:

- 1. Kelp area observed in video, no detection by system deep water.
- 2. Kelp area observed in video, no detection by system within data coverage.
- 3. Kelp area, some detections, least depth found.
- 4. Kelp area, some detections, least depth NOT found.
- 5. No evidence of kelp but poor coverage least depth NOT found.

All reported features are considered significant for further investigation during boat work and are reported as possible hazards when conducting survey work by boat.

During the approval of the smooth sheet a number of possible small objects were identified on the seabed and these possible features have been assigned the text "Rk" in the category column. These possible features may or may not be kelp related but analysis of the waveform indicates the possibility of a small object. During the production of the smooth sheet the digital mosaic was reviewed against the surveyed and charted drying features. Any drying features have been assigned the text "DR" in the category column for investigation.

Sequence No.	Feature No.	Kelp Description Category	NAD 83 Latitude (N) (deg min sec.dd)	NAD 83 Longitude (W) (deg min sec.dd)	Dimension (m)	Description	Significance and Chart Comparison Relationship
1	FD01	4	55° 03' 39.64"	161° 57' 57.23"	10x10	area. Many kelp features	220m SW of Inner Iliasik Is coastline, 150m NW of drying rock. See D11
2	FD02	4	55° 07' 08.88"	161° 56' 37.59"	15x20	· · · · · ·	550m S of Moss Cape, 370m E of red beacon.
3	FD03	4	55° 07' 05.68"	161° 56' 38.65"	20x20	Possible Rk in kelp. Least depth not found. Many kelp features in vicinity.	650m S of Moss Cape.
4	FD04	4	55° 07' 03.84"	161° 56' 38.51"	60x80	Possible Rk in large kelp area, Least depth not found.	700m S of Moss Cape.

Sequence No.	Feature No.	Kelp Description Category	NAD 83 Latitude (N) (deg min sec.dd)	NAD 83 Longitude (W) (deg min sec.dd)	Dimension (m)	Description	Significance and Chart Comparison Relationship
5	FD05	4	55° 07' 09.59"	161° 56' 22.84"	20x30	Possible Rk in kelp. On N edge of large kelp area.Least depth not found.	550m SE of Moss Cape, 130m NW of red beacon.
6	FD06	4	55° 04' 19.74"	161° 56' 52.12"	50x20	Possible Rk in kelp, least depth not found.	275m E of Inner Iliasik Is coastline. See D59
7	FD07	4	55° 01' 59.95"	161° 56' 44.21"	10x20	Possible Rk in large kelp area, least depth not found.	520m SW of s headland of Inner Iliasik Is, 330m SSW of Islet.
8	FD08	DR	55° 02' 21.20"	161° 56' 44.93"	20x10	Possible drying rock in kelp. Many kelp features in vicinity.	150m SW of Inner Iliasik Is coastline, 145m S of Islet. Note: D26 10m E
9	FD09	4	55° 06' 11.07"	161° 55' 21.08"	60x50	Possible Rk in large kelp area, least depth not found.	320m W of Goloi Is coastline, 110m NW of Islet. Note: D143 30m E
10	FD10	4	55° 03' 21.49"	161° 56' 07.63	30x50	Possible Rk in kelp, least depth not found. Many kelp features in vicinity.	310m NE of Inner Iliasik Is, 180m E of drying rock.
11	FD11	4	55° 06' 04.27	161° 55' 14.38"	50x50	Possible Rk in large kelp area, least depth not found.	350m SW of Goloi Is coastline, 115m S of Islets.
12	FD12	4	55° 02' 01.76"	161° 56' 10.93"	15x15	Possible Rk in kelp, least depth not found.	420m S of Inner Iliasik Is coastline, 130m S of drying rock.
13	FD13	4	55° 03' 43.21"	161° 55' 42.04"	20x25	Possible Rk in kelp, least depth not found.	1100m NE of Inner Iliasik Is coastline. See D51
14	FD14	4	55° 02' 56.73"	161° 55'50.32"	10x10	Possible Rk in kelp. On NE edge of large kelp area, many kelp features in vicinity.	170m NE of Inner Iliasik Is coastline, 90m NE of drying rock.
15	FD15	4	55° 00' 43.50"	161° 56' 36. 18"	15x15	Possible Rk in kelp, least depth not found.	2750m SW of N tip of Outer Iliasik Is. See D71.
16	FD16	4	55° 02' 40.00"	161° 55' 42.05"	20x15	Possible Rk in kelp, least depth not found.	190m E of Inner Iliasik Is coastline, 125m E of Islet.
17	FD17	4	55° 05' 38.03"	161° 54' 21.33"	25x40	Possible Rk in kelp, over	270m S of mid SW coastline of Goloi Is, 240m S of islet and drying rock. Note: D149 25m SW
18	FD18	4	55° 01' 14.44"	161° 55' 30.62"	30x30	Possible Rk in kelp, least depth not found.	740m W of Outer Iliasik Is coastline. See D90.
19	FD19	4	55° 03' 10.23"	161° 54' 46.53"	30x30	Possible Rk in kelp, least depth not found.	1400m NE of Inner Iliasik Is coastline. See D63
20	FD20	4	55° 03' 08.85"	161° 54' 32.50"	30x130	Possible Rk in kelp over shoal extending 130m SE. Least depth not found	1600m NE of Inner Iliasik Is coastline. Note: D65 35m SE
21	FD21	4	55° 01' 41.43"	161° 54' 20.36"	10x10	Possible Rk in kelp, least depth not found.	240m N of N tip of Outer Iliasik Is. See D99

Sequence No.	Feature No.	Kelp Description Category	NAD 83 Latitude (N) (deg min sec.dd)	NAD 83 Longitude (W) (deg min sec.dd)	Dimension (m)	Description	Significance and Chart Comparison Relationship
22	FD22	4	55° 06' 29.56"	161° 52' 24.15"	10x10	Possible Rk in kelp, many kelp features in vicinity.	320m E of NE headland of Goloi Is. See D180
23	FD23	4	55° 04' 49.82"	161° 52' 48.24"	45x35	Possible Rk in kelp, on S edge of large kelp area.	490m SSE of S headland of Goloi Is. See D158
24	FD24	4	55° 04' 52.93"	161° 52' 41.19"	25x25	Possible Rk in kelp, least depth not found. Many kelp features in vicinity.	425m SSE of S headland of Goloi Is. Note: D159 70m NW.
25	FD25	4	55° 01' 09.81"	161° 53' 09.91"	35x50	Possible Rk in large kelp area, least depth not found. Many kelp features in vicinity.	360m NE of W central coast of Outer Iliasik Is, 225m NE of islet. See D107.
26	FD26	4	55° 05' 21.66"	161° 51' 42.60"	100x50	Possible Rk over large kelpy shoal, extending 100m ENE. Least depth not found.	300m E of mid SE headland of Goloi Is. See D168.
27	FD27	4	55° 05' 01.00"	161° 51' 48.51"	50x50	Possible Rk over large kelpy shoal, least depth not found.	640m SSE of mid SE headland of Goloi Is. See D164
28	FD28	4	55° 01' 13.35"	161° 52' 58.45"	20x35	Possible Rk in kelp, least depth not found.	550m NE of W central coast of Outer Iliasik Is, 450m NE of islet. See D109.
29	FD29	4	55° 04' 59.25"	161° 51' 42.07"	30x30	Possible Rk in kelp, least depth not found.	765m SSE of mid SE headland of Goloi Is. Note: D165, 10m SE.
30	FD30	4	55° 04' 59.25"	161° 51' 42.07"	20x20	Possible Rk in kelp, least depth not found.	600m E of Outer Iliasik Is coastline.
31	FD31	4	55° 02' 50.94"	161° 55' 44.54"	10x10	Possible Rk in kelp.	200m E of Inner Iliasik Is coastline, 100m E of drying rock.
32	FD32	4	55° 01' 42.65"	161° 53' 56.56"	30x30	Possible Rk in kelp, least depth not found.	430m NE of N tip of Outer Iliasik Is. See D100.
33	FD33	4	55° 06' 49.21"	161° 57' 02.62"	15x15	Rk in kelp, least depth not found.	1210m SSW of Moss Cape. See D130.
34	FD34	Rk	55° 07' 06.95"	161° 54' 41.34"	20x20	Possible Rk in kelp.	170m NW of N headland of Goloi Is.
35	FD35	4	55° 04' 59.70"	161° 52' 31.41"	25x25	Possible Rk on S edge of large kelp area. Many kelp features in vicinity.	290m SE of Goloi Is coastline, 280m SE of drying rock. See D160
36	FD36	4	55° 06' 17.10"	161° 55' 19.32"	30x50	Possible Rk in kelp on NW edge of extending kelp area.	290m W of Goloi Is coastline, 260m N of Islet.
37	FD37	4	55° 00' 43.62"	161° 52' 46.86"	15x15	Possible Rk in kelp, least depth not found. Many kelp features in vicinity.	320m W of Outer Iliasik Is coastline, 220m SE of drying rock. Note: 25m N of D115.
38	FD38	4	55° 01' 39.54"	161° 54'04.73"	15x25	Possible Rk in kelp, least depth not found.	300m NE of N tip of Outer Iliasik Is.

Sequence No.	Feature No.	Kelp Description Category	NAD 83 Latitude (N) (deg min sec.dd)	NAD 83 Longitude (W) (deg min sec.dd)	Dimension (m)	Description	Significance and Chart Comparison Relationship
39	FD39	4	55° 01' 54.07"	161° 56' 27.78"	30x30	Possible Rk in kelp, least depth not found.	620m S of S headland of Inner Iliasik Is. See D32
40	FD40	4	55° 05' 08.79"	161° 52' 11.24"	80 x 80	Possible Rk on E edge of large kelp area. Many kelp features in vicinity.	380m SE of Goloi Is coastline. See D163
41	FD41	4	55° 05' 57.05"	161° 51' 40.61"	10x10	Possible Rk in large kelp area, least depth not found.	90m SE of E headland of Goloi Is, 140m E of Islet. See D177
42	FD42	4	55° 04' 53.86"	161° 52' 56.88	20x20	Possible Rk in kelp.	330m S of S headland of Goloi Is, 260m S of drying rock. See D157
43	FD43	4	55° 02' 08.41"	161° 56' 02.29"	10x10	Possible Rk in kelp, 40m E of large kelp area.	300m SE of Inner Iliasik Is coastline, 110m E of drying rock.
44	FD44	4	55° 02' 03.43"	161° 56' 03.39"	10x10	Possible Rk in kelp, SE of large kelp area with many kelp features.	400m SE of Inner Iliasik Is coastline, 130m SE of drying rock.
45	FD45	4	55° 03' 01.62"	161° 54' 12.87"	15x15	Possible Rk in kelp, least depth not found.	1850m ENE of Inner Iliasik Is coastline.
46	FD46	4	55° 03' 27.16"	161° 56' 15.43"	20x20		320m NE of Inner Iliasik Is, 200m N of drying rock.
47	FD47	4	55° 00' 23.58"	161° 52' 21.20"	25x20	Possible Rk in kelp, many kelp features in vicinity.	350m W of Outer Iiiasik Is. See D120.
48	FD48	4	55° 01' 00.47"	161° 53' 07.78"	20x20	Possible Rk in kelp, least depth not found.	190m W of Outer Iiiasik Is coastline, 150m W of islet. Note: 150m E of D108.
49	FD49	DR	55° 02' 16.08"	161° 56' 42.46"	10x10	Possible drying rock in kelp, many kelp features in vicinity.	150m SW of Inner Iliasik Is coastline, 95m SW of Islet. See D28
50	FD50	Rk	55° 05' 54.39"	161° 57' 54.17"	10x10	Possible Rk at seaward extent of shoal.	650m SE of mainland coastline.
51	FD51	DR	55° 04' 27.02"	161° 58' 13.54"	25x25	Possible drying rock in kelp, least depth not found.	280m W of Iliasik Is coastline. At seaward extent of rock ledge
52	FD52	Rk	55° 02' 06.71"	161° 56' 56.54"	40x20	Possible Rk in sparse coverage. Least depth not found.	530m SE of S headland of Inner Iliasik Is, 165m WSW of Islet.
53	FD53	4	55° 00' 26.64"	161° 54' 31.34"	10x10	Possible Rk in kelp.	590m W of Outer Iliasik Is coastline. See D75.
54	FD54	4	55° 00' 32.36"	161° 54' 25.89"	15x20	Possible Rk in kelp	410m W of Outer Iliasik Is coastline. Note: 90m NW of D77.
55	FD55	Rk	55° 05' 37.24"	161° 51' 21.42"	50x50	Possible Rk on E edge of data coverage.	600m E of mid SE headland of Goloi Is. See D172

Sequence No.	Feature No.	Kelp Description Category	NAD 83 Latitude (N) (deg min sec.dd)	NAD 83 Longitude (W) (deg min sec.dd)	Dimension (m)	Description	Significance and Chart Comparison Relationship
56	FD56	DR	55° 00' 32.87"	161° 52' 37.58"	10x10	Possible drying rock observed on video.	200 W of Outer Iliasik Is, 50m NE of drying rock. Note: 50m NE of D116.
57	FD57	4	55° 00' 32.87"	161° 52' 37.58"	20x15	Possible Rk in kelp, no depths found.	400m W of Outer Iliasik Is coastline. See D77.
58	FD58	DR	55° 02' 42.04"	161° 57' 08.89"	30x30	Possible drying rock observed on video in large kelp area.	250m W of Inner Iliasik Is coastline 150m NW of islet, D21.
59	FD59	DR	55° 02' 44.35"	161° 57' 09.62"	30x30	Possible drying rock observed on video in large kelp area.	210m W of Inner Iliasik Is coastline 125m W of drying rock, D20.
60	FD60	4	55° 06' 55.52"	161° 56' 53.04"	10x10	Possible Rk in kelp located on outer NE edge of shoal.	300m E of mainland coastline, 150m SE of drying rock. See D134

## D.1.7 Aids To Navigation

During the survey two navigational aides were detected by lidar for H11439. These navigational aides have been identified as follows:

Number	Name	Latitude (N)	Longitude (W)
27150	Moss Cape Lighted Buoy 4	55° 07' 07"	161° 56' 17"
27160	Iliasik Passage Lighted Buoy 5	55° 01' 45"	161° 55' 19"

Number	Line	Easting	Northing	Height
27150	538.0.1	312 638	6 111 938	-6.30
		312 642	6 111 937	-5.89
		312 640	6 111 933	observed / not detected
	1203.0.1	312 643	6 111 930	-6.1
		312 646	6 111 932	-5.8
	537.0.1	312 634	6 111 925	-5.1
		312 637	6 111 924	-5.1
		312 635	6 111 929	observed / not detected
		312 639	6 111 928	-5.2
	1541.0.1	312 646	6 111 914	-4.7
	Mean	312 640	6 111 929	

Navigational aide 27150 was detected a number of times on four different lines and 27160 was detected on two different lines.

## Mean position: 55° 07' 06.88" N, 161° 56' 17.00" W

Number	Line	Easting	Northing	Height
27160	1323.0.1	313 230	6 101 946	-4.0
		313 227	6 101 944	-3.1
	571.0.1	313 232	6 101 946	-5.7
	Mean	313 230	6 101 945	

### Mean position: 55° 01' 45.12" N, 161° 55' 20.18" W

It should be noted that the buoys were not necessarily surveyed on both the flood and ebb streams, no charting recommendations have been made.

### D.1.8 Recommended Overlap With Lidar Data

The smooth sheet H11439 consists of a part of the Alaska Peninsula south of Moss Cape, Goloi Island, Inner Iliasik Island and the northern part of Outer Iliasik Island.

The recommended overlap by surface vessel is described below. A polygon is also included in the MicroStation file to illustrate the following recommendation and should be consulted when reading the following notes. The polygon is provided as a .dgn file (H11439\_v1\_Overlap.pzip) and is provided with the digital data in MicroStation version 7 format. Note: all positions quoted are in NAD 83.

The recommended overlap by surface vessels for sheet H11439 is seaward of the poly-lines described as follows:

## a) Poly-line H11439\_1

This poly-line covers the northwestern part of the smooth sheet consisting of a part of the Alaskan Peninsula south of Moss Cape. Good coverage exists to 8-10 fathoms with sparse coverage to 13 fathoms. The recommended overlap is depicted by the poly-line. In addition, local areas of sparse coverage exist as follows:

- Kelp area around 1.9 Rk at 55° 07.1' N, 161° 56.4' W
- Coastal kelp between the 0fm and 2fm curves from 55°07.2' N, 161° 58.4' W to 55° 06.1' N, 161° 58.4' W

## b) Poly-line H11439\_2

This poly-line covers Goloi Island. Coastal kelp is present around the majority of the island between the 0fm and 2fm curve. A large area of kelp exists at the southeast of the island. In general, good coverage exists to 8-10 fathoms. At the southeast tip of the island good coverage exists to 10-12 fathoms with sparse coverage to 11-13 fathoms. The recommended overlap is depicted by the poly-line. In addition, local areas of sparse coverage exists as follows:

- Shallowest Limit of Hydrography around spit at 55° 06.55' N, 161° 52.8' W
- Coastal kelp between the 0fm and 2fm curve from 55° 06.8' N, 161° 54.8' W to 55° 06.8' N, 161° 54.0' W
- Sparse coastal kelp between the 0fm and 2fm curve from 55° 06.3' N, 161° 55.1' W to 55° 05.1' N, 161° 53.0' W
- Patches of coastal kelp between the 0fm and 3fm curve from 55° 05.3' N, 161° 52.0' W to 55° 06.55' N, 161° 52.8' W
- Large kelp area at 55° 05.1' N, 161° 52.5' W
- Kelp area at 55° 05.0' N, 161° 51.8' W
- Kelp area at 55° 04.9' N, 161° 52.7' W
- Kelp area on ridge at 55° 05.65' N, 161° 54.35' W
- Kelp area at 55° 06.1' N, 161° 55.4' W
- Kelp area at 55° 06.2' N, 161° 55.3' W
- Kelp area around 1.0 Rk at 55° 06.5' N, 161° 55.4 W
- Shallowest Limit of Hydrography around sand spit at 55° 06.6' N, 161° 55.5' W

Kelp area exists to seaward of the poly-line at 55° 06.5' N, 161° 55.6' W

## c) Poly-line H11439\_3

This poly-line covers a shoal ridge approximately 1000m northeast of Inner Iliasik Island. In general, good coverage exists to 12 fathoms with sparse data to 15 fathoms. The

recommended overlap is depicted by the poly-line. In addition, local areas of sparse coverage exists as follows:

- Around 8.5 Rk at 55° 03.3' N, 161° 54.9' W
- At 55° 03.1' N, 161° 54.4' W

## d) Poly-line H11439\_4

This poly-line is off the southwest coast of Goloi Island and is a small area in the northeast corner of the smooth sheet. The recommended overlap is depicted by the poly-line and extends to the northwest into H11436 and to the southeast into H11437.

## e) Poly-line H11439\_5

This poly-line covers Inner Iliasik Island and the northern portion of Outer Iliasik Island. In general good coverage exists around Inner Iliasik Island to 8-9 fathoms with sparse data to 12-14 fathoms. Good coverage exists in the channel between the two islands to 12 fathoms and sparse data to 14-15 fathoms. Around the northern part of Outer Iliasik Island, good coverage exists to 12 fathoms with sparse data to 14 fathoms off the west coast and off the east coast there is good coverage to 10 fathoms and sparse data to 13 fathoms. The recommended overlap is depicted by the poly-line. In addition, local areas of sparse coverage exists as follows:

- Around 6.2 Rk at 55° 00.7' N, 161° 52.5' W
- Around 9.7 Rk at 55° 00.95' N, 161° 52.7' W
- Deep area at 55° 01.1' N, 161° 52.8' W
- Kelp area at 55° 01.2' N, 161° 53.1' W
- Coastal kelp between the 0fm and 3fm curve from 55° 00.85' N, 161° 53.2' W to 55° 00.55' N, 161° 52.7' W
- Coastal kelp between the 0fm and 3fm curve from 55° 01.55' N, 161° 53.9' W to 55° 01.1' N, 161° 53.4' W
- Kelp area at 55° 01.4' N, 161° 54.9' W
- Kelp area at 55° 01.25' N, 161° 55.5' W
- Kelp area at 55° 01.6' N, 161° 55.1' W
- Kelp area around 2.0 Rk at 55° 00.85' N, 161° 55.4' W
- Deep area at 55° 01.7' N, 161° 55.5' W
- Kelp area around 4.7 Rk at 55° 01.2' N, 161° 55.9' W
- Within the 2fm curve around islet and 2 drying rocks at 55° 00.85' N, 161° 55.4' W
- Coastal kelp between the 0fm and 3fm curve from 55° 03.1' N, 161° 57.3' W to 55° 02.5' N, 161° 56.9' W
- Kelp area at 55° 03.4' N, 161° 57.2' W
- Coastal kelp between the 0fm and 2fm curve from 55° 03.5' N, 161° 56.7' W to 55° 02.4' N, 161° 55.8' W
- Kelp area at 55° 03.55' N, 161° 56.9' W
- At 55° 03.7' N, 161° 56.5' W
- Kelp area at 55° 03.95' N, 161° 56.3' W

- Kelp area at 55° 04.3' N, 161° 56.8' W
- Coastal kelp between the 0fm and 1fm curve from 55° 04.8' N, 161° 58.2' W to 55° 04.4' N, 161° 58.2' W
- Kelp area at 55° 04.75' N, 161° 57.9' W
- Along the western side of the sand ridge at 55° 04.9' N, 161° 58.4' W
- Coastal kelp between the 0fm and 3fm curve from 55° 04.7' N, 161° 57.8' W to 55° 04.85' N, 161° 57.1' W
- Coastal kelp between the 0fm and 5fm curve from 55° 03.8' N, 161° 58.0' W to 55° 03.6' N, 161° 57.7' W

Two shoal areas exist to seaward of the poly-line at

- 55° 04.0' N, 161° 55.8' W
- 55° 02.5' N, 161° 54.5' W

f) Poly-line H11439\_6

This poly-line is a shoal area at 55° 02.0' N, 161° 57.8' W lying approximately 1000m off the west coast of the southern part of Inner Iliasik Island. There are a number of shoal areas which exist to seaward of this poly-line. The recommended overlap is depicted by the poly-line.

# E. APPROVAL SHEET

# LETTER OF APPROVAL – OPR-P184-KRL-05

This report and the accompanying smooth sheets are respectfully submitted.

Field operations contributing to the accomplishment of this survey were conducted under my direct supervision with frequent personal checks of progress and adequacy. This report and the accompanying smooth sheets have been closely reviewed and are considered complete and adequate as per the Statement of Work.

Report

Submission Date

Descriptive Report – H11439

December 12, 2006

For D.J. Starte

Mark Sinclair Hydrographer Tenix LADS Incorporated

Date 12/12/2006

## **Revisions and Corrections Compiled During Office Processing and Certification**

<sup>1</sup> The LIDAR survey referenced in this Descriptive Report has been applied to the multibeam surveys it junctions with. No stand-alone LIDAR information was compiled to the HCell. For information concerning the compilation of LIDAR features and soundings see the Descriptive Reports for multibeam surveys H11902, H11905, H11931, and H11932. LIDAR does not meet IHO object detection requirements. LIDAR was not used to supersede shoaler charted soundings or to disprove charted features.

The Data Acquisition and Processing Report and Horizontal and Vertical Control Report have been filed with the project records.

# **APPENDIX I – DANGERS TO NAVIGATION**

## **DTONS Submitted to PHB**

### **1.1.1. Danger to Navigation Report**

Hydrographic Survey Registry Number: H11439

State:	Alaska
Locality:	Pavlof Islands and Vicinity, AK
Sub-locality:	Outer Iliasik Island to Goloi Island
Project Number:	OPR-P184-KRL-05
Survey Dates:	April - August 2005

Depths are in decimal fathoms and reduced to Mean Lower Low Water using final verified tides. Positions are based on the NAD83 horizontal datum.

<b>Charts Affected</b>						
Number Version Date Scale						
16549	$15^{\text{th}}$ Ed.	July 2003	1:80,000			

The following items were found during hydrographic survey operations:

No.	Feature	Depth	Latitude (N)	Longitude (W)	Comments
1	Drying Rk	cov 2ft	55° 03' 45.77"	161° 57' 59.60"	
2	Drying Rk	-1	55° 03' 36.09"	161° 57' 51.72"	
3	Drying Rk in kelp	cov 2ft	55° 02' 59.82"	161° 57' 22.04"	Recommended further investigation by boat
4	Islet	(59)	55° 02' 39.56"	161° 57' 01.66"	
5	Rk	6.4	55° 02' 15.67"	161° 57' 48.60"	
6	Rk	5.7	55° 01' 54.07"	161° 56' 27.78"	
7	Rk	7.6	55° 02' 03.62"	161° 57' 27.70"	
8	Rk in kelp	8.1	55° 03' 43.21"	161° 55' 42.04"	Recommended further investigation by boat

No.	Feature	Depth	Latitude (N)	Longitude (W)	Comments
9	Rk in kelp	4.0	55° 03' 58.13"	161° 56' 19.40"	Recommended further investigation by boat
10	Rk	8.0	55° 04' 00.65"	161° 55' 47.38"	
11	Rk in kelp	6.2	55° 03' 08.21"	161° 54' 30.93"	Recommended further investigation by boat
12	Rk	4.6	55° 00' 48.40"	161° 56' 39.75"	
13	Rk	8.6	55° 00' 25.35"	161° 56' 13.45"	
14	Rk in kelp	3.1	55° 00' 26.64"	161° 54' 31.34"	Recommended further investigation by boat
15	Rk	1.2	55° 00' 37.66"	161° 54' 28.98"	
16	Rk in kelp	1.8	55° 00' 45.53"	161° 54' 53.04"	Recommended further investigation by boat
17	Rk	4.7	55° 01' 12.34"	161° 55' 51.99"	
18	8 Rk in kelp 0		55° 01' 15.07"	161° 55' 28.76"	Recommended further investigation by boat
19	Rk in kelp	4.1	55° 06' 55.52"	161° 56' 53.04"	Recommended further investigation by boat
20	Islet	(3)	55° 07' 08.60"	161° 56' 59.76"	
21	Rk in kelp	1.9	55° 07' 07.44"	161° 56' 23.19"	Recommended further investigation by boat
22	Rk on ridge	2.9	55° 05' 37.41"	161° 54' 20.38"	
23	Rk in kelp	5.5	55° 04' 53.86"	161° 52' 56.88"	Recommended further investigation by boat
24	Rk in kelp	4.6	55° 05' 03.59"	161° 52' 14.93"	Recommended further investigation by boat
25	Rk in kelp	3.7	55° 05' 01.00"	161° 51' 48.51"	Recommended further investigation by boat
26	Rk in kelp	7.6	55° 05' 21.66"	161° 51' 42.60"	Recommended further investigation by boat
27	Rk in deep water	9.2	55° 05' 37.24"	161° 51' 21.42"	Recommended further investigation by boat
28	Drying Rk	-3	55° 05' 52.23"	161° 51' 47.66"	
29	Rk in kelp	2.4	55° 06' 26.56"	161° 52' 24.15"	Recommended further investigation by boat

**COMMENTS:** Final verified tides have been applied from the Dolgoi Harbor tide gauge (945-9758). The DTONS were found using LIDAR.

Questions concerning this report should be directed to Darren Stephenson in the Tenix LADS Inc. office in Biloxi MS at (228) 594-6800.

## **DTONS Submitted to MCD**

### 1.1.2. Danger to Navigation Report

#### Hydrographic Survey Registry Number: H11439

Survey Title: State: Alaska Locality: Pavlof Islands and vicinity Sub-locality: Outer Iliasik Island to Goloi Island

Project Number: OPR-P184-KRL-05

Survey Dates: April - August 2005

Depths are in fathoms and feet reduced to Mean Lower Low Water using final verified tides. Drying heights are in whole feet. Positions are based on the NAD83 horizontal datum.

#### CHARTS AFFECTED:

<u>Chart</u>	Scale	Edition	Date
16549	1:80,000	15th	07/26/03
16540	1:300,000	12th	Jan. / 05

#### DANGERS TO NAVIGATION:

	<u>Depth (fm<sub>ft</sub>)</u>		
<b>Feature</b>	<u>Height (ft</u> )	Latitude (N)	Longitude (W)
Rk	( <u>1</u> )	55° 03' 36.09"	161° 57' 51.72"
Rk	cov 2ft	55° 02' 59.82"	161° 57' 22.04
Rk	6 <sub>2</sub>	55° 02' 15.67"	161 <sup>°</sup> 57' 48.60"
Rk	54	55° 01' 54.07"	161° 56' 27.78"
Rk	7 <sub>3</sub>	55° 02' 03.62"	161° 57' 27.70"
Rk	8	55° 03' 43.21"	161° 55' 42.04"
Rk	4	55° 03' 58.13"	161° 56' 19.40"
Rk	8	55° 04' 00.65"	161° 55' 47.38"
Rk	6 <sub>1</sub>	55° 03' 08.21"	161° 54' 30.93"
Rk	4 <sub>3</sub>	55° 00' 48.40"	161° 56' 39.75"
Rk	3	55° 00' 26.64"	161° 54' 31.34"
Rk	1 <sub>1</sub>	55° 00' 37.66"	161° 54' 28.98"
Rk	1 <sub>5</sub>	55° 00' 45.53"	161° 54' 53.04"
Rk	44	55° 01' 12.34"	161° 55' 51.99"
I XIX	<b>+</b> 4	55 01 12.54	101 00 01.00

0	55 <sup>0</sup> 01' 15 07"	161° 55' 28.76"
$0_5$	55 01 15.07	101 55 26.70
4	55° 06' 55.52"	161° 56' 53.04"
(3)	55° 07' 08.60"	161° 56' 59.76"
1 <sub>5</sub>	55° 07' 07.44"	161° 56' 23.19"
<b>2</b> <sub>5</sub>	55° 05' 37.41"	161° 54' 20.38"
6 <sub>5</sub>	55° 04' 49.82"	161° 52' 48.25"
4	55° 05' 08.78"	161° 52' 11.25"
34	55° 05' 01.00"	161° 51' 48.51"
<b>7</b> <sub>3</sub>	55° 05' 21.66"	161° 51' 42.60"
9 <sub>1</sub>	55° 05' 37.24"	161° 51' 21.42"
( <u>3</u> )	55° 05' 52.23"	161° 51' 47.66"
22	55° 06' 29.56"	161° 52' 24.15"
	(3) $1_5$ $2_5$ $6_5$ 4 $3_4$ $7_3$ $9_1$ ( <u>3</u> )	4 $55^{\circ} \ 06' \ 55.52"$ (3) $55^{\circ} \ 07' \ 08.60"$ $1_5$ $55^{\circ} \ 07' \ 07.44"$ $2_5$ $55^{\circ} \ 05' \ 37.41"$ $6_5$ $55^{\circ} \ 04' \ 49.82"$ 4 $55^{\circ} \ 05' \ 08.78"$ $3_4$ $55^{\circ} \ 05' \ 01.00"$ $7_3$ $55^{\circ} \ 05' \ 37.24"$ $9_1$ $55^{\circ} \ 05' \ 52.23"$

**COMMENTS:** All features were found by Tenix LADS (LIDAR) and reviewed by PHB. Final verified tides have been applied from the Dolgoi Harbor tide gauge (945-9758).

Questions concerning this report should be directed to the Chief, Pacific Hydrographic Branch at (206) 526 6835

# **APPENDIX II – LIST OF GEOGRAPHIC NAMES**

Geographical names were not checked during the survey, and no amendments are proposed.


# **APPENDIX III – PROGRESS SKETCH**

# FINAL PROGRESS SKETCH

# 13 August 2005 Shumagin and Pavlof Islands, AK Tenix LADS Inc. Darren Stephenson, Lead Hydrographer

Deployed to the field on April 28, 2005 for survey commencement on April 29, 2005. This is the status numerically at August 13, 2005 and the chartlet is of July 15, 2005. Both projects OPR-P183-KRL-05 and OPR-P184-KRL-05 have been combined for ease of reporting.

	April	May	June	July	August	Total	Total Planned	% Complete
Days on project	2	23	26	23	10	84		
Line – nm - flown	250	2907.3	2326.96	2482.0	1370.8	9337.1	6025.5	154.9
Aircraft flown hours	3.2	56.23	51.52	67.65	29.6	208.2		
Aircraft on task hours	2.2	40.61	35.05	43.14	22.9	143.9		
Days with flight	1	9	10	12	5	37	32	115.6
Transit to Sand Point		1	0	0	0	1		
No flight due to weather	1	11	16	11	5	44		
No flight due to water quality		0	0	0	0	0		
No flight due to system		2	0	0	0	2		
Hours lost to weather		3	4	4	0	11		
Hours lost to system		7	4	8	0	19		

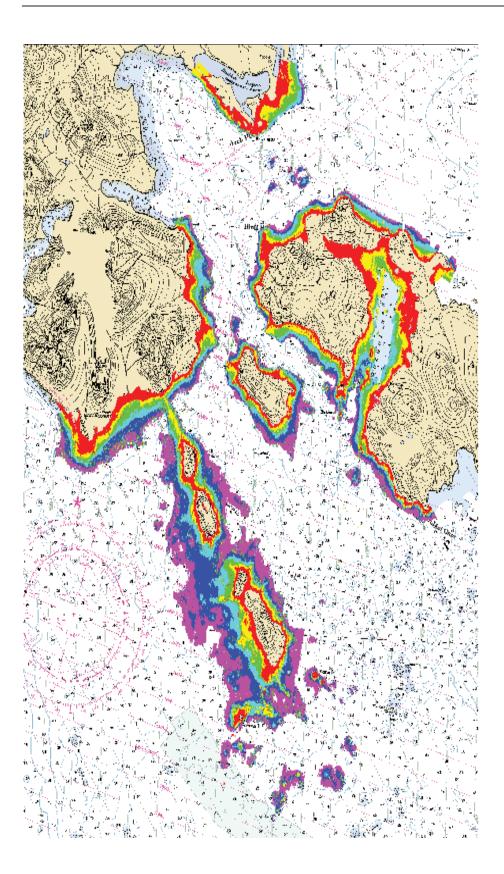

# **APPENDIX IV – TIDES AND WATER LEVELS**

## Abstract of Times of Hydrography

Start and End times refer to tidal applications requirement.

Time on Task indicates actual time of task in the survey area. All times and dates are in UTC.

Date Flown	JD	Sortie No	Start Time	End Time	Time on Task
May-15-05	135	2	0:06	7:00	6:54
May-16-05	136	3	20:06	2:00	5:54
May-19-05	139	5	20:06	4:00	7:54
May-20-05	140	6	23:06	5:00	5:54
May-21-05	141	7	22:06	4:30	6:24
May-22-05	142	8	21:06	6:00	8:54
May-24-05	144	9	14:36	20:00	5:24
June-3-05	154	13	21:06	23:54	2:48
June-4-05	155	14	14:06	16:54	2:48
June-28-05	179	18	19:06	2:30	7:24
July-1-05	182	19	21:36	4:00	6:24
July-6-05	187	21	15:36	22:54	7:18
July-10-05	191	23	17:36	23:30	5:54
July-12-05	193	24	22:06	5:00	6:54
July-15-05	196	26	2:06	7:00	4:54
July-28-05	209	29	0:06	5:06	5:00
July-30-05	211	30	19:00	1:00	5:00

## 05\_7Pavlof

Aug-3-05

Aug-8-05

215

220

31

33

14:00

17:00

22:00

21:12

8:00

4:12

## TIDAL DATUMS

Tidal datums at SAND POINT, POPOF ISLAND based on:

LENGTH OF SERIES:	19 Years
TIME PERIOD:	January 1983 - December 2001
TIDAL EPOCH:	1983-2001
CONTROL TIDE STATION:	

Elevations of tidal datums referred to Mean Lower Low Water (MLLW), in METERS:

HIGHEST OBSERVED WATER LEVEL (12/31/1986)	= 3.531
MEAN HIGHER HIGH WATER (MHHW)	= 2.204
MEAN HIGH WATER (MHW)	= 1.988
MEAN TIDE LEVEL (MTL)	= 1.197
MEAN SEA LEVEL (MSL)	= 1.181
MEAN LOW WATER (MLW)	= 0.406
MEAN LOWER LOW WATER (MLLW)	= 0.000
LOWEST OBSERVED WATER LEVEL (11/15/1993)	= -1.120

Bench Mark Elevation Information In METERS above:

Stamping or Designation	MLLW	MHW
9450 R 1991	4.593	2.605
9450 S 1991	4.582	2.594
9450 T 1991	3.836	1.848
9450 U 1991	4.397	2.409
945 9450 SHEET PILE BOLT	4.006	2.018
9450 V 1992	4.180	2.192
9450 W 1992	3.553	1.565
9450 X 1992	3.731	1.743
9450 Y 1997	4.559	2.571
1293-1 1984	3.585	1.598

Dolgoi Harbor, Island, AK Station ID: 9459758		<b>Dolgoi</b> Dolgoi Harbor, D	Dolgoi Harbor, Dolgoi Island, AK: <u>Da</u> <u>Invento</u> Page He			
	Datums Click <u>HERE</u> for printable version					
	E	Data Units: Feet Meters				
Oct 2 20	006 13:45	ELEVATIONS ON STATION DATUM National Ocean Service (NOAA)				
Station:	9459758		т.м.: 0			
W Name: Meters	DOLGOI HARBO	R, DOLGOI ISLAND, AK	Units:			
Status: 2001	Accepted		Epoch: 1983-			
	Datum	Value Description				
		8.271 Mean Higher-High Water				
	MHW	8.068 Mean High Water				
	DTL	7.237 Mean Diurnal Tide Leve	-1			
	MTL	7.335 Mean Tide Level				
	MSL	7.317 Mean Sea Level				
	MLW	6.603 Mean Low Water				
	MLLW	6.203 Mean Lower-Low Water				
	GT	2.067 Great Diurnal Range				
	MN	1.464 Mean Range of Tide	Thomality			
	DHQ DLO	0.203 Mean Diurnal High Water				
	DLQ 0.400 Mean Diurnal Low Water Inequality HWI 11.39 Greenwich High Water Interval (in Hours)					
	LWI					
	NAVD					
	NAVD Maximum	Highest Water Level on S	tation Datum			
	NAVD	Highest Water Level on S Date Of Highest Water Le	station Datum evel			
	NAVD Maximum Max Date	Highest Water Level on S	tation Datum vvel vvel			
	NAVD Maximum Max Date Max Time	Highest Water Level on S Date Of Highest Water Le Time Of Highest Water Le	tation Datum vvel vvel tation Datum			

Value.

Click <u>HERE</u> for further station information including New Epoch products.

# APPENDIX V – SUPPLEMENTAL SURVEY RECORDS AND CORRESPONDENCE

-----Original Message----- **From:** Edward J Van Den Ameele [mailto:Edward.J.Vandenameele@noaa.gov] **Sent:** Tuesday, May 20, 2003 1:10 AM **To:** 'John K Longenecker'; 'Gary Nelson' **Cc:** 'John Lowell' **Subject:** RE: PHB\_visit\_7\_May\_03

See my two comments below; I'm sure John and Gary will have additional comments -EJ

-----Original Message----From: John K Longenecker [mailto:John.K.Longenecker@noaa.gov]
Sent: Monday, May 19, 2003 7:55 AM
To: Gary Nelson
Cc: John Lowell; Edward J Van Den Ameele
Subject: PHB\_visit\_7\_May\_03

Could you please review and comment or give concurrence to the following statements or assumptions from the recent meeting at PHB? I will compile the response to Mark. Thanks.

#### John

Lidar Anywhere Task Order 1 OPR–P183-KR-03

#### Attendees:

Gary Nelson Bob Mihailov Bruce Olmstead John Lowell John Longenecker Edward J Van den Ameele Mark Sinclair

A meeting was held at Pacific Hydro Branch on 7 May, 2003 at the request of Tenix LADS Inc. The purpose of the meeting was to outline the TLI LADS Mk II survey plan and clarify items in the Statement of Work for Lidar Survey Services.

Summary of items raised:

• The SOW states certain versions of software are to be used. It is acceptable for delivered data to be compatible with the latest versions of Caris and Microstation.

- The requirements for reporting were discussed. 1 HVCR and 1 DAPR are to be provided per Task Order, however each smoothsheet is to have a separate DR which will facilitate standard archiving practices.
- Soundings in kelp were discussed. Sparse soundings in kelp are to be retained in the data set as they provide useful data, even if the coverage in these areas is incomplete. EJ: I believe it was also decided to delineate and denote the extents of kelp areas on the smooth sheet (i.e. with dashed line and "kelp" annotation)
- Automatically generated contours on smooth sheets which are close to gaps in the data, due to kelp or white water, may be placed in the wrong position if they are interpolated form the nearest soundings. In such cases, contours are to be manually edited to reflect the best estimate of the true position of the feature. EJ: This discussion mainly was in reference to the MLLW and MHW lines; and incorrect interpolation of the shoreline from irregularly spaced soundings.
- The requirement to bin the final data set was discussed. A 3 meter clash may be used for the sounding data set in lieu of the 5 meter bin.
- The depiction of drying soundings on the smoothsheet was discussed. Drying soundings shall be at the same density as depths. The datum and units stated in the SOW are to be used.
- 2D Microstation seed files shall be provided to PHB. It was noted that AHB specifies 3D seed files.
- The importance of the correct production of smoothsheets was discussed. Gary Nelson offered to review early drafts and provide feedback. He will also provide an example of a smoothsheet and microstation files.
- EJ advised that for the 2001 survey work, the list of doubtful soundings provided in the DR was very helpful. Such a list shall be provided in the event that doubtful depths are retained in the dataset.
- More information on the interpretation of raw laser waveforms was requested. MJS will plan to visit PHB on his next trip to Alaska and provide a presentation on waveform interpretation.

Prepared by Mark Sinclair Project Director Tenix LADS Inc 14 May 03

----Original Message-----From: David.Scharff [mailto:David.Scharff@noaa.gov] Sent: Thursday, 21 September 2006 4:32 AM To: STEPHENSON Darren Cc: Toshi (E-mail); Gary.Nelson@noaa.gov Subject: Re: FW: Locality Name Darren, Please use "Pavlof Islands and Vicinity, AK" for locality on all TO7 sheets. We've been using "Southwest Alaska Peninsula" more as a project title it really shouldn't have followed locality in the SOW for this task order. Sorry for the confusion. Regards, Dave STEPHENSON Darren wrote: > Dave > > We are about to send the first P184 sheet to PHB for a preliminary review and are having trouble fitting the Locality name in the title block. Or is there a way to fit the locality name into the title block? > > Please see below. > > regards > Darren >> > -----Original Message-----> > From: GUILFORD James > > Sent: Thursday, 21 September 2006 3:50 AM > > To: STEPHENSON Darren > > Subject: Locality Name > > > > Was wondering if we could shorten the Locality name for the Pavlof Sheets. We would like to change it from Pavlof Islands and Vicinity, Southwestern Alaska Peninsula (how it is written in the SOW) to Pavlof Islands and Vicinity, AK. > > > > > > -----> > James Guilford > > Senior Hydrographer > > Tenix LADS Inc. > > 925 Tommy Munro Dr. Ste J > > Biloxi, MS 39532 > > > > Ph (O): 228-594-6800 > > Ph (M): 228-342-3028 > > Fax: 228-594-6887 > >

> > > Disclaimer : > The contents of this e-mail including any attachments are intended only > for the person or entity to which this e-mail is addressed. If you are not, > or believe you may not be, the intended recipient, please advise the sender > immediately by return e-mail, delete this e-mail and destroy any copies. > Tenix does not warrant nor guarantee that this email communication is free > from errors, virus, interception or interference.

----Original Message-----From: David.Scharff [mailto:David.Scharff@noaa.gov] Sent: Wednesday, 2 August 2006 12:49 AM To: STEPHENSON Darren Cc: Toshi (E-mail); kim Sampadian (E-mail); Gary.Nelson@noaa.gov Subject: Re: Pavlof sheet limits Darren, The layout and registry numbers matches the survey outlines you sent us and the sublocalities look good. Just let me know if this is the way you plan on submitting these sheets to PHB so I can make the appropriate changes on our end. Regards, Dave STEPHENSON Darren wrote: > Dave > > Late last year we orientated the sheet limits for the Pavlof Island survey area and the we mistakenly labeled the sheets wrong in some places. I have tried to get this sorted out at our end and went back through emails between us late last year. > > Please see attached the sheets with the sub localities. I hope that these are ok as they are what I believe we agreed too. > <<Pavlof Sheet Limits LADS.pdf>> > regards > > Darren Stephenson > Survey Manager > Tenix LADS Incorporated > > Disclaimer : > The contents of this e-mail including any attachments are intended only > for the person or entity to which this e-mail is addressed. If you are not, > or believe you may not be, the intended recipient, please advise the sender > immediately by return e-mail, delete this e-mail and destroy any copies. > Tenix does not warrant nor guarantee that this email communication is free > from errors, virus, interception or interference. > \_\_\_\_\_ > \_\_\_\_\_ > Name: Pavlof Sheet Limits LADS.pdf Type: Portable Document Format > (application/pdf) > Pavlof Sheet Limits LADS.pdf Encoding: base64

```
>
Pavlof_Sheet_Limits_LADS.pdf
>
message
```

Description:

Download Status: Not downloaded with

Sheet A H11436 Arch Point to Bluff Point. HI1437 Sheet D H11439 Outer Iliasik Island Sheet C (6) Sheet E H11487 Southwest of Dolgor Island Belkofski Point Sheet F H11488 Outer Iliasik Island

```
----Original Message-----
From: Toshi Uozumi [mailto:Toshi.Uozumi@noaa.gov]
Sent: Thursday, 5 October 2006 2:06 AM
To: STEPHENSON Darren
Subject: Re: Lliasik or Iliasik Island
Darren,
You are correct. It is on the current chart and prior survey as I L I A
SIK.
Toshi
STEPHENSON Darren wrote:
> Dave
>
> We are just about to send the reports for H11438 and have picked an
inconsistency in the wording of Inner Iliaslik and Outer Iliasik Islands on
the chart compared to the SOW. We believe that it is Iliasik as apposed to
Lliasik as written in the SOW.
> Can you please clarify this so that we can amend the reports prior to
dispatch.
>
> regards
>
> Darren Stephenson
> Survey Manager
> Tenix LADS Incorporated
>
>
> Disclaimer :
> The contents of this e-mail including any attachments are intended only
> for the person or entity to which this e-mail is addressed. If you are
not,
> or believe you may not be, the intended recipient, please advise the
sender
> immediately by return e-mail, delete this e-mail and destroy any copies.
> Tenix does not warrant nor guarantee that this email communication is
free
> from errors, virus, interception or interference.
>
>
```

# **APPENDIX VI – AWOIS**

No AWOIS were assigned to this task order.

#### APPROVAL SHEET H11439

#### Initial Approvals:

The survey evaluation and verification has been conducted according to branch processing procedures and the HCell compiled per the latest OCS HCell Specifications.

The survey and associated records have been inspected with regard to survey coverage, delineation of the depth curves, development of critical depths, S-57 classification and attribution of soundings and features, cartographic characterization, and verification or disproval of charted data within the survey limits. The survey records and digital data comply with OCS requirements except where noted in the Descriptive Report and are adequate to supersede prior surveys and nautical charts in the common area.

I have reviewed the HCell, accompanying data, and reports. This survey and accompanying digital data meet or exceed OCS requirements and standards for products in support of nautical charting except where noted in the Descriptive Report.