

H11951

NOAA FORM 76-35A

U.S. DEPARTMENT OF COMMERCE  
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  
NATIONAL OCEAN SERVICE

## DESCRIPTIVE REPORT

*Type of Survey* ..... HYDROGRAPHIC

*Field No.* ..... M-L906-KR-08

*Registry No.* ..... H11951

### LOCALITY

*State* ..... California

*General Locality* ..... Pacific Ocean-- Southern California

*Sublocality* ..... Vicinity of San Augustine

**2008**

### CHIEF OF PARTY

..... Dean Moyles

### LIBRARY & ARCHIVES

DATE .....

NOAA FORM 77-28 (11-72)	U.S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  <b>HYDROGRAPHIC TITLE SHEET</b>	U.S. DEPARTMENT OF COMMERCE NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION  <b>HYDROGRAPHIC TITLE SHEET</b>	REGISTRY No  <b>H11951</b>
<b>INSTRUCTIONS</b> – The Hydrographic Sheet should be accompanied by this form, filled in as completely as possible, when the sheet is forwarded to the Office.	FIELD No  <b>N/A</b>	State <u>California</u> General Locality <u>Pacific Ocean-- Southern California</u> Sub-Locality <u>Vicinity of San Augustine</u> Scale <u>n/a</u> Dates of Survey <u>8/15/2008-9/04/2008</u> Instructions dated <u>7/7/2008</u> Project No. <u>M-L906-KR-08</u> Vessel <u>R/V QUICKSILVER (947419), F/V PACIFIC STAR (556510), R/V R2(623241), R/V D2(647782)</u> Chiefs of party <u>Dean Moyles</u> Surveyed by <u>Orthmann, Moyles, Reynolds, Barrow, Zurita, Todd, Tidey, Cameron, Mount, et.al.</u> Soundings by echo sounder, hand lead, pole <u>Reson Seabat 7125 Echosounders hull mounted</u> Graphic record scaled by <u>Fugro Pelagos, Inc. Personnel</u> Graphic record checked by <u>Fugro Pelagos, Inc. Personnel</u> Automated Plot <u>HP Design Jet 500</u> Verification by <u>Andrew Clos</u> Soundings in <u>Fathoms and feet at MLLW</u>	
<b>REMARKS:</b> <u>Time in UTC. UTM Projection Zone 11.</u> <u>Revisions and annotations appearing as endnotes were generated during office processing. As a result, page numbering may be interrupted or non-sequential.</u> <u>All separates are filed with the hydrographic data.</u> <u>Fugro Pelagos, Inc.</u> <u>3738 Ruffin Road</u> <u>San Diego, CA 92123</u>			



## A. AREA SURVEYED

H11951 (Sheet AG) is in the vicinity of San Augustine, California. It is bound by the coordinates listed in Table 1.<sup>1</sup>

This data was collected by Fugro Pelagos, Inc. for NOAA and the State of California's Coastal Conservancy. While the State of California's interest in this data is primarily for fisheries habitat mapping, the necessary steps to meet NOAA specifications and make the data suitable to OCS for nautical charting purposes have been taken, as detailed in the 2008 Specifications and Deliverables and described in this and accompanying reports.

Hydrographic data collection began on August 15, 2008 and ended on September 4, 2008.

**Table 1 – Sheet Bounds**

<b>Point</b>	<b>Latitude (North)</b>	<b>Longitude (West)</b>
1	34-29-12	120-25-15
2	34-29-12	120-11-05
3	34-22-06	120-11-05
4	34-22-06	120-25-15
5	34-29-12	120-25-15

Note: The western bounds were modified slightly (shifted further west) from originally planned to include additional survey area.

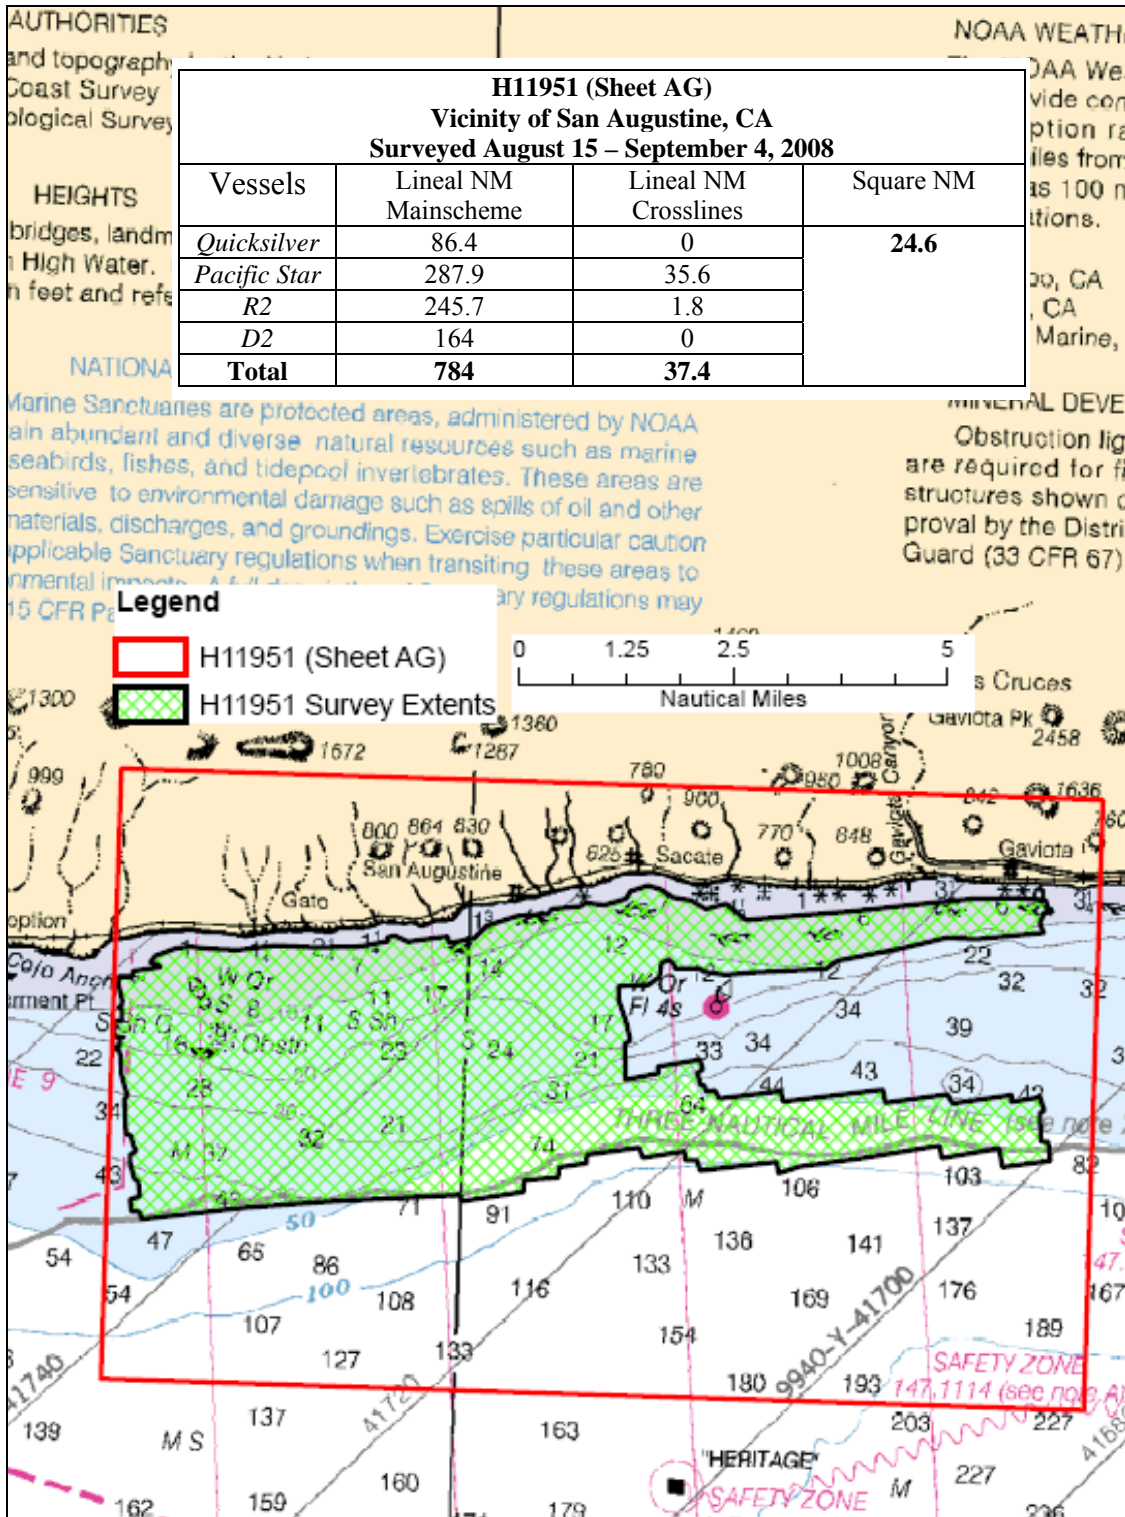


Figure 1 H11951 Area Surveyed

## **B. DATA ACQUISITION AND PROCESSING**

Refer to the M-L906-KR-08 Data Acquisition and Processing Report for a detailed description of all equipment, survey vessels, processing procedures and quality control features. Items specific to this survey and any deviations from the Data Acquisition and Processing Report are discussed in the following sections.<sup>2</sup>

### B.1 Equipment & Vessels

The R/V's Quicksilver, R2, D2 and F/V Pacific Star acquired all sounding data for H11951.

The Quicksilver, which is 32 feet in length with a draft of 3 feet, was equipped with a Reson Seabat 7125 for multibeam data acquisition. The vessel was also equipped with two AML sound velocity and pressure sensors (SV&P) for sound velocity profiles. Vessel attitude and position were measured using an Applanix Position and Orientation System for Marine Vessel (POSMV 320 V4) with S7K files logged in Winfrog Multibeam v 3.08.23.

The Pacific Star, which is 162 feet in length with a draft of 16 feet, was equipped similarly to the Quicksilver except a Reson Seabat 8111 (not used during this survey) and a Brooks Ocean Moving Vessel Profiler (MVP) were installed as well.

R2 and D2 – both launches of the Pacific Star – were equipped similarly to the Quicksilver.

Refer to M-L906-KR-08 Data Acquisition and Processing Report for a complete listing of equipment and vessel descriptions.

### B.2 Quality Control

#### Crosslines

Quality control crosslines were planned so that most main scheme lines would intersect with at least one crossline, were well distributed geographically, and that total crossline nautical miles ran would total 5% of the main scheme nautical miles.

At project end, total crossline length surveyed was 37.4 nautical miles or 4.8 percent of the total main scheme nautical miles.<sup>3</sup> All crosslines were compared to the mainline CUBE surface, using the CARIS HIPS QC report routine and all beams passed at 95 percent confidence level or better.<sup>4</sup> Results are located in Separate IV.<sup>5</sup>

Note: The QC reports were generated based on the given accuracy specification of:

$\pm \sqrt{(a^2 + (b * d)^2)}$  where  $a = 0.2$ ,  $b = 0.01$ , and  $d = \text{depth}$ .

However, since a variance of a difference, rather than a variance from a mean is being used, the a and b values were defined in the user defined option within the CARIS HIPS QC Report routine as follows:

$$a = 0.2 * \sqrt{2} = 0.283$$

$$b = 0.01 * \sqrt{2} = 0.014$$

### Uncertainty Values


The majority of H11951 had uncertainty values of 0.25 m to 0.70 m, which met project specifications.<sup>6</sup>

As seen in the uncertainty surface, uncertainty is generally lowest near the sonar nadir beams and increases toward the outside of each swath. This is expected and primarily a result of sound velocity error uncertainty.

Oscillations from port to starboard along lines in the uncertainty surface are due to higher uncertainty computed due to vessel roll, again prevalent mostly in the outer beams.

Higher uncertainties are seen in areas of steep or rapidly changing bottom topography, and areas where outer beams were left to contribute to the surface. However, despite high uncertainty in these areas, data matchup is good and the data acceptable for nautical charting purposes.

Small patches of higher uncertainty are evident in the uncertainty surface coinciding with lines or sections of lines. This was due to relatively high RMS error in the GPS positioning data during these times, usually due to brief gaps in logged GPS data. However, despite high estimated error, the error did not propagate to the tidal corrections as the data matchup is good in these areas.<sup>7</sup>

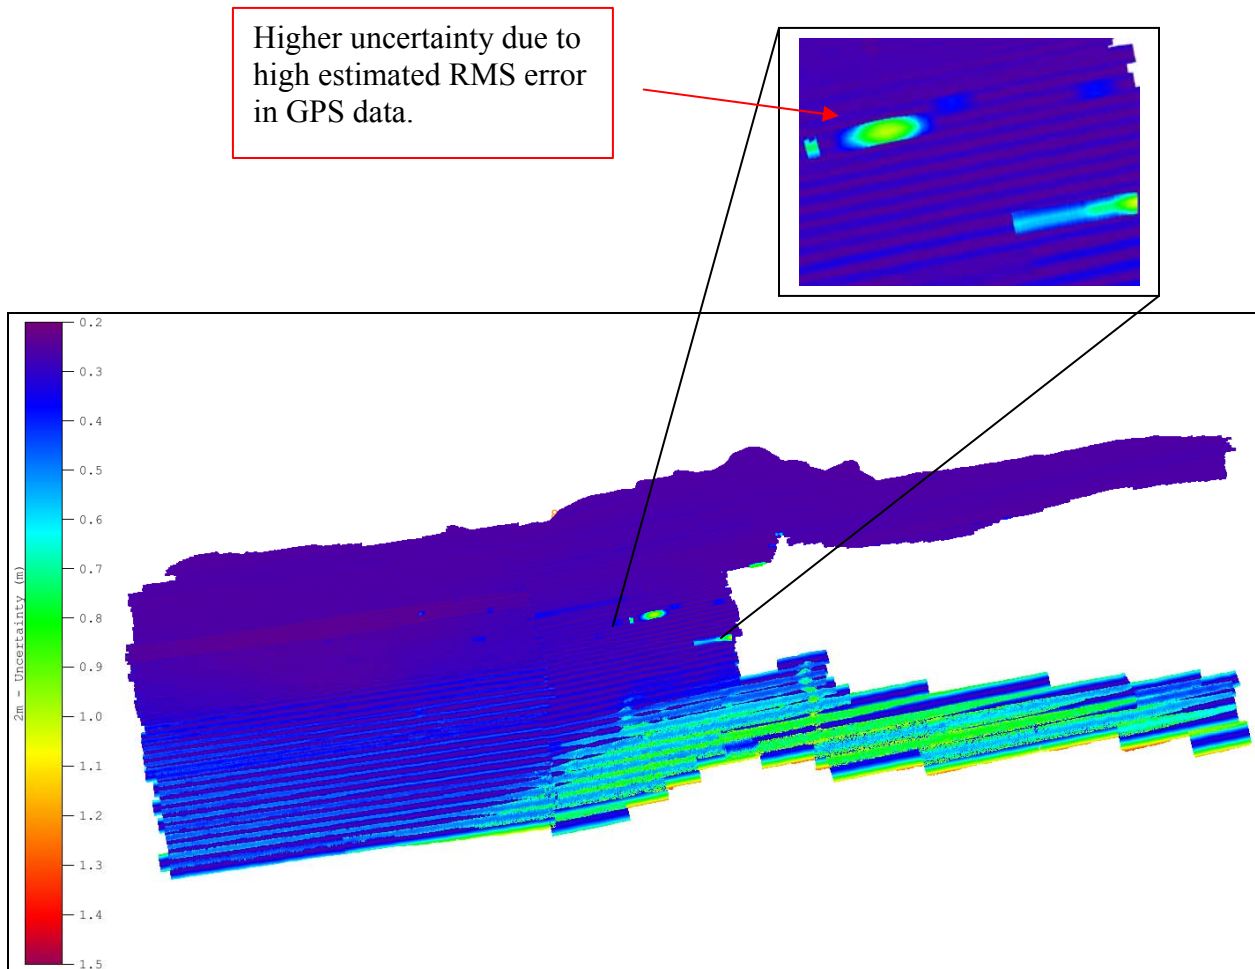

**Figure 2 Uncertainty DTM**





The surveys are in agreement along their common borders.<sup>8</sup> The agreement was noted in the field using the CUBE surfaces during subset cleaning. The conformity is also apparent in the Final Combined BASE Surfaces.

### Quality Control Checks

Positioning system confidence checks were conducted on a daily basis using the POSMV controller software. The controller software had numerous real-time displays that were monitored throughout the survey to ensure the positional accuracies, specified in the NOS Hydrographic Surveys Specifications and Deliverables were achieved. These include, but are not limited to the following: GPS Status, Position Accuracy, Receiver Status (which included HDOP) and Satellite Status. During periods of high HDOP and/or low number of available satellites survey operations were stopped.

### Comparison of PPK-GPSTide and Zoned Verified Tides


Tidal corrections for this survey were done using PPK-GPS derived altitudes which were reduced to MLLW using VDatum grids and the CARIS HIPS GPSTide function. Since conventional tidal data and zones were available, gross error and reality check comparisons were done between data corrected using both methods. The following tests were performed:

1. For a snapshot of general agreement throughout the survey area, a copy of the crossline data was corrected using zoned, verified smoothed tides, and dynamic draft correctors applied. QC reports were then generated in HIPS for these “tidal” crosslines versus the BASE surfaces (GPSTide method) in the same manner described in the crossline comparison section above.

Results: All “tidal” beams passed at 95 % or better as compared to the BASE surfaces. Results are available in Separate IV.

2. In order to identify and quantify any static offsets between the two processing methods, a difference surface was created in IVS Fledermaus using a CUBE surface created from the crosslines and a CUBE surface created from the same crosslines corrected using zoned, verified smooth tides. (Difference surface = tidal surface minus GPSTide surface, both 5m resolution)

Results: Average difference was 0.021 m, median difference was 0.030 m, with a standard deviation of 0.19 m. Therefore, the GPSTide surface was about 2 cm deeper on average. Two of the crosslines had GPS spikes that caused large differences in the surfaces. When this was seen in main-scheme lines the poor GPS data would be rejected or recomputed using alternate base stations.

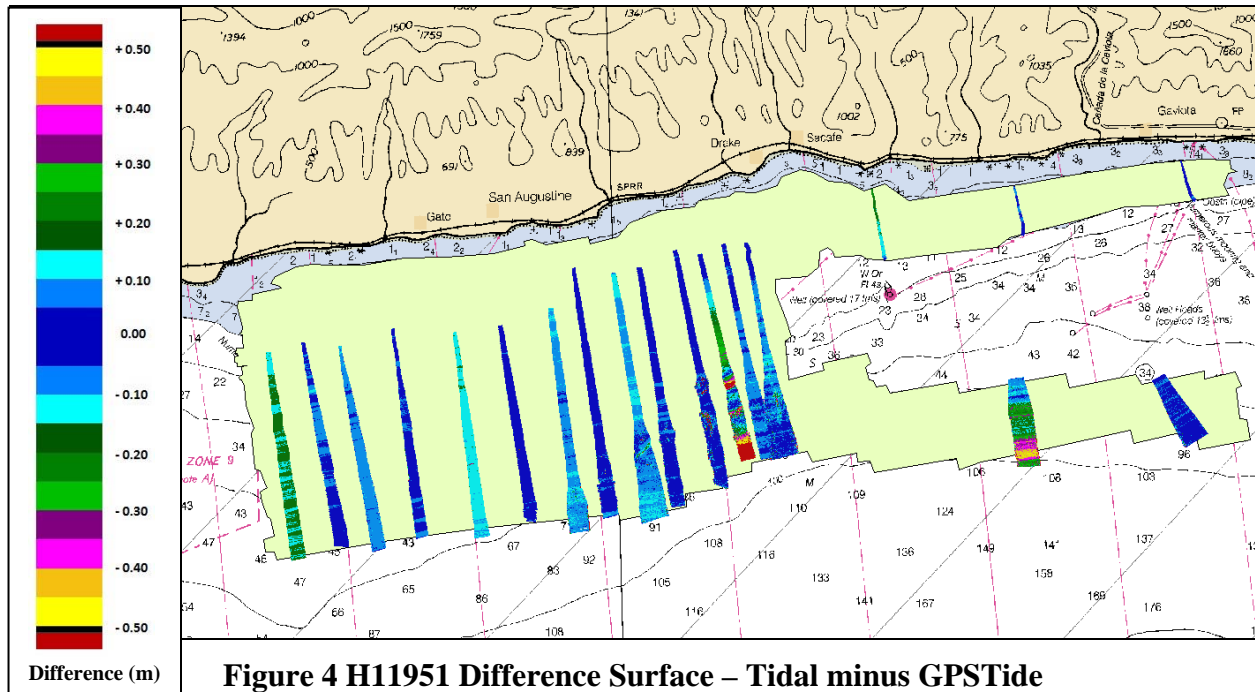

In conclusion, absolute correctness of one source of tidal correction over the other cannot be determined by direct comparisons between the two data sets. However, data corrected using both methods statistically compares very well to each other, and qualitatively the matchup between adjacent lines is good using both methods. Therefore, for this survey, the GPSTide method of tidal correction meets specification and is an acceptable alternative to the standard tidal method.<sup>9</sup>

### Data Quality

In general, the multibeam data quality for H11951 was good. Three notable problems follow:

1. A general downward and/or upward cupping is noticeable in the across track sounding profiles for certain areas and is attributed to sound velocity error. This is possibly due to a high volume of thermal layering and strong under currents in the water column. This problem was addressed by conducting SVP casts more frequently and reducing the line spacing interval.<sup>10</sup>
2. Some tide busts occur sporadically between adjacent lines. This was due to lower post-processed GPS accuracy than normal on certain lines. Though the busts are apparent in subset edit mode, they are relatively small (less than 0.10 m) and within specifications.<sup>11</sup>
3. Many holidays in the 0.5 m coverage in northwest corner of survey area (centered around 34-26-50 N, 120-24-24). After surveying in the area and applying tide correction it was apparent the area was shallower than the project target minimum depth of 10 meters;

therefore no effort was made to in-fill the holidays. Though coverage is nearly complete in this area, it is possible not all least depths were obtained.<sup>12</sup>

The R2 and D2 launches and Quicksilver collected sound velocity profiles every two hours to compensate for velocity changes over time. Profiles were collected on alternate ends of lines, or often in the middle of lines, to minimize the spatial aspect of sound velocity changes.

The MVP system on the Pacific Star was also used at an interval of every two hours, except the system was used to collect as many as five profiles along the course of a single line. Two hours later, another set of profiles would be collected, the net result being a grid of sound velocity profiles that kept differences in time and distance minimal between the survey data and the in-use sound velocity profile.

Object detection requirements were met by minimizing vessel speed when necessary, using sonar range scales appropriate to the water depth to maximize ping rates, and maximizing swath overlap. These variables were adjusted in real-time by the online acquisition crew based on the Winfrog QC and coverage displays. The office-based processing crew provided feedback after preliminary processing and coverage creation in CARIS HIPS, and reported re-runs or in-fills as necessary to the acquisition crew.

Refer to the M-L906-KR-08 Data Acquisition and Processing Report for a detailed description of the survey equipment and methodology used over the course of this survey.

### B.3 Corrections to Echo Soundings

Refer to the M-L906-KR-08 Data Acquisition and Processing Report for a detailed description of all corrections to echo soundings. No deviations from the report occurred.

### B.4 Data Processing

Refer to the M-L906-KR-08 Data Acquisition and Processing Report for a detailed description of the processing flow.

The final fieldsheet for H11951 is called “H11951” and it contains six BASE surfaces. The following parameters were used:

- 0-22 meters: 0.5 m resolution, name “H11951\_0\_5m”
- 20-33 meters: 1 m resolution, name “H1195\_1m”
- 0-45 meters: 1.5 m resolution, name “H11951\_1\_5m”
- 40-84 meters: 2 m resolution, name “H11951\_2m”
- 80-100 meters: 4 m resolution, name “H11951\_4m”

90-250 meters: 5 m resolution, name “H11951\_5m”

Note: Maximum depth was approximately 200 m, therefore resolutions coarser than 5 m were not computed.

The final S57 file for this project is called “H11951\_S57\_Features.000”. This file contains the object and metadata S57 objects as required in the Specifications and Deliverables.

## **C. VERTICAL AND HORIZONTAL CONTROL**

Refer to the M-L906-KR-08 Horizontal and Vertical Control Report<sup>13</sup> for a detailed description of the horizontal and vertical control used on this survey. No deviations from the report occurred. A summary of the project’s horizontal and vertical control follows.

### Horizontal Control

The horizontal control datum for this survey was the North American Datum of 1983 (NAD83).

For real-time DGPS corrections, a CSI MBX-3 unit tuned to the Lompoc USCG DGPS site was used. The unit output differentially corrected positions at 1 Hz to the POSMV 320 V4 where it was integrated with inertial data and a position for the top-center of the IMU was generated. This position was then logged concurrently with the bathymetry by Winfrog and logged to the POS file by Winfrog POS logger. It was later corrected for offsets to the MBES sonar by CARIS HIPS in processing.

Final positioning, however, was done using post-processed kinematic (PPK) methods. Applanix POSPac software was used in conjunction with the POS files and local base station data to generate a higher accuracy position which was applied in processing, replacing the real-time position records.

See M-L906-KR-08 Horizontal and Vertical Control Report for a more detailed description of PPK positioning methods used.

### Vertical Control

All sounding data were initially reduced to MLLW using predicted tidal data from the Gaviota Pier predicted tide station. Predicted tides were used only for preliminary data cleaning.

Final tidal corrections were generated using PPK processing methods in conjunction with NOAA’s VDATUM model and the CARIS GPSTide routine. Applanix POSPac software produced a smoothed best estimate of trajectory (SBET) file that, among other data, contained GPS altitudes based on the NAD83 ellipsoid. The SBET altitudes were loaded in to every line in

CARIS HIPS, and HIPS' GPSTide routine then run to compute a GPS-based tide. The GPSTide routine used a VDatum NAD83 to MLLW offset grid to produce MLLW tide correctors. This grid is an XYZ text file and is included with the CARIS data under the tide directory.

See M-L906-KR-08 Horizontal and Vertical Control Report for a more detailed description of the GPSTide methods.

## D. RESULTS AND RECOMMENDATIONS

### D.1 Chart Comparison

H11951 survey was compared with the charts shown on Table 2.

**Table 2 – Chart Comparisons**

Chart Number	Type	Cell Name	Scale	Edition	Edition Date
18721	Raster	n/a	1:100,000	11 <sup>th</sup>	July 2000
18720	Raster	n/a	1:232,188	33 <sup>rd</sup>	August 2008
18720	ENC	US3CA69M	n/a	9 <sup>th</sup>	September 2008

### Comparison of Soundings

A comparison of soundings was accomplished by generating shoal-biased soundings and contours in the CARIS FieldSheet Editor and overlaying them on the latest edition NOAA charts. The general agreement between charted soundings and H11951 soundings was noted. A more detailed comparison was undertaken for any charted shoals or other dangerous features.


Agreement between soundings on this survey and all charts is good (Raster and ENC), with BASE surface depths comparing to charted soundings generally within +/- 1 fathom.<sup>14</sup>

### Automated Wreck and Obstruction Information System

There were no AWOIS items assigned to H11952.<sup>15</sup> There is one recommended addition:

1. Uncharted wreck at 34-26-07.73 N, 120-23-24.38 W. The 61 m by 11 m feature is unambiguously wreck-like. It rests in about 11.7 fathoms of water and rises to a depth of

9.5 fathoms under the surface. It was not found in the AWOIS database. An obstruction (depth of 9 fathoms) is charted at this position on 18721 and 18720. Recommend replacing Obstn with Wreck on affected charts, and addition to the AWOIS database. <sup>16</sup>

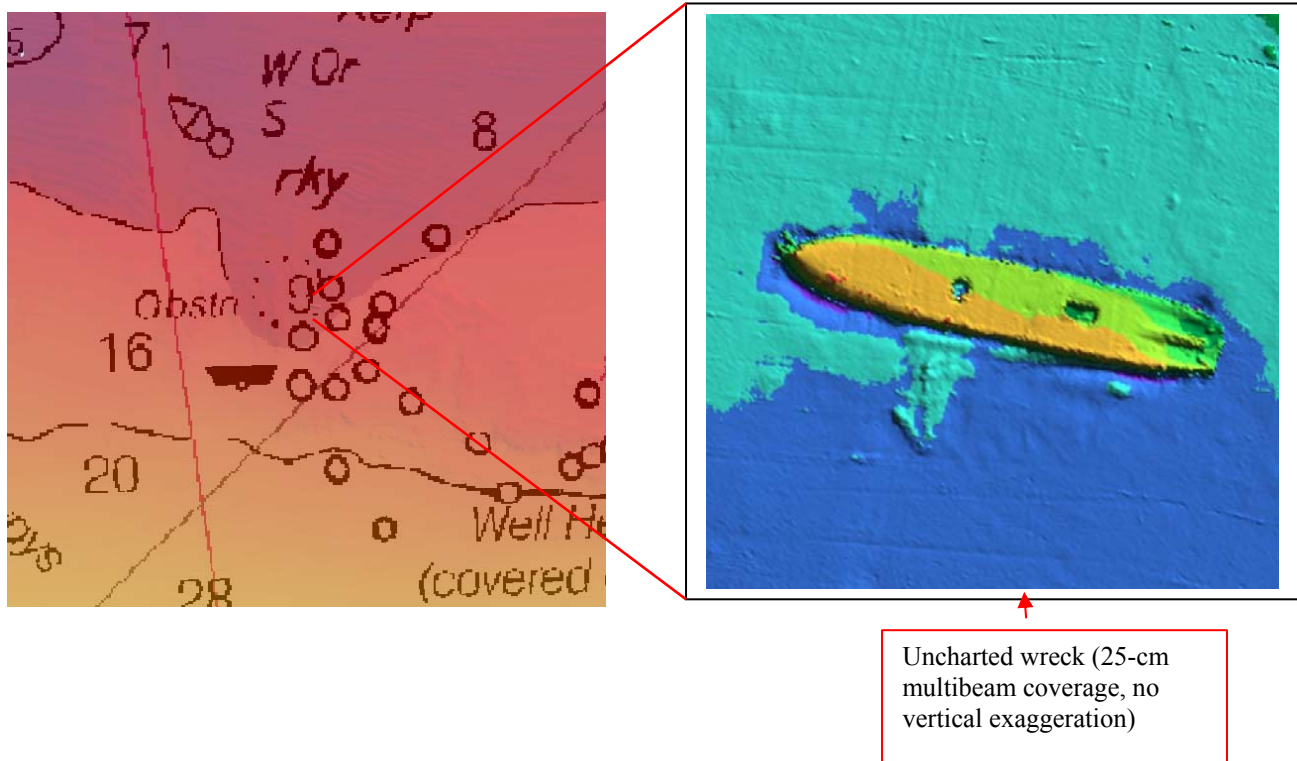

**Figure 5 Uncharted Wreck**

### Charted Features

There were no charted features labeled ED, PD, or PA within the limits of H11951.

1. “Well Heads (covered 6 ½ fms)” centered around 34-25-54 N, 120-23-08 W on chart 18721 were not confirmed by this survey. However, it is likely well heads would have a diameter smaller than the 2008 specification’s requirements for object detection coverage and could therefore be easily missed. Recommend retain well heads as charted. <sup>17</sup>
2. “Well Head (covered 19 fms)” at 34-25-53.70 N, 120-21-33.29 W on chart 18721 was not confirmed by this survey. Examination of the multibeam soundings reveals a few hits on something at this position (min depth 21.953 fms) but results are inconclusive. It is likely the well head would have a diameter smaller than the 2008 specification’s

requirements for object detection coverage and could therefore be easily missed. Recommend retain well head as charted. <sup>18</sup>

3. All charted kelp confirmed.
4. General position of mooring buoys confirmed.

#### Dangers to Navigation

No dangers to navigation were found during this survey. <sup>19</sup>

#### D.2 Additional Results

None to note. <sup>20</sup>

#### Bottom Samples

None were assigned for this sheet. <sup>21</sup>

#### Aids to Navigation

No charted aids to navigation existed in the survey area. <sup>22</sup>

No uncharted aids to navigation were found in the survey area. <sup>23</sup>

## E. APPROVAL SHEET

### Approval Sheet

For

**H11951**

Standard field surveying and processing procedures were followed in producing this survey in accordance with the following documents:


M-L906-KR-08 Statement of Work  
NOS Hydrographic Surveys Specifications and Deliverables, April 2008 Edition  
Fugro Pelagos, Inc. Acquisition Procedures (2008- NOAAAcquisitionProcedures);  
Fugro Pelagos, Inc. Processing Procedures (2008-NOAAProcessingProcedures);

The data were reviewed daily during acquisition and processing, and the survey is complete and adequate for its intended purpose.

This report has been reviewed and approved. All records are forwarded for final review and processing to the Chief, Pacific Hydrographic Branch.

Approved and forwarded,

Dean Moyles,  
Lead Hydrographer  
Fugro Pelagos, Inc. Survey Party

 Digitally signed by Dean Moyles  
DN: cn=Dean Moyles,  
email=dmoyles@fugro.com, o=Fugro  
Pelagos, Inc., l=San Diego, CA  
Date: 2008.12.03 22:17:00 Z

---

Dean Moyles  
ACSM Certified



---

<sup>1</sup> Concur.

<sup>2</sup> Filed with project records.

<sup>3</sup> Although the 5% requirement for crosslines was not met, the crosslines were sufficient for a confidence report.

<sup>4</sup> Concur.

<sup>5</sup> Filed with hydrographic records.

<sup>6</sup> Concur. These data are adequate to supersede charted data in the common area.

<sup>7</sup> Concur.

<sup>8</sup> Concur.

<sup>9</sup> Concur.

<sup>10</sup> The data in the areas with SV errors meet specifications.

<sup>11</sup> Concur.

<sup>12</sup> Concur.

<sup>13</sup> Filed with project records.

<sup>14</sup> Concur.

<sup>15</sup> Concur.

<sup>16</sup> Concur. Features was reported to California SHPO 4/09.

<sup>17</sup> Concur. Retain well heads.

<sup>18</sup> Concur. Retain well head.

<sup>19</sup> Concur.

<sup>20</sup> Concur.

<sup>21</sup> Concur. All charted bottom samples retained.

<sup>22</sup> Concur.

<sup>23</sup> Concur.

**H11951 HCell Report**  
Andrew Clos, Hydrographic Survey Intern  
Pacific Hydrographic Branch

**Introduction**

The primary purpose of the HCell is to directly update NOAA ENC's with new survey information in International Hydrographic Organization (IHO) format S-57. HCell compilation of survey H11951 utilized Office of Coast Survey HCell Specifications Version 3.0, May 2008 and HCell User Guide Version 1.2, July 2008. HCell H11951 will be used to update charts:

18721, 1:100,000 (11<sup>th</sup> Ed.; July 8<sup>th</sup>, 2000, NM 2/28/2009)  
18720, 1:232,188 (33<sup>rd</sup> Ed.; August, 2008, NM 08/09/2008)  
ENC US3CA69M.

**1. Compilation Scale**

The density of soundings in the HCell is compiled as appropriate to emulate those soundings of Chart 18721, 1:100,000. Position and density of non-bathymetric features included in the HCell have not been generalized from the scale of the hydrographic survey H11951.

**2. Soundings**

**2.1 Source Data**

One 5-meter resolution Combined BASE surface, **H11951\_Combined** was used as the basis for HCell production following Branch certification.

A survey-scale sounding (SOUNDG) feature object source layer was built from the **H11951\_Combined** surface in CARIS BASE Editor. A shoal-biased selection was made at 1:15,000 survey scale using a radius table with values shown in **Table 1**.

Upper limit (m)	Lower limit (m)	Radius (mm)
0	10	3
10	20	4
20	50	4.5
50	200	5

**Table 1**

**2.2 Sounding Feature Objects**

In CARIS BASE Editor soundings were manually selected from the high density sounding layer from H11951 and imported into a new layer created to accommodate chart

density depths. Manual selection was used to accomplish a density and distribution that more closely represents the seafloor morphology and that emulates density and distribution of soundings on charts 18721 than is possible using automated methods. See section 10.1, Data Processing Notes, for details about the use of manual sounding selection for H11951. The sounding feature object source layer was imported into the **H11951\_CS.hob** file, which was used as a template to create the S-57 Composer product **H11951\_CS.prd**.

### **3. Depth Areas**

#### **3.1 Source Data**

Using the combined BASE surface **H11951\_Combined** one depth area was generated. No depth contours were delivered per OCS HCell Specifications ver.3.0 and HCell User Guide ver. 1.2.

#### **3.2 Depth Area Feature Objects**

One depth range, 0 meters to 205 meters, was used the depth area object. Upon conversion to NOAA charting units, this depth range is 0 fathoms to 112.1 fathoms.

### **4. Meta Areas**

The following Meta object areas are included in HCell **US411951\_CS.000**:

M\_QUAL  
M\_COVR

Meta area objects were constructed on the basis of perimeter lines delineating the surveyed limits and extents of data gaps inside the survey area. These perimeters were first used to create the DEPART layer, then were duplicated to the Meta object layers and attributed per the HCell Specifications, ver. 3.0 and HCell User Guide ver. 1.2.

### **5. Survey Features**

A features file **H11951\_S57\_Features.000** was delivered. The file contained rocky seabed areas delineated using the base surface, one new wreck, and four points of heavy kelp.

The rocky seabed areas delineated by Fugro were far too detailed for small scale charts in the area. Rocky seabed areas were re-digitized during office processing using the high resolution surfaces delivered to the Pacific Hydrographic Branch.

The new wreck and points of kelp are included in the HCell as delivered.

Several features from chart 18721 were not addressed by H11951. These features were manually digitized from 18721 to be included in the HCell. Features imported from ENC US3CA69M have SORINDs and SORDATs from smaller scale charts 18720. The positions of features on the smaller scale chart and ENC are too generalized and do not have the required accuracy to be compiled to the HCell for chart 18721.

A wreck and obstruction object are located within 75 meters of each other as seen in pictures below. It is recommended that the OBSTRN object from the ENC be deleted since no least depth of 8 fathoms exists. It is recommended that the OBSTRN object be recharted as a WRECK or OBSTRN with a least depth of 9 fathoms, 4 feet.

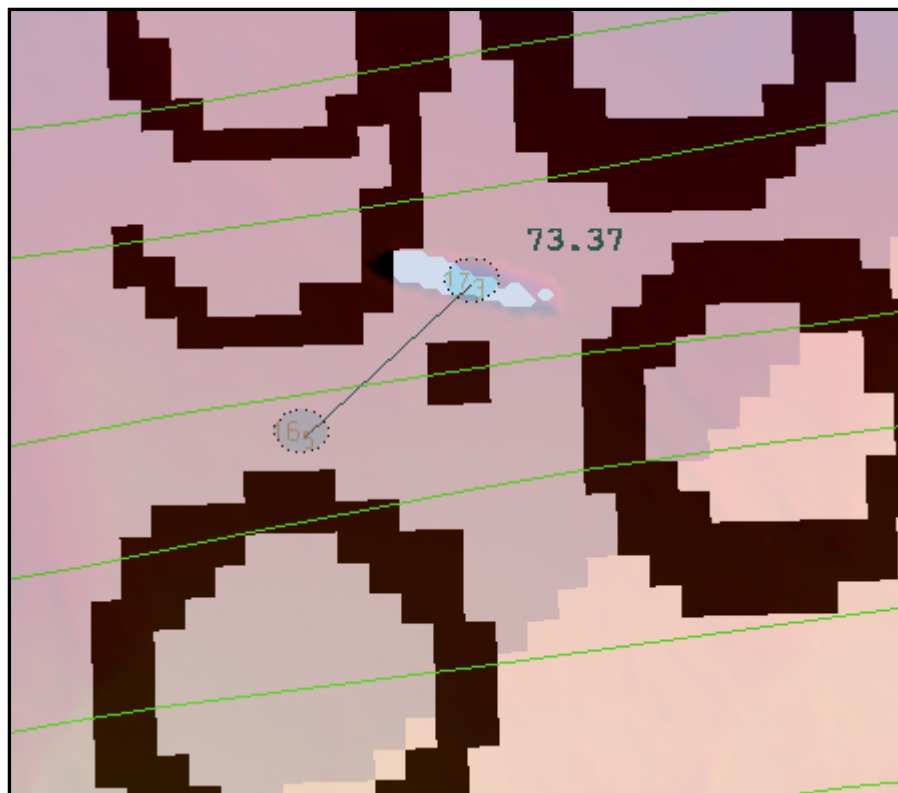


Image 1: Showing distance in meters between WRECK object to the north and OBSTRN object to the south.

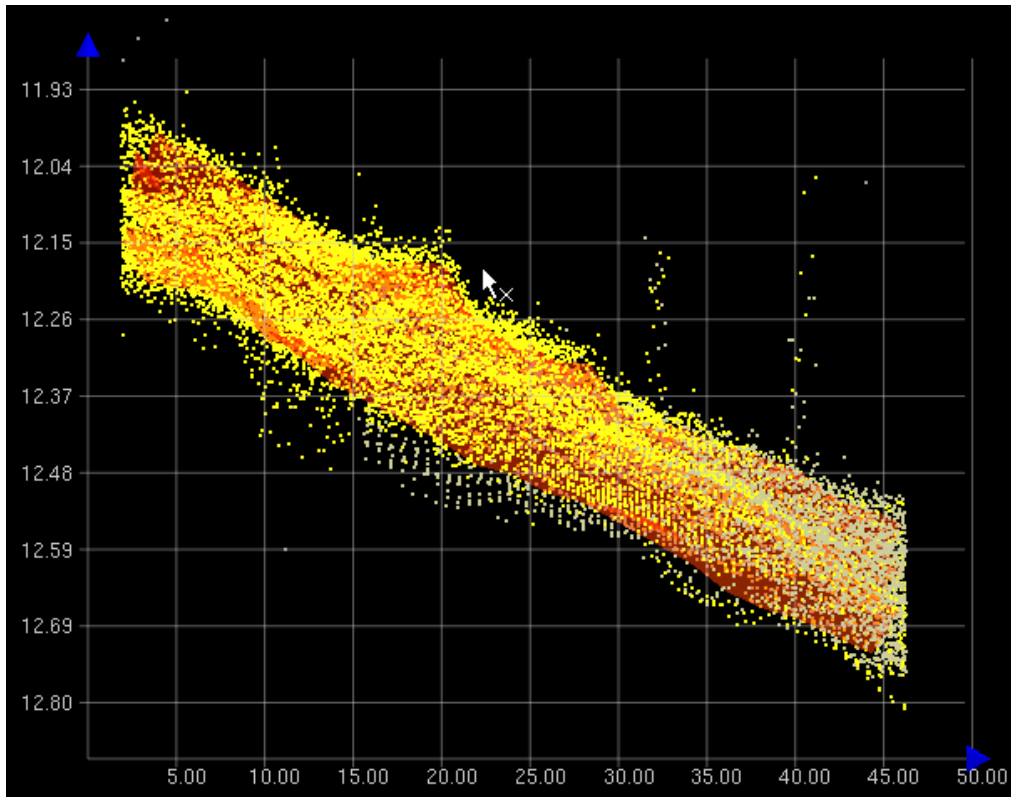


Image 2: Non-existent OBSTRN object.

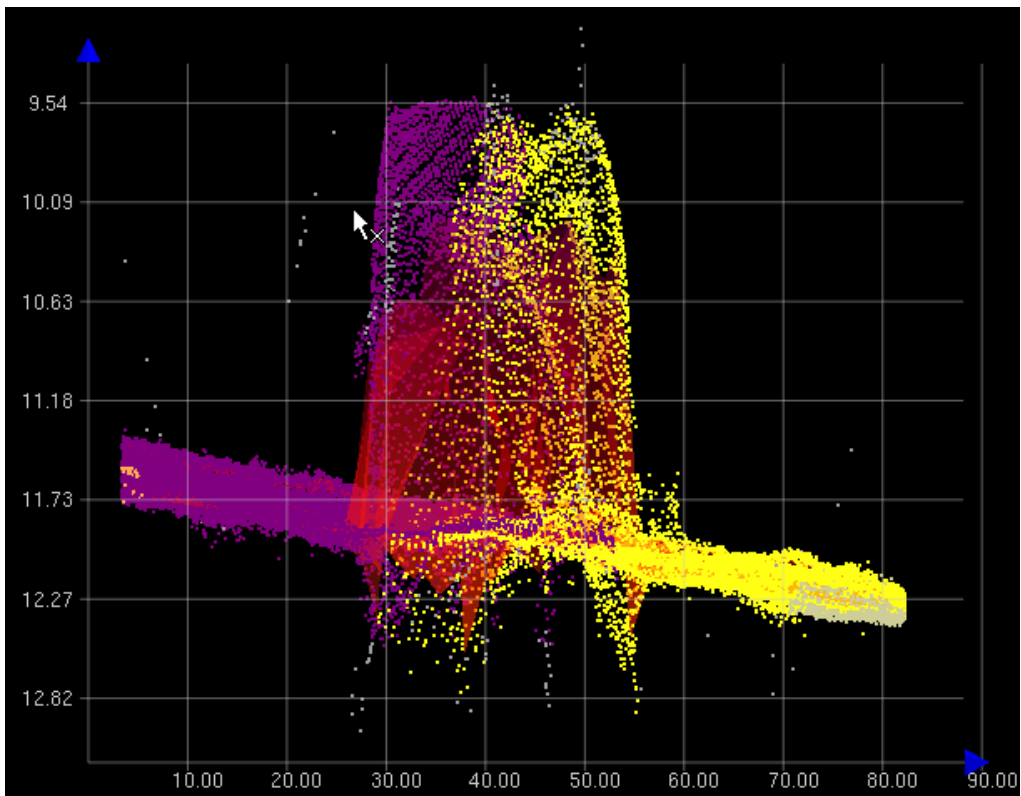


Image 3: WRECK Object.

## 6. Shoreline / Tide Delineation

H11951\_HCell\_CS.000 does not contain any features affected by tide and contains no shoreline.

## 7. Attribution

All S-57 Feature Objects have been attributed as fully as possible based on information provided by the Hydrographer and in accordance with OCS HCell Specifications, ver. 3.0 and HCell User Guide ver. 1.2.

## 8. Layout

### 8.1 CARIS S-57 Composer Scheme

SOUNDG	Chart scale soundings
DEPARE	Group 1 objects (Skin of the Earth)
SBDARE	Bottom samples from chart and areas digitized from surface
MORFAC	Mooring buoy
OBSTRN	Point obstruction (well head)
WRECKS	Wreck
M_COVR	Data coverage meta object
M_QUAL	Data quality meta object
\$CSYMB	Blue notes
WEDKLP	Kelp objects.

### 8.2 Blue Notes

Notes regarding data sources are in S-57 Composer as a \$CSYMB feature with the blue note located in the INFORM field and the survey registry number, chart number, chart edition and edition date located in the NINFOM field. The blue notes are included in the HCell when it is exported to .000. The blue notes are also included as a separate ASCII file **H11951\_Bluenotes.txt**.

## 9. Spatial Framework

### 9.1 Coordinate System

All spatial map and base cell file deliverables are in an LLDG geographic coordinate system, with WGS84 horizontal, MHW vertical, and MLLW (1983-2001 NTDE) sounding datums.

### 9.2 Horizontal and Vertical Units

During creation of sounding sets in CARIS BASE Editor, and creation of the HCell in CARIS S-57 Composer, units are maintained as metric with millimeter resolution. NOAA

rounding is applied at the same time that conversion to chart units is made to the metric HCell base cell file, at the end of the HCell compilation process.

A CARIS environment variable, `uslXsounding_round`, controls the depth at which rounding occurs. Setting this variable to NOAA fathoms and feet displays all soundings equal to or greater than 11 fathoms as whole units. Depths shoaler than 11 fathoms are shown in fathoms and feet.

In an ENC viewer fathoms and feet display in the format `X.YZZZ`, where X is fathoms, Y is feet, and ZZZ is decimals of the foot. For fathoms and feet between 0 and 10 fathoms 4.5 feet (10.75 fms), soundings round to the deeper foot if the decimals of the foot are `X.Y75000` or greater. For fathoms and feet deeper or equal to 11 fathoms, soundings round to the deeper fathom if feet and decimals of the foot are `X.45000` (`X.Y75000`) or greater. Drying heights are in feet and are rounded using arithmetic methods. In an ENC viewer, heights greater than 6 feet will register in fathoms and feet using the above stated rules.

#### S-57 Composer

Sounding Units:	Meters rounded to the nearest millimeter
Spot Height Units:	Meters rounded to the nearest meter

#### Chart Unit Base Cell Units

Depth Units (DUNI):	Fathoms and feet
Height Units (HUNI):	Feet (or fathoms and feet above 6 feet)
Positional Units (PUNI):	Meters

## 10. QA/QC

### 10.1 Data Processing Notes

Manual chart scale sounding selections were made for this survey. Experience has shown that in areas where bathymetry is varied, as in the case of varied topography on the sea floor, automated sounding selection is impractical. None of the default sounding suppression options offered in CARIS BASE Editor or S-57 Composer yields an acceptable density and distribution of depths, generally bunching soundings nearshore with too sparse coverage seaward. While the customized options are more practical for this type of terrain, an inordinate amount of time must be spent in experimentation with variations on the algebraic terms in order to devise the most suitable formula, and manual adjustments are still required to the resulting sounding set.

### 10.2 ENC Validation Checks

H11951 was subjected to QA and Validation checks in S-57 Composer prior to exporting to the HCell base cell (000) file. Full millimeter precision was retained in the export of the metric S-57 base cell data set. This data set was converted to a chart unit 000 file. dKart Inspector 5.1 was then used to further check the data set for conformity using the S-58 ver. 2

standard (formerly Appendix B.1 Annex C of the S-57 standard). All tests were run and errors investigated and corrected where necessary.

## 11. Products

### 11.1 HSD, MCD and CGTP Deliverables

- H11951 Base Cell File, Chart Units, Soundings compiled to 1:100,000
- H11951 Base Cell File, Chart Units, Soundings compiled to 1:15,000
- H11951 Descriptive Report including end notes compiled during office processing and certification
- H11951 HCell Supplemental Report
- Blue Notes ASCII file

### 11.2 File Naming Conventions

S-57 Composer Product prefix: *H11951\_HCell\_CS.prd and H11951\_SS.prd*

MCD Chart units base cell file: *US411951\_CS.000*

MCD Chart units base cell file, survey scale soundings: *US411951\_SS.000*

### 11.3 Software

HIPS 6.1:	Management and inspection of Combined BASE surfaces
BASE Editor 2.1:	Combination of Product Surfaces and initial creation of the S-57 bathymetry-derived features
S-57 Composer 2.0:	Assembly of the HCell, S-57 products export, QA
HOM 3.3:	Assembly of the HCell, S-57 products unit conversion and sounding rounding
GIS 4.4a:	Setting the sounding rounding variable
dKart Inspector 5.1:	Validation of the base cell file

## 12. Contacts

Inquiries regarding this HCell content or construction should be directed to:

Andrew Clos, Hydrographer Intern, PHB, Seattle, WA; 206-526-6871; Andrew.clos@noaa.gov.



APPROVAL SHEET  
H11951

Initial Approvals:

The survey evaluation and verification has been conducted according to branch processing procedures and the HCell compiled per the latest OCS H-Cell Specifications.

The survey and associated records have been inspected with regard to survey coverage, delineation of the depth curves, development of critical depths, S-57 classification and attribution of soundings and features, cartographic characterization, and verification or disproval of charted data within the survey limits. The survey records and digital data comply with OCS requirements except where noted in the Descriptive Report and are adequate to supersede prior surveys and nautical charts in the common area.

I have reviewed the HCell, accompanying data, and reports. This survey and accompanying digital data meet or exceed OCS requirements and standards for products in support of nautical charting except where noted in the Descriptive Report.