

B.6 ZONING

The final tide zones were designed to incorporate at least one observed tide station (established by BOV). In some of the zones two observed tide stations were used to provide a co-tidal model. An analysis of depth benchmark and crossline comparisons, and overlaps of the mainlines of sounding concluded that final tide zoning was adequate. The final tide zones superseded the preliminary tide zone. *Concur.*

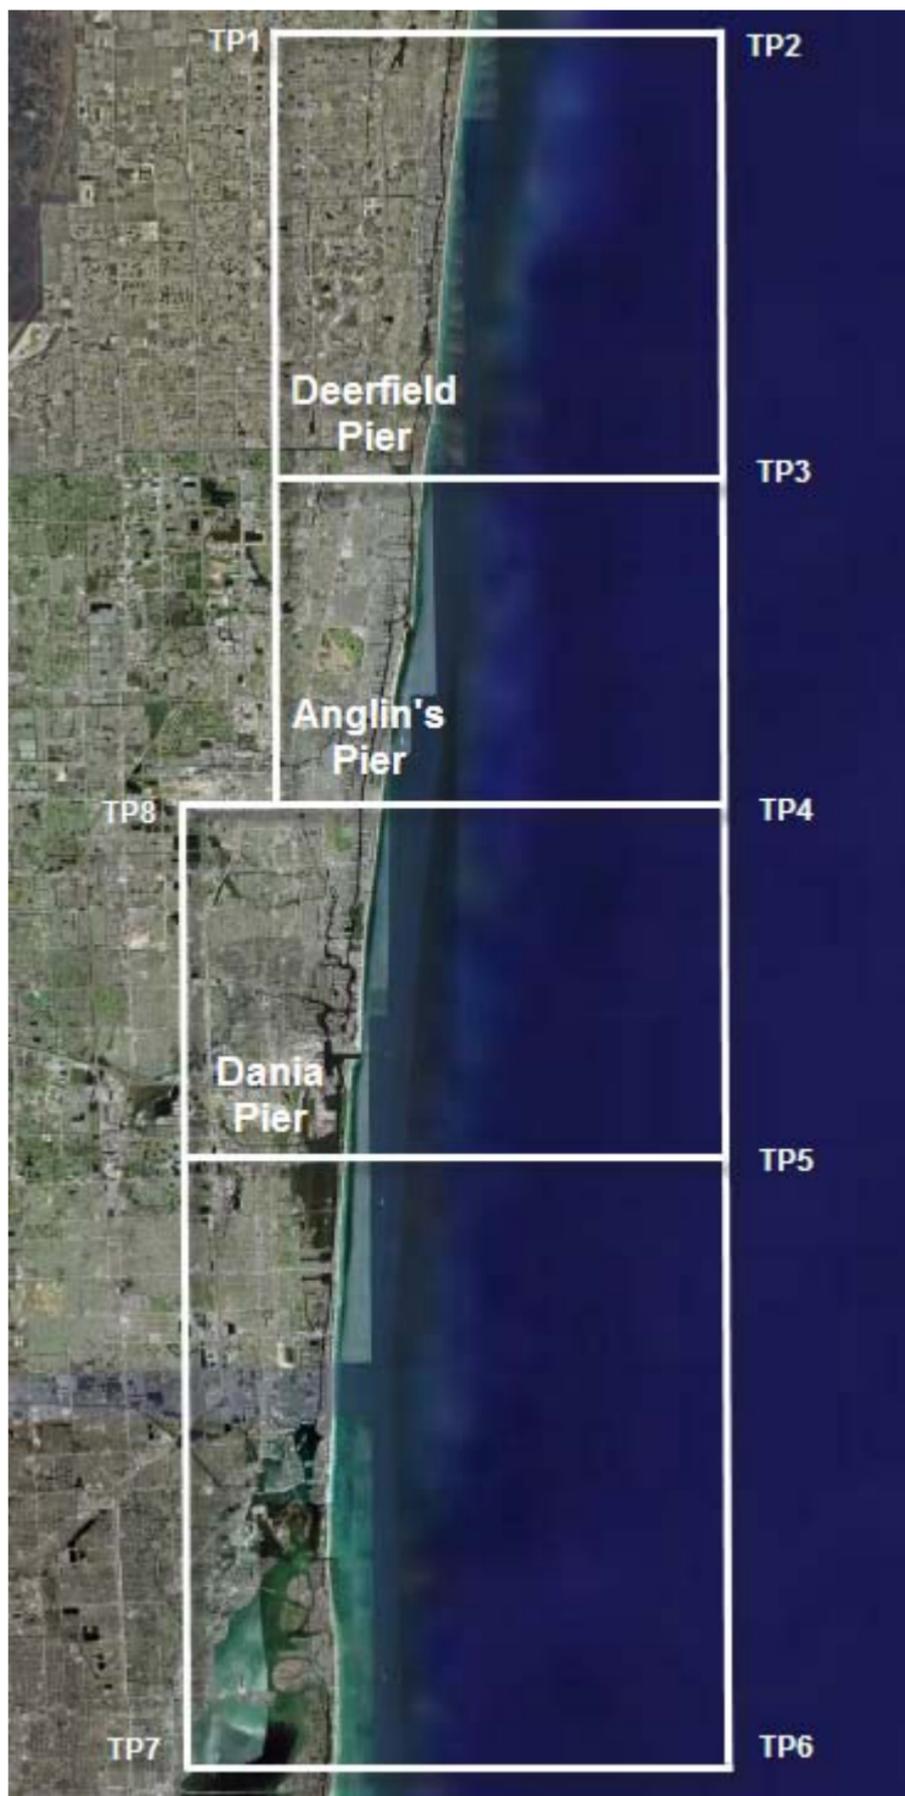


Figure 3 – Final Tide Zones in the LADS GS