

H13245

U.S. Department of Commerce
National Oceanic and Atmospheric Administration
National Ocean Service

DESCRIPTIVE REPORT

Type of Survey: Navigable Area

Registry Number: H13245

LOCALITY

State(s): Alaska

General Locality: Bristol Bay

Sub-locality: Approach to Nanvak Bay

2019

CHIEF OF PARTY
CDR Marc Moser, NOAA

LIBRARY & ARCHIVES

Date:

HYDROGRAPHIC TITLE SHEET

H13245

INSTRUCTIONS: The Hydrographic Sheet should be accompanied by this form, filled in as completely as possible, when the sheet is forwarded to the Office.

State(s): **Alaska**

General Locality: **Bristol Bay**

Sub-Locality: **Approach to Nanvak Bay**

Scale: **40000**

Dates of Survey: **07/10/2019 to 07/13/2019**

Instructions Dated: **04/30/2019**

Project Number: **OPR-R320-FA-19**

Field Unit: **NOAA Ship Fairweather (S220)**

Chief of Party: **CDR Marc Moser, NOAA**

Soundings by: **Multibeam Echo Sounder**

Imagery by: **Multibeam Echo Sounder Backscatter**

Verification by: **Pacific Hydrographic Branch**

Soundings Acquired in: **meters at Mean Lower Low Water**

Remarks:

The purpose of this survey is to provide contemporary surveys to update National Ocean Service (NOS) nautical charts. All separates are filed with the hydrographic data. Any revisions to the Descriptive Report (DR) generated during office processing are shown in bold red italic text. The processing branch maintains the DR as a field unit product, therefore, all information and recommendations within the body of the DR are considered preliminary unless otherwise noted. The final disposition of surveyed features is represented in the OCS nautical chart update products. All pertinent records for this survey, including the DR, are archived at the National Centers for Environmental Information (NCEI) and can be retrieved via <http://www.ncei.noaa.gov/>.

Table of Contents

A. Area Surveyed.....	1
A.1 Survey Limits.....	1
A.2 Survey Purpose.....	2
A.3 Survey Quality.....	3
A.4 Survey Coverage.....	3
A.6 Survey Statistics.....	4
B. Data Acquisition and Processing.....	6
B.1 Equipment and Vessels.....	6
B.1.1 Vessels.....	6
B.1.2 Equipment.....	7
B.2 Quality Control.....	7
B.2.1 Crosslines.....	7
B.2.2 Uncertainty.....	9
B.2.3 Junctions.....	10
B.2.4 Sonar QC Checks.....	15
B.2.5 Equipment Effectiveness.....	15
B.2.6 Factors Affecting Soundings.....	16
B.2.7 Sound Speed Methods.....	16
B.2.8 Coverage Equipment and Methods.....	16
B.2.9 NOAA Allowable Uncertainty.....	16
B.2.10 Density.....	17
B.3 Echo Sounding Corrections.....	18
B.3.1 Corrections to Echo Soundings.....	18
B.3.2 Calibrations.....	18
B.4 Backscatter.....	19
B.5 Data Processing.....	20
B.5.1 Primary Data Processing Software.....	20
B.5.2 Surfaces.....	21
B.5.3 Data Logs.....	21
C. Vertical and Horizontal Control.....	21
C.1 Vertical Control.....	22
C.2 Horizontal Control.....	22
D. Results and Recommendations.....	23
D.1 Chart Comparison.....	23
D.1.1 Electronic Navigational Charts.....	23
D.1.2 Maritime Boundary Points.....	23
D.1.3 Charted Features.....	23
D.1.4 Uncharted Features.....	23
D.1.5 Shoal and Hazardous Features.....	24
D.1.6 Channels.....	24
D.1.7 Bottom Samples.....	24
D.2 Additional Results.....	25
D.2.1 Shoreline.....	25

D.2.2 Aids to Navigation	25
D.2.3 Overhead Features	26
D.2.4 Submarine Features	26
D.2.5 Platforms	26
D.2.6 Ferry Routes and Terminals	26
D.2.7 Abnormal Seafloor and/or Environmental Conditions	26
D.2.8 Construction and Dredging	26
D.2.9 New Survey Recommendation	26
D.2.10 Inset Recommendation	26
E. Approval Sheet	27
F. Table of Acronyms	28

List of Tables

Table 1: Survey Limits	1
Table 2: Survey Coverage	3
Table 3: Hydrographic Survey Statistics	5
Table 4: Dates of Hydrography	6
Table 5: Vessels Used	6
Table 6: Major Systems Used	7
Table 7: Survey Specific Tide TPU Values	9
Table 8: Survey Specific Sound Speed TPU Values	10
Table 9: Junctioning Surveys	11
Table 10: Primary bathymetric data processing software	20
Table 11: Primary imagery data processing software	20
Table 12: Submitted Surfaces	21
Table 13: ERS method and SEP file	22
Table 14: Largest Scale ENC's	23

List of Figures

Figure 1: H13245 sheet limits (in blue) overlaid onto chart 16305	2
Figure 2: H13245 survey coverage overlaid onto Chart 16305	4
Figure 3: Overview of H13245 Crosslines	8
Figure 4: H13245 Crossline and Mainscheme Difference Statistics	9
Figure 5: Overview of H13245 junction surveys	11
Figure 6: Difference surface between H13245 (purple) and junctioning survey H13238 (pink)	12
Figure 7: Difference surface statistics between H13245 and H13238 (4 meter surface)	13
Figure 8: Difference surface between H13245 (purple) and junctioning survey H13239 (light blue)	14
Figure 9: Difference surface statistics between H13245 and H13239 (4 meter surface)	15
Figure 10: H13245 Allowable uncertainty statistics	17
Figure 11: H13245 Data density statistics	18
Figure 12: Backscatter Mosaic for H13245	19
Figure 13: Backscatter Calibration Values	20

[Figure 14: H13245 Bottom sample locations.....](#) [25](#)

Descriptive Report to Accompany Survey H13245

Project: OPR-R320-FA-19

Locality: Bristol Bay

Sublocality: Approach to Nanvak Bay

Scale: 1:40000

July 2019 - July 2019

NOAA Ship Fairweather (S220)

Chief of Party: CDR Marc Moser, NOAA

A. Area Surveyed

The survey area is located the vicinity of Bristol Bay, Alaska, within the sublocality of the approach to Nanvak Bay.

A.1 Survey Limits

Data were acquired within the following survey limits:

Northwest Limit	Southeast Limit
58° 38' 13.35" N 162° 4' 15.26" W	58° 33' 20.03" N 161° 45' 47.93" W

Table 1: Survey Limits

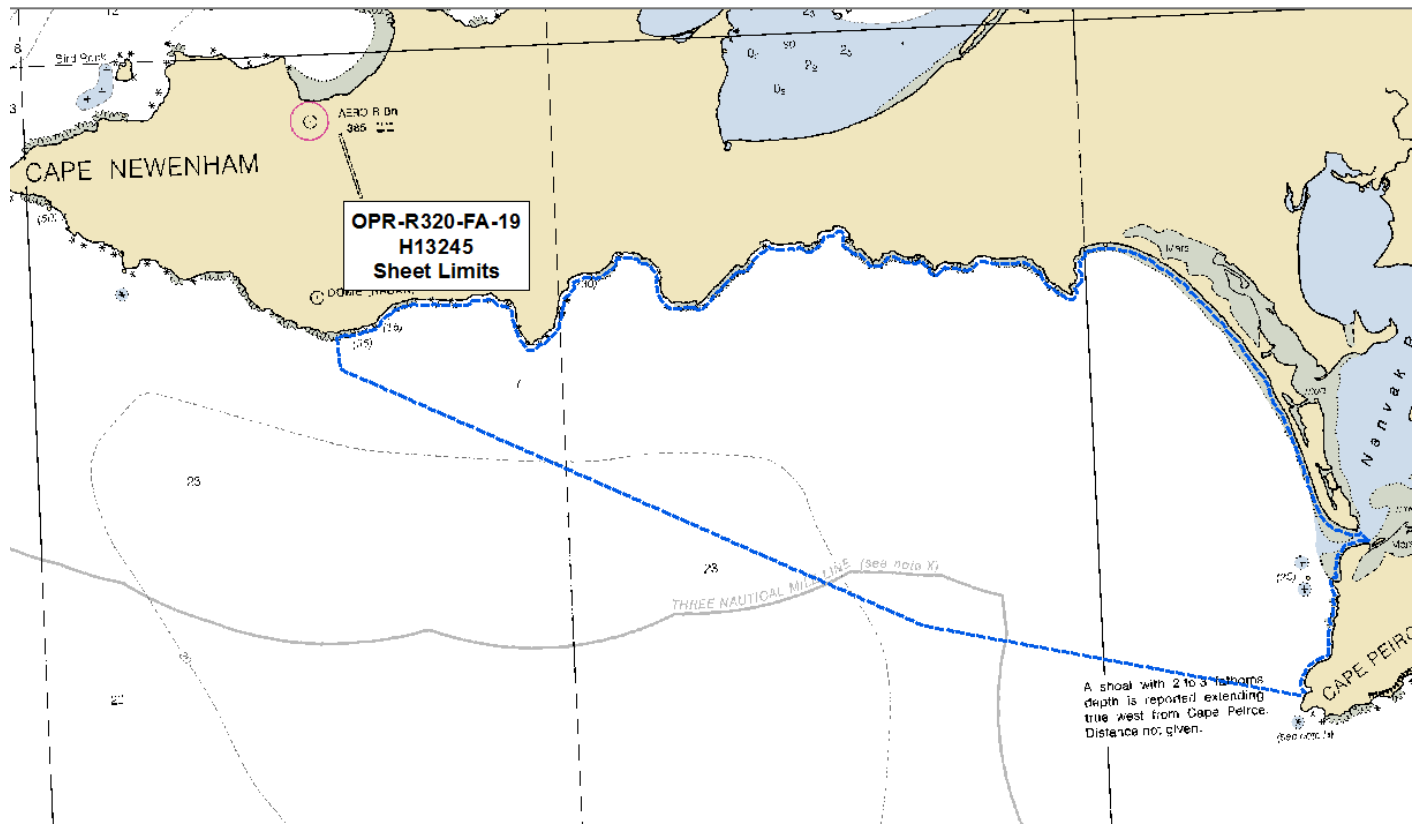


Figure 1: H13245 sheet limits (in blue) overlaid onto chart 16305

Data were acquired to the survey limits in accordance with the requirements in the Project Instructions and the March 2019 NOS Hydrographic Surveys Specifications and Deliverables (HSSD) as shown in Figure 1. In all areas where the 3.5 meter depth contour or the sheet limits were not met, the Navigable Area Limit Line (NALL) was defined as the inshore limit of bathymetry due to the risks of maneuvering the survey vessel in proximity to the steep shoreline.

A.2 Survey Purpose

The purpose of this hydrographic survey is to update National Ocean Service nautical charting products and support commerce to the northern Bristol Bay region. Capes Newenham and Peirce, Alaska are the southwestern corner of the Togiak National Wildlife Refuge and provide habitat to numerous birds and sea mammals. Ship and barge traffic delivering industrial, consumer, and energy products to the communities of northern Bristol Bay, or continuing north to the Etolin Strait must transit around these capes. Marine commerce is critical for the survival of these western Alaskan communities as they are detached from the rest of the state road system. Legacy hydrographic data in this sheet area is extremely sparse and was acquired prior to the 1920s. Updating the nautical charts and accurately charting reported shoals by modern hydrographic means is critical for the future safety of regional commerce, local tanker lightering, emergency

response, and the protection of the local wildlife. Survey data from the project is intended to supersede all prior survey data in the common area.

A.3 Survey Quality

The entire survey is adequate to supersede previous data.

Data acquired in H13245 meet multibeam echo sounder (MBES) coverage requirements for set line spacing, as required by the HSSD. This includes crosslines (see Section B.2.1), NOAA allowable uncertainty (see Section B.2.9), and density requirements (see Section B.2.10).

A.4 Survey Coverage

The following table lists the coverage requirements for this survey as assigned in the project instructions:

Water Depth	Coverage Required
All waters in survey area	Set Line Spacing MBES at 400 meters.

Table 2: Survey Coverage

The entirety of H13245 was acquired with with set line spacing MBES at 400 meters, meeting the requirements listed above and in the HSSD. See Figure 2 for an overview of coverage.

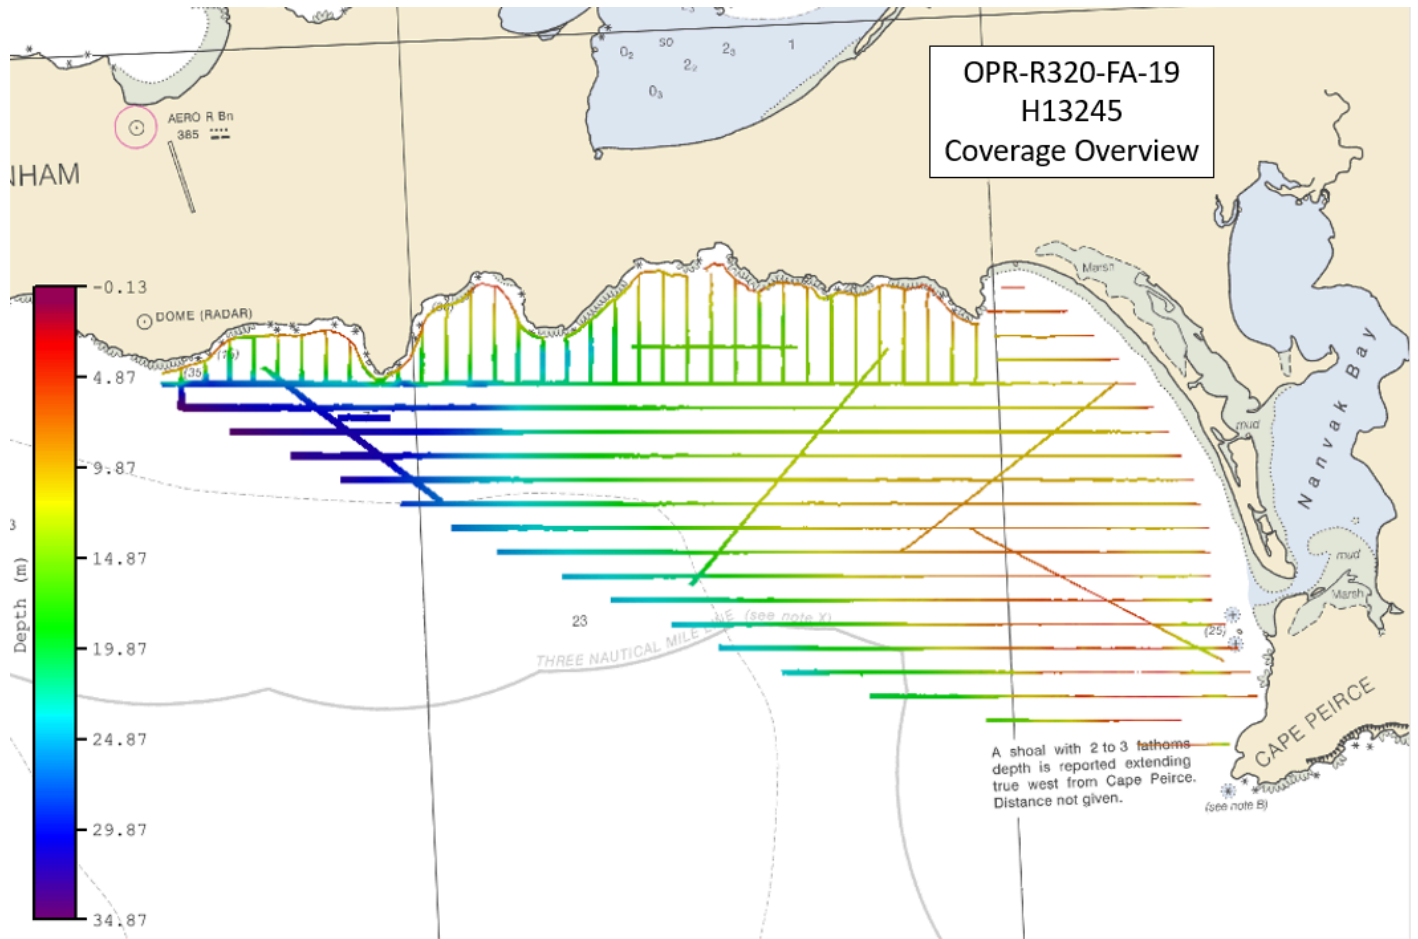


Figure 2: H13245 survey coverage overlaid onto Chart 16305

A.6 Survey Statistics

The following table lists the mainscheme and crossline acquisition mileage for this survey:

	HULL ID	<i>FA 2805</i>	<i>FA 2807</i>	<i>Total</i>
LNM	SBES Mainscheme	0	0	0
	MBES Mainscheme	39.82	90.74	130.56
	Lidar Mainscheme	0	0	0
	SSS Mainscheme	0	0	0
	SBES/SSS Mainscheme	0	0	0
	MBES/SSS Mainscheme	0	0	0
	SBES/MBES Crosslines	0	11.33	11.33
	Lidar Crosslines	0	0	0
Number of Bottom Samples				5
Number Maritime Boundary Points Investigated				0
Number of DPs				0
Number of Items Investigated by Dive Ops				0
Total SNM				26.9

Table 3: Hydrographic Survey Statistics

The following table lists the specific dates of data acquisition for this survey:

Survey Dates	Day of the Year
07/09/2019	190

Survey Dates	Day of the Year
07/11/2019	192
07/12/2019	193

Table 4: Dates of Hydrography

B. Data Acquisition and Processing

B.1 Equipment and Vessels

Refer to the OPR-R320-FA-19 Data Acquisition and Processing Report (DAPR) for a complete description of data acquisition and processing systems, survey vessels, quality control procedures and data processing methods. Additional information to supplement sounding and survey data, and any deviations from the DAPR are discussed in the following sections.

B.1.1 Vessels

The following vessels were used for data acquisition during this survey:

Hull ID	<i>FA 2807</i>	<i>FA 2805</i>
LOA	8.6 meters	8.6 meters
Draft	1.1 meters	1.1 meters

Table 5: Vessels Used

B.1.2 Equipment

The following major systems were used for data acquisition during this survey:

Manufacturer	Model	Type
Kongsberg Maritime	EM 2040	MBES
Sea-Bird Scientific	SBE 19plus V2	Conductivity, Temperature, and Depth Sensor
Teledyne RESON	SVP 71	Sound Speed System
Applanix	POS MV 320 v5	Positioning and Attitude System

Table 6: Major Systems Used

B.2 Quality Control

B.2.1 Crosslines

Multibeam/single beam echo sounder/side scan sonar crosslines acquired for this survey totaled 8.68% of mainscheme acquisition.

Crosslines were collected, processed and compared in accordance with Section 5.2.4.2 of the HSSD. To evaluate crosslines, a surface generated via data strictly from mainscheme lines and a surface generated via data strictly from crosslines were created. From these two surfaces, a difference surface (mainscheme - crosslines = difference surface) was generated (Figure 3), and is submitted in the Separates II Digital Data folder. As shown in Figure 4, statistics show the mean difference between depths derived from mainscheme data and crossline data was 0.01 meters with mainscheme being deeper and 95% of nodes falling within +/- 0.17 meters (Figure 4). For the respective depths, the difference surface was compared to the allowable NOAA uncertainty standards. In total greater than 95.5% of the depth differences between H13245 mainscheme and crossline data were within allowable NOAA uncertainties.

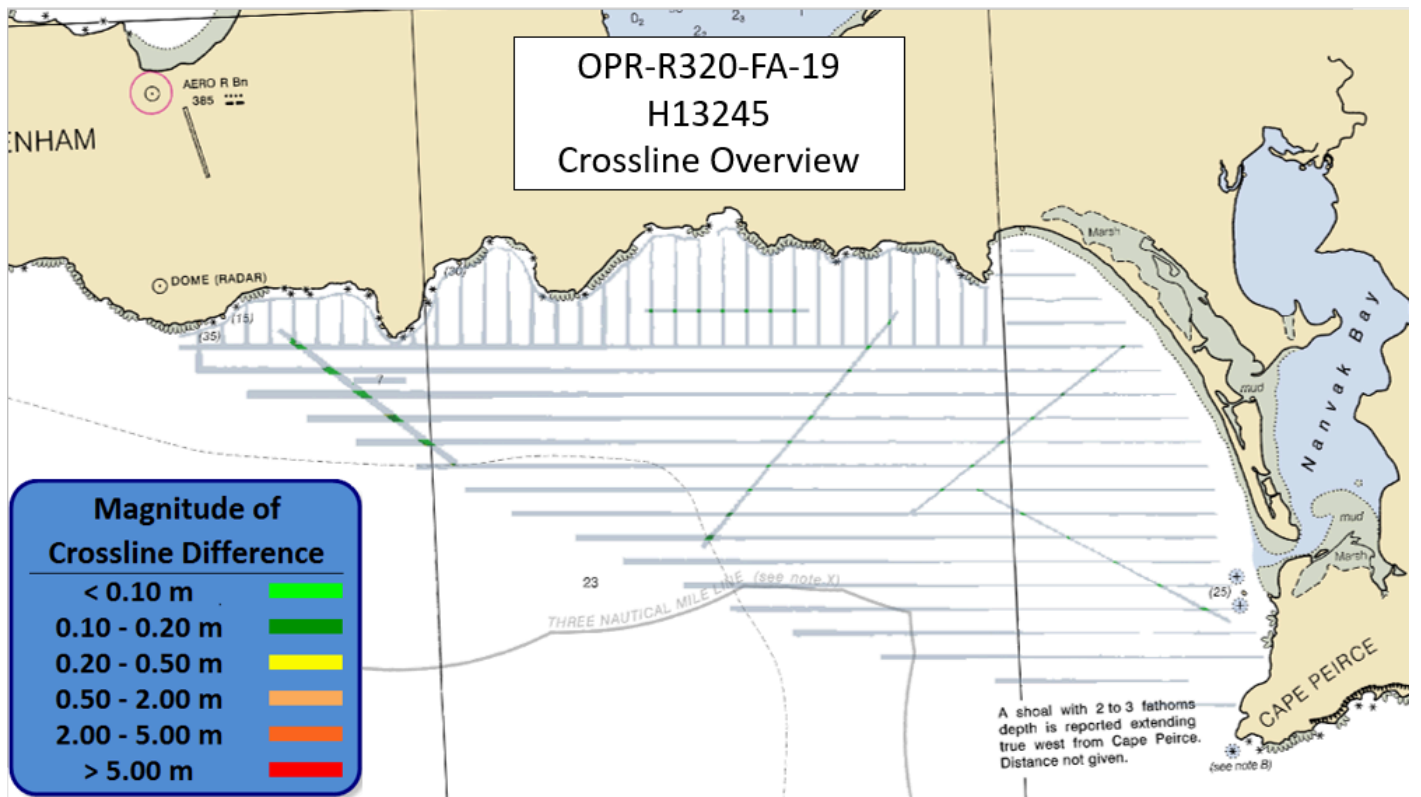


Figure 3: Overview of H13245 Crosslines

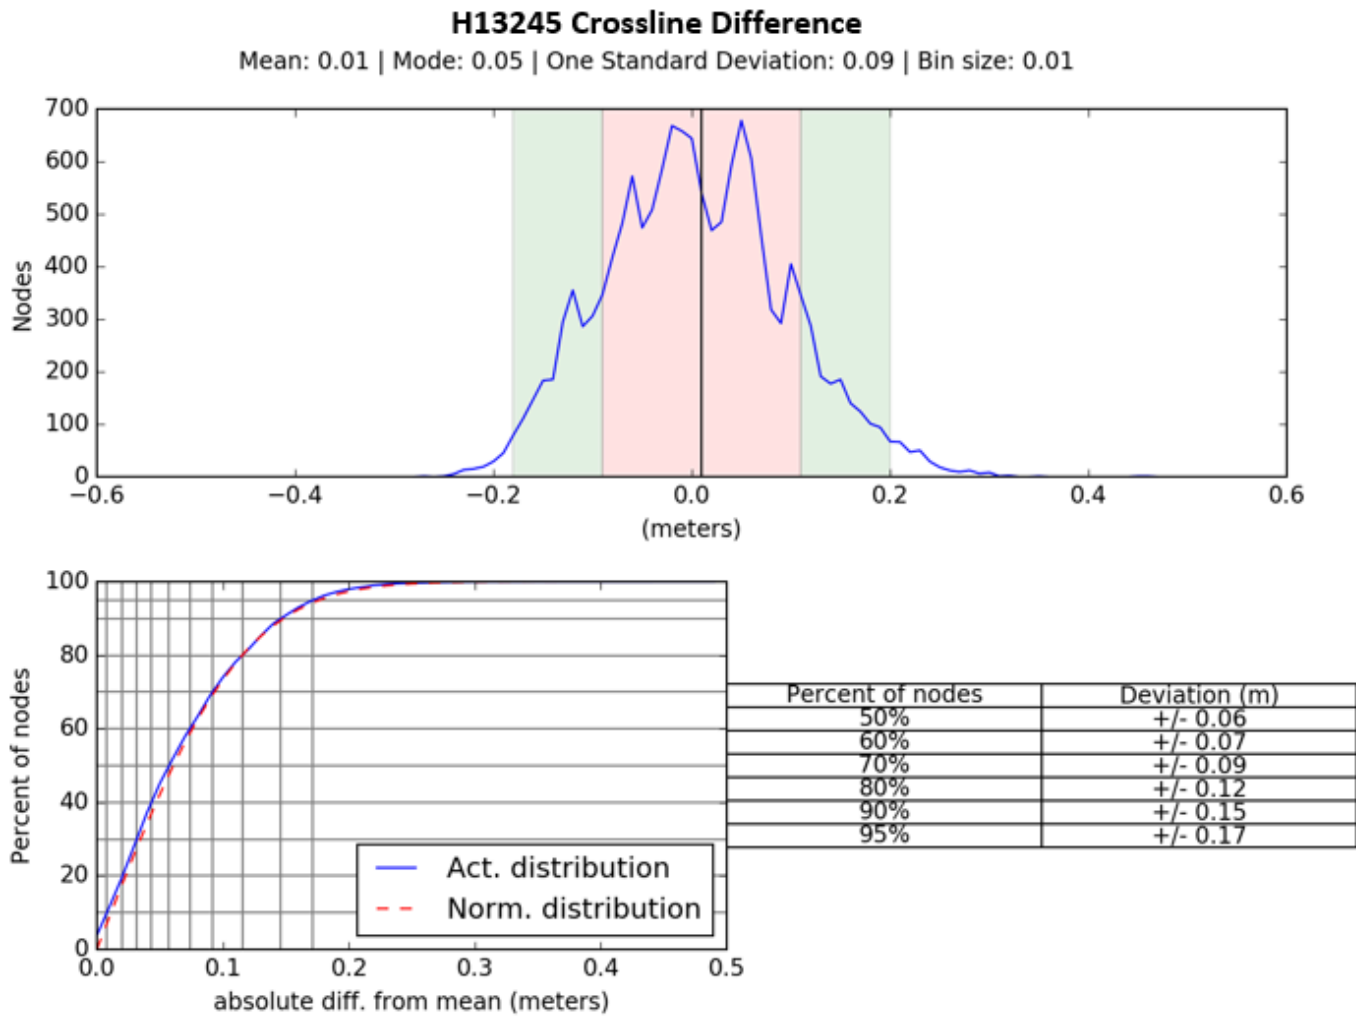


Figure 4: H13245 Crossline and Mainscheme Difference Statistics

B.2.2 Uncertainty

The following survey specific parameters were used for this survey:

Method	Measured	Zoning
ERS via ERTDM	0.14 meters	0 fathoms

Table 7: Survey Specific Tide TPU Values.

Hull ID	Measured - CTD	Measured - MVP	Surface
2805	2 meters/second	N/A meters/second	0.5 meters/second
2807	2 meters/second	N/A meters/second	0.5 meters/second

Table 8: Survey Specific Sound Speed TPU Values.

In addition to the usual a priori estimates of uncertainty provided via device models for vessel motion and ERTDM, real-time and post-processed uncertainty sources were also incorporated into the depth estimates of survey H13245. Real-time uncertainties were provided via EM2040 MBES data and Applanix Delayed Heave RMS. Following post-processing of the real-time vessel motion, recomputed uncertainties of vessel roll, pitch, gyro and navigation were applied in CARIS HIPS and SIPS via a Smoothed Best Estimate of Trajectory (SBET) RMS file generated in Applanix POSPac.

B.2.3 Junctions

H13245 junctions with two adjacent surveys from this project, H13238 and H13239, as shown in Figure 5. Data overlap between H13245 and each adjacent survey was achieved. These areas of overlap between surveys were reviewed in CARIS HIPS and SIPS by surface differencing (at equal resolutions) to assess surface agreement. The multibeam data were also examined in CARIS Subset Editor for consistency and agreement. The junctions with H13245 are generally within the NOAA allowable uncertainty in their areas of overlap. For all junctions with H13245, a negative difference indicates H13245 was shallower and a positive difference indicates H13245 was deeper.

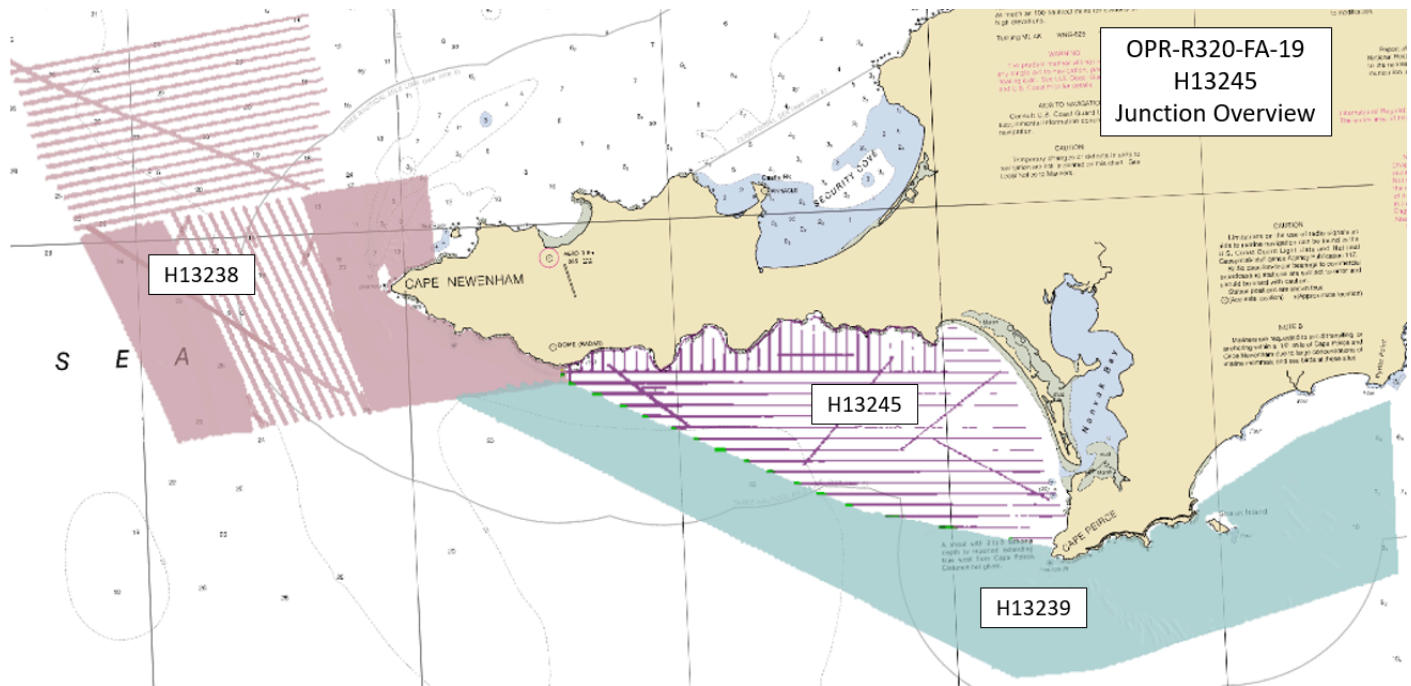


Figure 5: Overview of H13245 junction surveys

The following junctions were made with this survey:

Registry Number	Scale	Year	Field Unit	Relative Location
H13238	1:40000	2019	NOAA Ship FAIRWEATHER	W
H13239	1:40000	2019	NOAA Ship FAIRWEATHER	S

Table 9: Junctioning Surveys

H13238

Surface differencing in CARIS HIPS and SIPS was used to assess junction agreement between the surface from H13245 and the surface from H13238 (Figure 6). The statistical analysis of the difference surface shows a mean of 0.04 meters with 95% of the nodes having a maximum deviation of +/- 0.24 meters, as seen in Figure 7. It was found that 99.5+% of nodes are within NOAA allowable uncertainty.

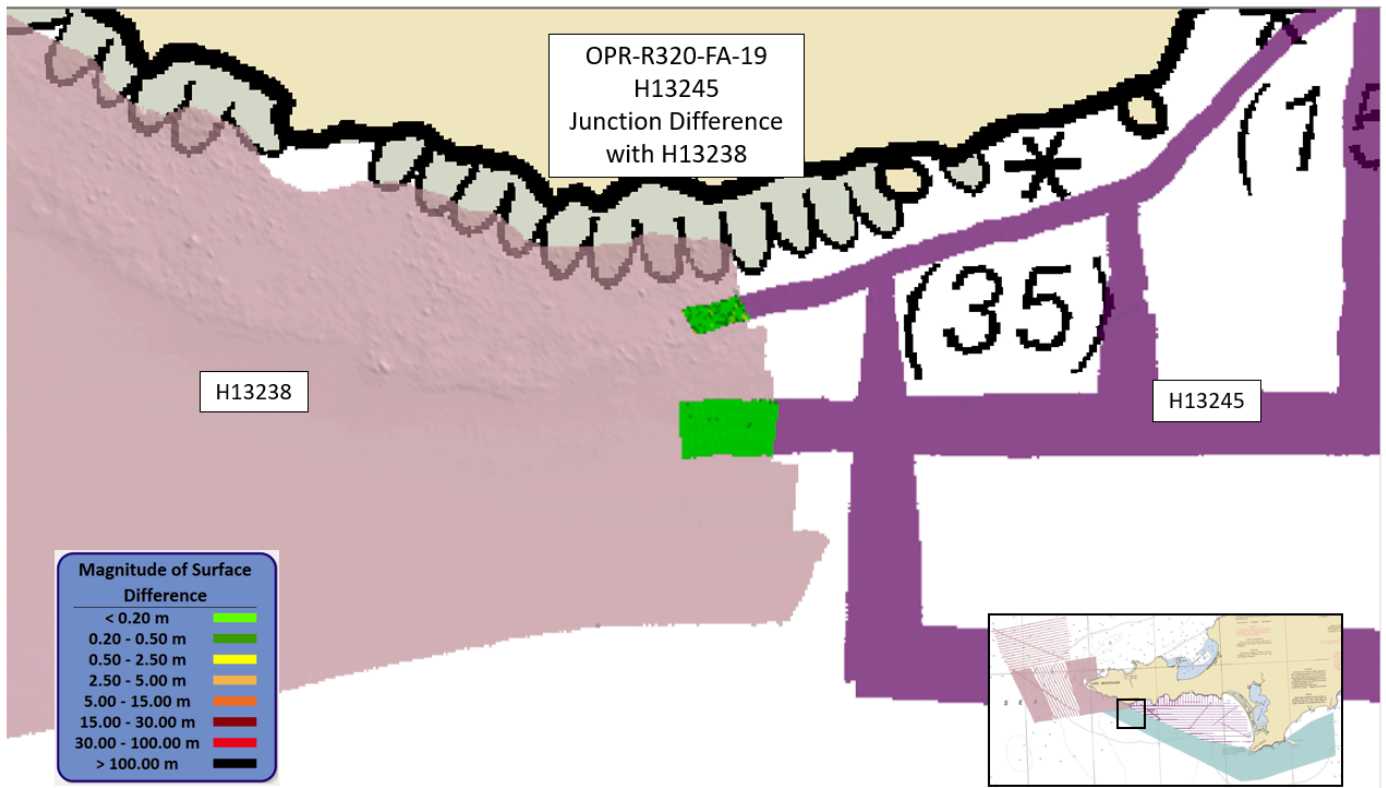


Figure 6: Difference surface between H13245 (purple) and junctioning survey H13238 (pink)

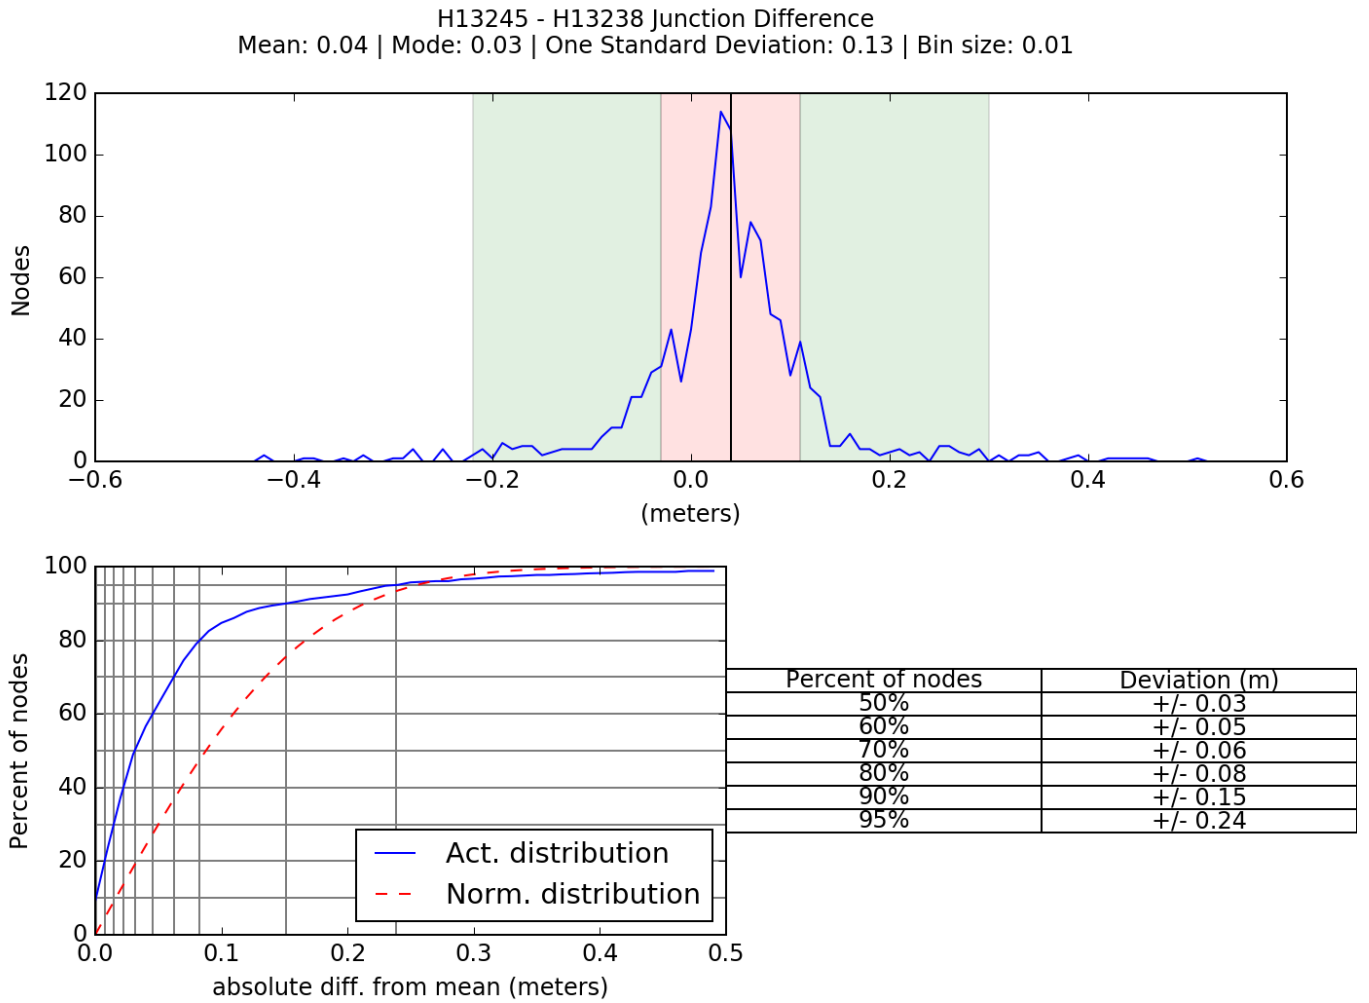


Figure 7: Difference surface statistics between H13245 and H13238 (4 meter surface)

H13239

Surface differencing in CARIS HIPS and SIPS was used to assess junction agreement between the surface from H13245 and the surface from H13239 (figure 8). The statistical analysis of the difference surface shows a mean of -0.02 meters with 95% of the nodes having a maximum deviation of +/- 0.20 meters, as seen in Figure 9. It was found that 99.5+% of nodes are within NOAA allowable uncertainty.

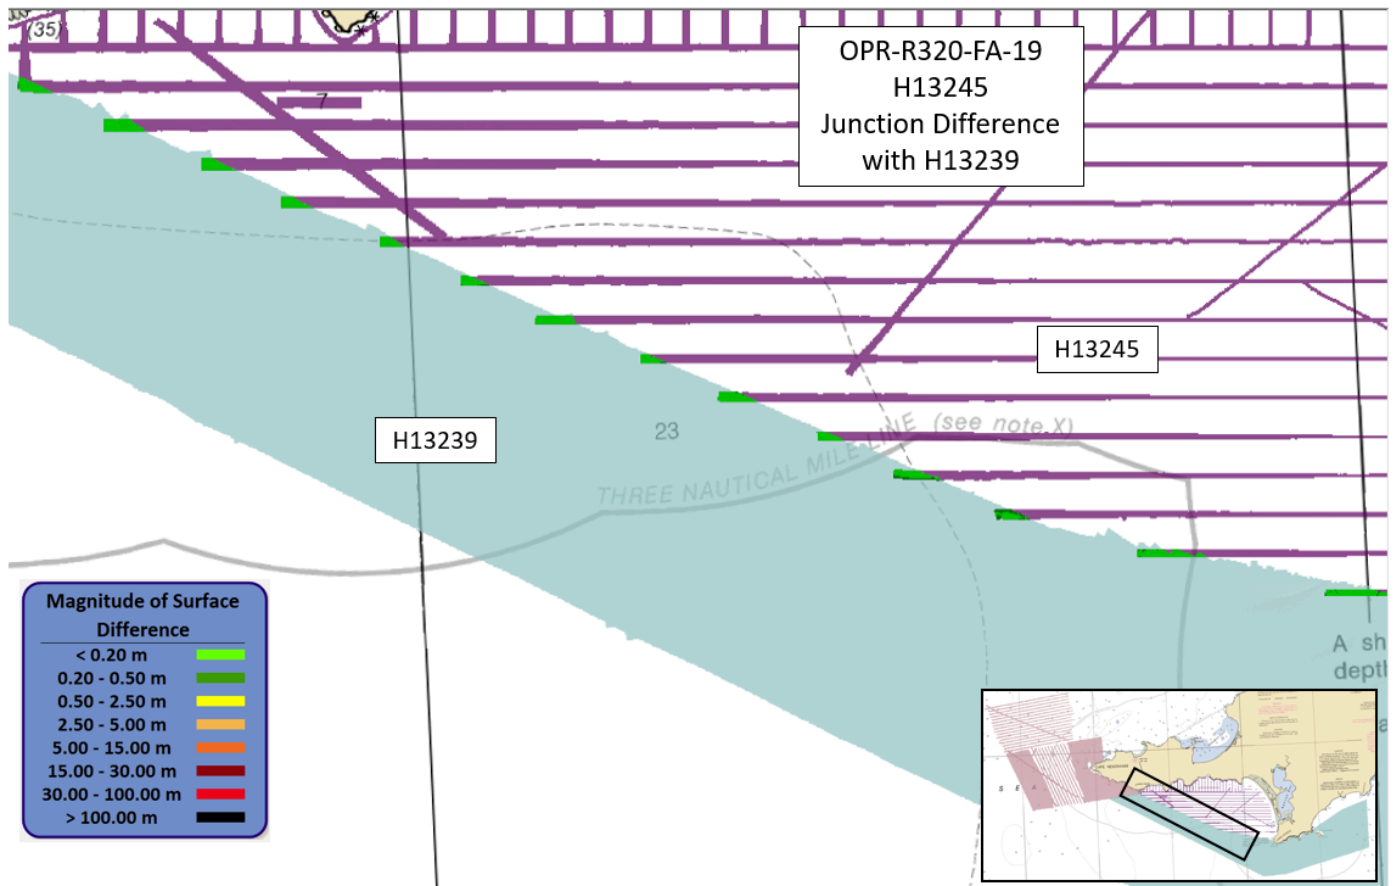


Figure 8: Difference surface between H13245 (purple) and junctioning survey H13239 (light blue)

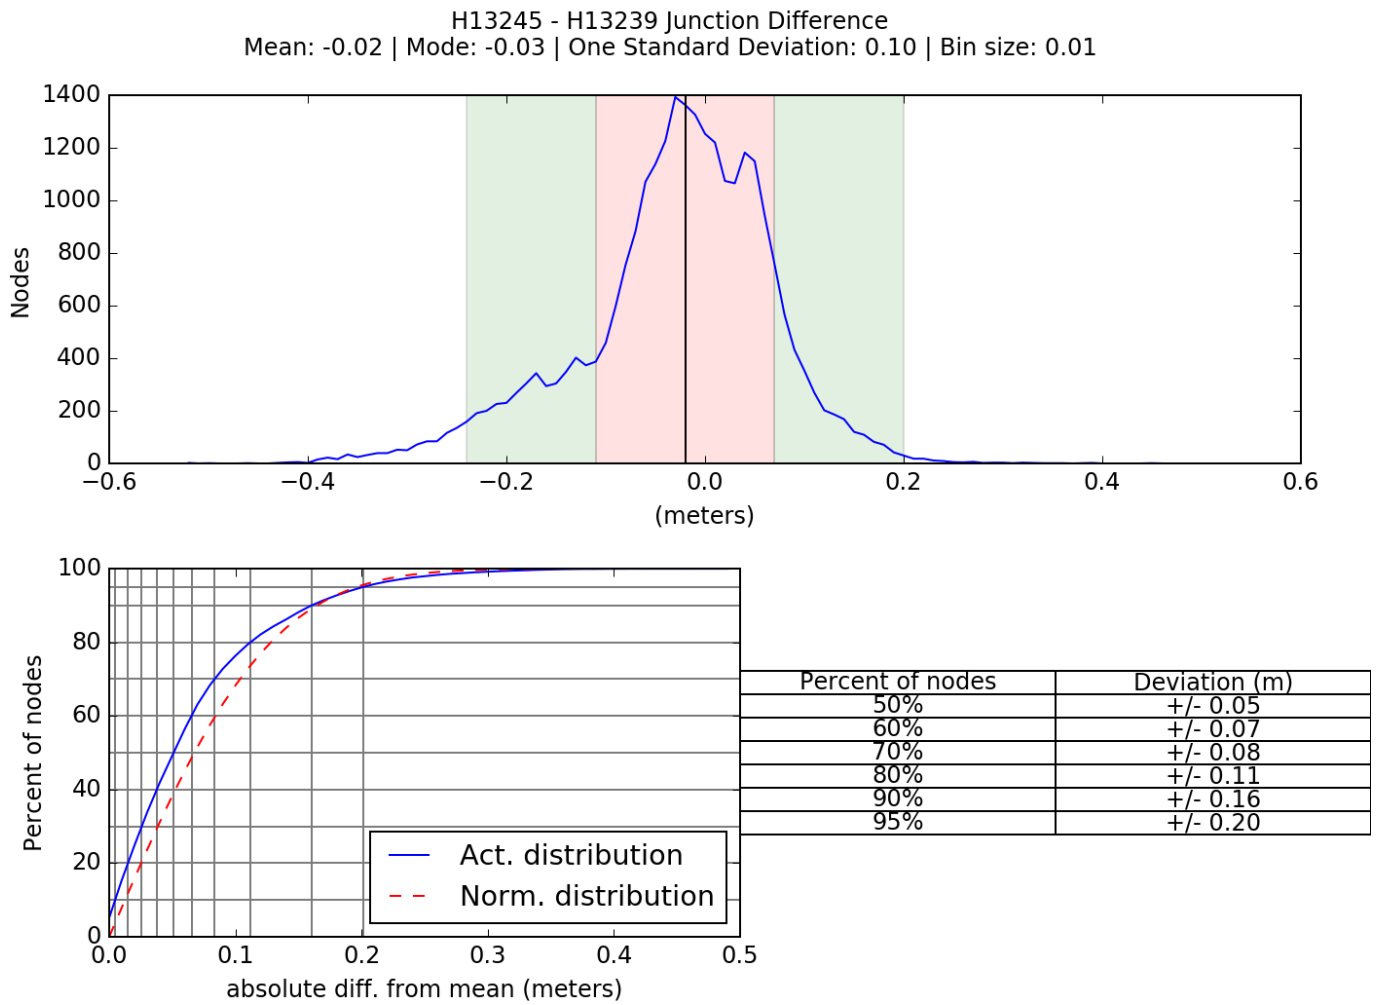


Figure 9: Difference surface statistics between H13245 and H13239 (4 meter surface)

B.2.4 Sonar QC Checks

Sonar system quality control checks were conducted as detailed in the quality control section of the DAPR.

B.2.5 Equipment Effectiveness

There were no conditions or deficiencies that affected equipment operational effectiveness.

B.2.6 Factors Affecting Soundings

There were no other factors that affected corrections to soundings.

B.2.7 Sound Speed Methods

Sound Speed Cast Frequency: Casts were conducted at a minimum of one every four hours during launch acquisition. Casts were conducted more frequently in areas where the influx of freshwater had an effect on the speed of sound in the water column and when there was a change in surface sound speed greater than two meters per second. All sound speed methods were used as detailed in the DAPR.

B.2.8 Coverage Equipment and Methods

All equipment and survey methods were used as detailed in the DAPR.

B.2.9 NOAA Allowable Uncertainty

The surface was analyzed using the HydrOffice QC Tools Grid QA feature to determine compliance with specifications. Overall greater than 99.5% of nodes within the surface meet NOAA Allowable Uncertainty specifications for H13245.

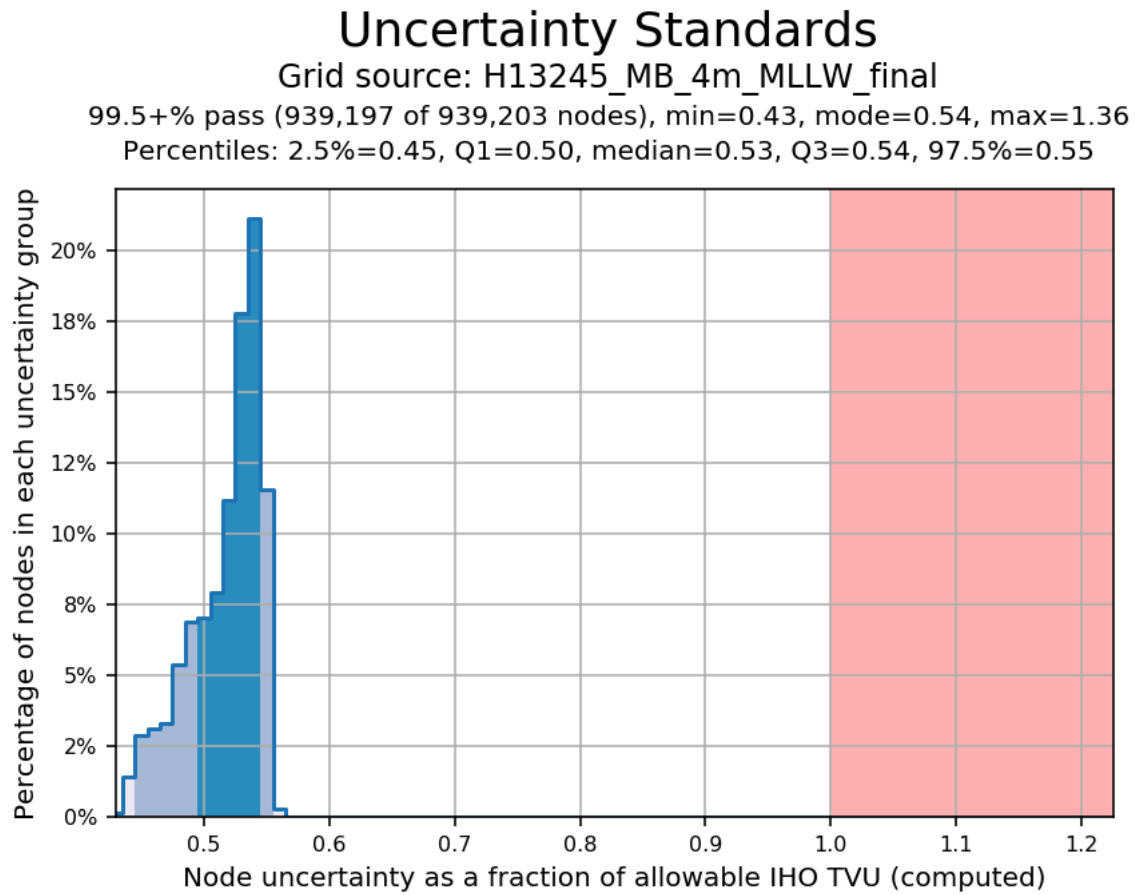


Figure 10: H13245 Allowable uncertainty statistics

B.2.10 Density

The surface was analyzed using the HydrOffice QC Tools Grid QA feature to determine compliance with specifications. Density requirements for H13245 were achieved with at least 99.5% of surface nodes containing five or more soundings as required by HSSD Section 5.2.2.3.

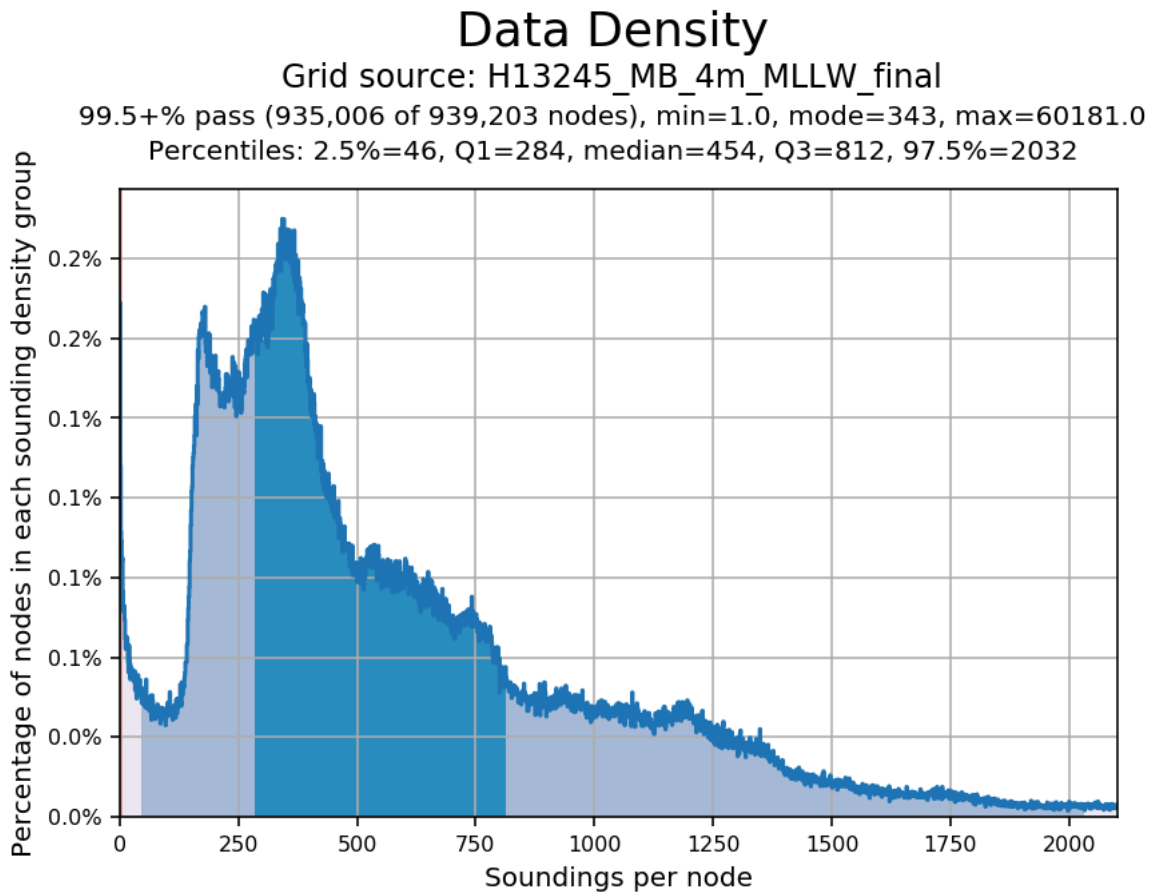


Figure 11: H13245 Data density statistics

B.3 Echo Sounding Corrections

B.3.1 Corrections to Echo Soundings

To compensate for the relatively high uncertainty of the data in the outer beams of the tracklines which led to excessive fliers, all data outside of 60 degrees from nadir were filtered following conversion via the Swath HIPS Data Filter.

For clarification: Excessive fliers in the outer beam data is due to the geometry and acoustics of the outer beams, not uncertainty.

B.3.2 Calibrations

All sounding systems were calibrated as detailed in the DAPR.

B.4 Backscatter

Raw backscatter data were stored in the .all file for Kongsberg systems. All backscatter were processed to GSF files and a floating point mosaic was created by the field unit via Fledermaus FMGT 7.8.10. See Figure 12 for a greyscale representation of the complete mosaic.

A relative backscatter calibration was performed by HSTB via a patch test in order to bring the survey systems on each of the launches into alignment. See Figure 13 for a table of the calibration values entered into the Processing Settings within FMGT. Approximate inter-calibration corrections for offsets between sonar systems were applied to the mosaic.

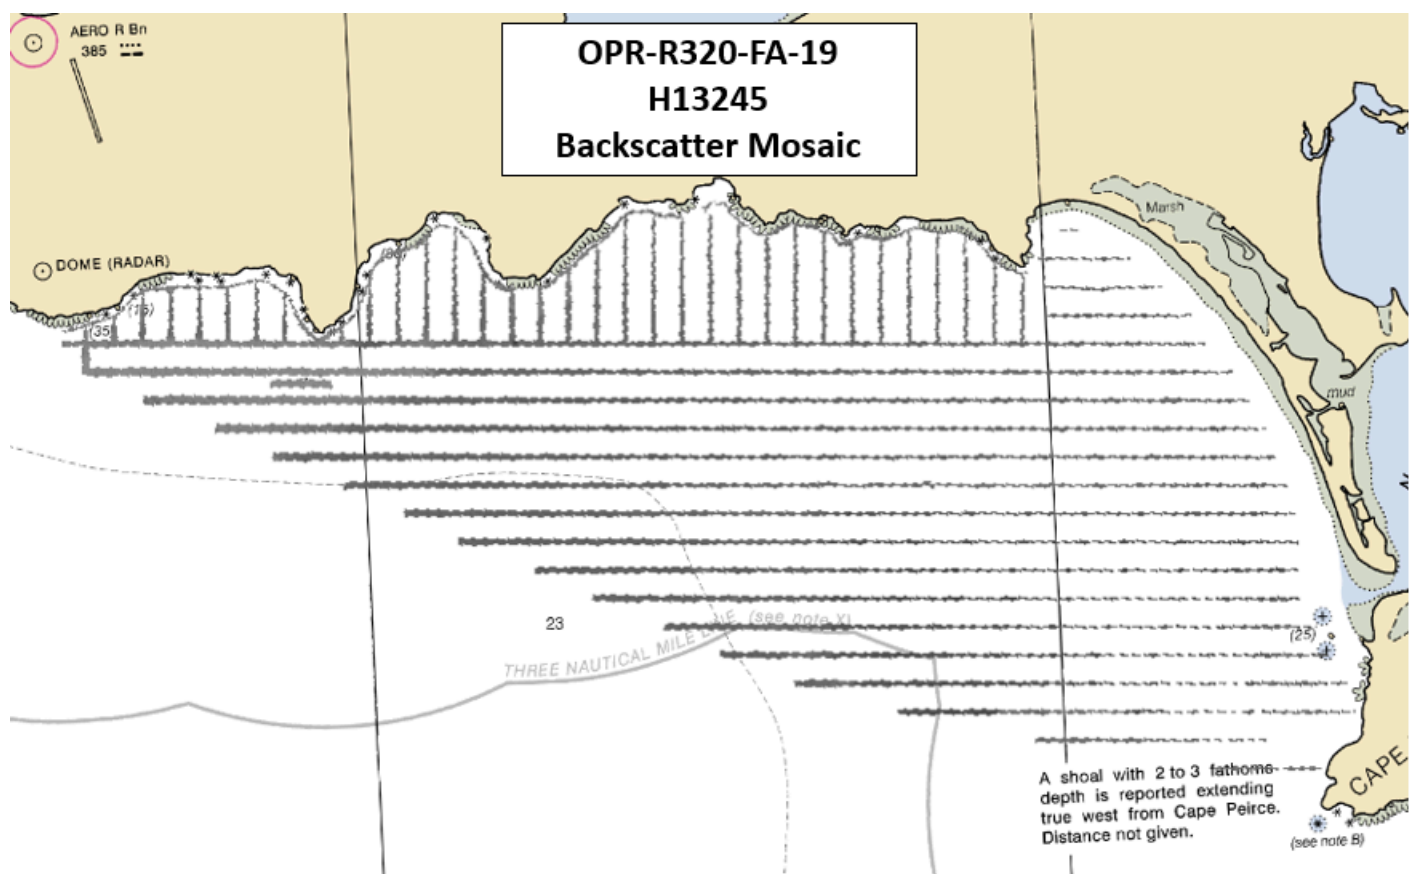


Figure 12: Backscatter Mosaic for H13245

	200				300				400		
	Short CW	Med CW	Long CW	FM (Both)	Short CW	Med CW	Long CW	FM (Both)	Short CW	Med CW	Long CW
2805	-1.1	-1.4	-1.8	2.7	-0.7	-0.9	-1.0	-1.4	3	3.9	4.8
2806	1.8	1.8	1.8	2.4	-0.1	-0.3	-0.4	-0.8	3.6	4.65	5.7
2807	-0.3	-0.15	0	0	0	-0.2	-0.3	-0.7	3.3	4.2	5.1
2808	0	0.6	1.2	1.6	-0.3	-0.5	-0.6	-1.0	1.8	2.7	3.6

Figure 13: Backscatter Calibration Values

B.5 Data Processing

B.5.1 Primary Data Processing Software

The following software program was the primary program used for bathymetric data processing:

Manufacturer	Name	Version
Teledyne CARIS	HIPS and SIPS	11.1.3

Table 10: Primary bathymetric data processing software

The following software program was the primary program used for imagery data processing:

Manufacturer	Name	Version
QPS	Fledermaus FMGT	7.8.10

Table 11: Primary imagery data processing software

The following Feature Object Catalog was used: NOAA Profile Version 2019.

B.5.2 Surfaces

The following surfaces and/or BAGs were submitted to the Processing Branch:

Surface Name	Surface Type	Resolution	Depth Range	Surface Parameter	Purpose
H13245_MB_4m_MLLW	CARIS Raster Surface (CUBE)	4 meters	0.6 meters - 34.9 meters	NOAA_4m	MBES Set Line Spacing
H13245_MB_4m_MLLW_Final	CARIS Raster Surface (CUBE)	4 meters	0.6 meters - 34.9 meters	NOAA_4m	MBES Set Line Spacing

Table 12: Submitted Surfaces

The NOAA CUBE parameters defined in the HSSD were used for the creation of all CUBE surfaces for H13245. The surfaces have been reviewed where noisy data, or "fliers" are incorporated into the gridded solutions causing the surface to be shoaler or deeper than the true sea floor. Where these spurious soundings cause the gridded surface to vary from the reliably measured seabed by greater than the maximum allowable Total Vertical Uncertainty at that depth, the noisy data have been rejected by the hydrographer and the surface recomputed.

Flier Finder, part of the QC Tools package within HydrOffice, was used to assist the search for spurious soundings following gross cleaning. Flier Finder was run iteratively until all remaining flagged fliers were deemed to be valid aspects of the surface.

B.5.3 Data Logs

Data acquisition and processing notes are included in the acquisition and processing logs, and additional processing such as final separation model reduction and sound speed application are noted in the H13245 Data Log spreadsheet. All data logs are submitted digitally in the Separates I folder.

C. Vertical and Horizontal Control

Per Section 5.1.2.3 of the Field Procedures Manual (2014 ed), no Horizontal and Vertical Control Report has been generated for H13245.

C.1 Vertical Control

The vertical datum for this project is Mean Lower Low Water.

ERS Datum Transformation

The following ellipsoid-to-chart vertical datum transformation was used:

Method	Ellipsoid to Chart Datum Separation File
ERS via ERTDM	R320FA2019_ERTDM_NAD83-MLLW.csar

Table 13: ERS method and SEP file

ERS methods were used as the final means of reducing H13245 to MLLW for submission.

C.2 Horizontal Control

The horizontal datum for this project is North American Datum of 1983 (NAD 83).

The projection used for this project is Universal Transverse Mercator (UTM) Zone 3.

The following PPK methods were used for horizontal control:

- RTX

Vessel kinematic data were post-processed using Applanix POSPac processing software and RTX positioning methods described in the DAPR. Smoothed Best Estimate of Trajectory (SBET) and associated error (RMS) data were applied to all MBES data in CARIS HIPS and SIPS.

WAAS

The Wide Area Augmentation System (WAAS) was used for real-time horizontal control during data acquisition. During real-time acquisition, 2805 and 2807 received correctors from the Wide Area Augmentation System (WAAS) for increased accuracies similar to USCG DGPS stations. WAAS and SBETs were the sole methods of positioning for H13245 as no DGPS stations were available for realtime horizontal control.

D. Results and Recommendations

D.1 Chart Comparison

A comparison was performed between survey H13245 and ENC US4AK86M using CARIS HIPS and SIPS. All data from H13245 should supersede charted data. In general, surveyed soundings do not agree with the charted depth. A full discussion of the comparisons follows in section D.1.1.

D.1.1 Electronic Navigational Charts

The following are the largest scale ENCs, which cover the survey area:

ENC	Scale	Edition	Update Application Date	Issue Date	Preliminary?
US4AK86M	1:40000	5	12/27/2017	12/27/2017	NO

Table 14: Largest Scale ENCs

US4AK86M

The ENC contained one 13.5 meter sounding in the northwest corner of H13245. The survey disproved this sounding, finding the depth to be approximately 30.5 meters.

D.1.2 Maritime Boundary Points

No Maritime Boundary Points were assigned for this survey.

D.1.3 Charted Features

No charted features exist for this survey.

D.1.4 Uncharted Features

No uncharted features exist for this survey.

D.1.5 Shoal and Hazardous Features

No shoals or potentially hazardous features exist for this survey.

D.1.6 Channels

No channels exist for this survey. There are no designated anchorages, precautionary areas, safety fairways, traffic separation schemes, pilot boarding areas, or channel and range lines within the survey limits.

D.1.7 Bottom Samples

Five bottom samples were acquired in accordance with the Project Instructions for survey H13245. One bottom sample location was adjusted from project instructions to better encompass the full range of variation in the backscatter mosaic. Due to the risk of utilizing the image grab sampler from the launches in the observed sea states while on project, the smaller, non-image recording bottom sampler was used for all samples. All five bottom samples were entered in the H13245 Final Feature File. See Figure 14 for a graphical overview of sample locations.

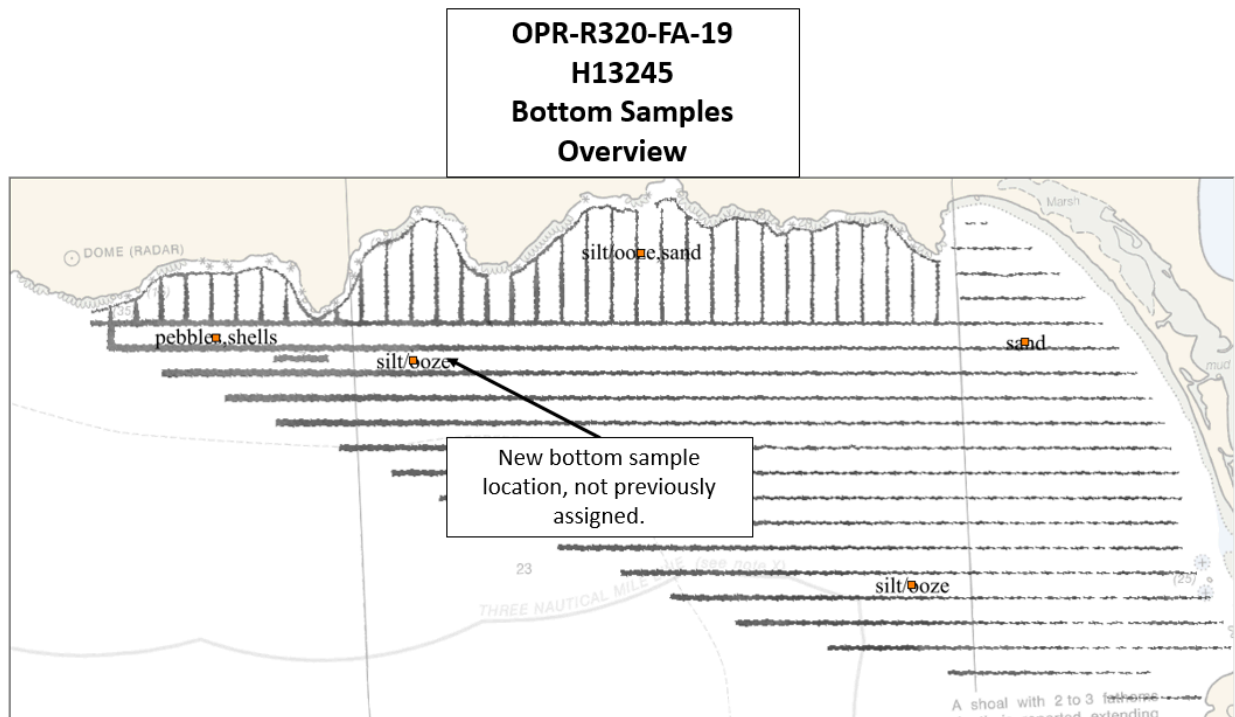


Figure 14: H13245 Bottom sample locations

D.2 Additional Results

D.2.1 Shoreline

Fairweather personnel conducted limited shoreline verification and reconnaissance, at times near predicted negative or low tides within the survey limits. Inaccessible features inshore of the NALL were attributed in the Final Feature File with the description of “Not Addressed” and remarks of “Retain as charted, not investigated due to being inshore of NALL” as per HSSD Section 7.3.1. Annotations, information, and diagrams collected on Detached Position (DP) forms and boat sheets during field operations were scanned and included in the Separates I Detached Positions folder. Shoreline verification procedures for H13245 conform to those detailed in the DAPR.

D.2.2 Aids to Navigation

No Aids to navigation (ATONs) exist for this survey.

D.2.3 Overhead Features

No overhead features exist for this survey.

D.2.4 Submarine Features

No submarine features exist for this survey.

D.2.5 Platforms

No platforms exist for this survey.

D.2.6 Ferry Routes and Terminals

No ferry routes or terminals exist for this survey.

D.2.7 Abnormal Seafloor and/or Environmental Conditions

No abnormal seafloor and/or environmental conditions exist for this survey.

D.2.8 Construction and Dredging

No present or planned construction or dredging exist within the survey limits.

D.2.9 New Survey Recommendation

No new surveys or further investigations are recommended for this area.

D.2.10 Inset Recommendation

No new insets are recommended for this area.

E. Approval Sheet

As Chief of Party, field operations for this hydrographic survey were conducted under my direct supervision, with frequent personal checks of progress and adequacy. I have reviewed the attached survey data and reports.

All field sheets, this Descriptive Report, and all accompanying records and data are approved. All records are forwarded for final review and processing to the Processing Branch.

The survey data meets or exceeds requirements as set forth in the NOS Hydrographic Surveys Specifications and Deliverables, Field Procedures Manual, Letter Instructions, and all HSD Technical Directives. These data are adequate to supersede charted data in their common areas. This survey is complete and no additional work is required with the exception of deficiencies noted in the Descriptive Report.

Approver Name	Approver Title	Approval Date	Signature
CAPT Marc Moser, NOAA	Chief of Party	09/19/2019	MOSER.MARC.ST ANTON.1163193 902  Digitally signed by MOSER.MARC.STANTON.1163193 902 Date: 2019.09.19 10:20:30 -07'00'
LT Steve Moulton, NOAA	Operations Officer	09/19/2019	MOULTON.STEPH EN.F.1282116835  Digitally signed by MOULTON.STEPHEN.F.128211683 5 Date: 2019.09.19 10:35:32 -07'00'
Sam Candio	Chief Survey Technician	09/19/2019	
LTJG Jeffrey Calderon, NOAA	Sheet Manager	09/19/2019	CALDERON.JEF FREY.DOUGLAS .1254492503  Digitally signed by CALDERON.JEFFREY.DOUG LAS.1254492503 Date: 2019.09.20 09:13:32 -07'00'

F. Table of Acronyms

Acronym	Definition
AHB	Atlantic Hydrographic Branch
AST	Assistant Survey Technician
ATON	Aid to Navigation
AWOIS	Automated Wreck and Obstruction Information System
BAG	Bathymetric Attributed Grid
BASE	Bathymetry Associated with Statistical Error
CO	Commanding Officer
CO-OPS	Center for Operational Products and Services
CORS	Continuously Operating Reference Station
CTD	Conductivity Temperature Depth
CEF	Chart Evaluation File
CSF	Composite Source File
CST	Chief Survey Technician
CUBE	Combined Uncertainty and Bathymetry Estimator
DAPR	Data Acquisition and Processing Report
DGPS	Differential Global Positioning System
DP	Detached Position
DR	Descriptive Report
DTON	Danger to Navigation
ENC	Electronic Navigational Chart
ERS	Ellipsoidal Referenced Survey
ERTDM	Ellipsoidally Referenced Tidal Datum Model
ERZT	Ellipsoidally Referenced Zoned Tides
FFF	Final Feature File
FOO	Field Operations Officer
FPM	Field Procedures Manual
GAMS	GPS Azimuth Measurement Subsystem
GC	Geographic Cell
GPS	Global Positioning System
HIPS	Hydrographic Information Processing System
HSD	Hydrographic Surveys Division

Acronym	Definition
HSSD	Hydrographic Survey Specifications and Deliverables
HSTB	Hydrographic Systems Technology Branch
HSX	Hypack Hysweep File Format
HTD	Hydrographic Surveys Technical Directive
HVCR	Horizontal and Vertical Control Report
HVF	HIPS Vessel File
IHO	International Hydrographic Organization
IMU	Inertial Motion Unit
ITRF	International Terrestrial Reference Frame
LNM	Linear Nautical Miles
MBAB	Multibeam Echosounder Acoustic Backscatter
MCD	Marine Chart Division
MHW	Mean High Water
MLLW	Mean Lower Low Water
NAD 83	North American Datum of 1983
NALL	Navigable Area Limit Line
NTM	Notice to Mariners
NMEA	National Marine Electronics Association
NOAA	National Oceanic and Atmospheric Administration
NOS	National Ocean Service
NRT	Navigation Response Team
NSD	Navigation Services Division
OCS	Office of Coast Survey
OMAO	Office of Marine and Aviation Operations (NOAA)
OPS	Operations Branch
MBES	Multibeam Echosounder
NWLON	National Water Level Observation Network
PDBS	Phase Differencing Bathymetric Sonar
PHB	Pacific Hydrographic Branch
POS/MV	Position and Orientation System for Marine Vessels
PPK	Post Processed Kinematic
PPP	Precise Point Positioning
PPS	Pulse per second

Acronym	Definition
PRF	Project Reference File
PS	Physical Scientist
RNC	Raster Navigational Chart
RTK	Real Time Kinematic
RTX	Real Time Extended
SBES	Singlebeam Echosounder
SBET	Smooth Best Estimate and Trajectory
SNM	Square Nautical Miles
SSS	Side Scan Sonar
SSSAB	Side Scan Sonar Acoustic Backscatter
ST	Survey Technician
SVP	Sound Velocity Profiler
TCARI	Tidal Constituent And Residual Interpolation
TPU	Total Propagated Uncertainty
USACE	United States Army Corps of Engineers
USCG	United States Coast Guard
UTM	Universal Transverse Mercator
XO	Executive Officer
ZDF	Zone Definition File

APPROVAL PAGE

H13245

Data meet or exceed current specifications as certified by the OCS survey acceptance review process. Descriptive Report and survey data except where noted are adequate to supersede prior surveys and nautical charts in the common area.

The following products will be sent to NCEI for archive

- Descriptive Report
- Collection of Bathymetric Attributed Grids (BAGs)
- Collection of backscatter mosaics
- Processed survey data and records
- Bottom samples
- GeoPDF of survey products

The survey evaluation and verification has been conducted according current OCS Specifications, and the survey has been approved for dissemination and usage of updating NOAA's suite of nautical charts.

Approved: _____
Commander Olivia Hauser, NOAA
Chief, Pacific Hydrographic Branch